




Schaltschrankheizungen / Heater
Serie FH lüfterlos

Schaltschrank-Heizungen dienen zur gleichmäßigen Temperierung von Schaltschränken und Gehäusen mit elektronischen Einbauten. Dadurch werden Kondensatbildung oder Frost und daraus folgende Funktionsstörungen vermieden. Die Steuerung erfolgt in der Regel durch ein Thermostat oder Hygrostat. Mit den geringen Abmessungen eignen sich die Heizungen der Serie FH besonders für den Einsatz in Schränken mit Platzmangel und mit hoher Bestückungsdichte.

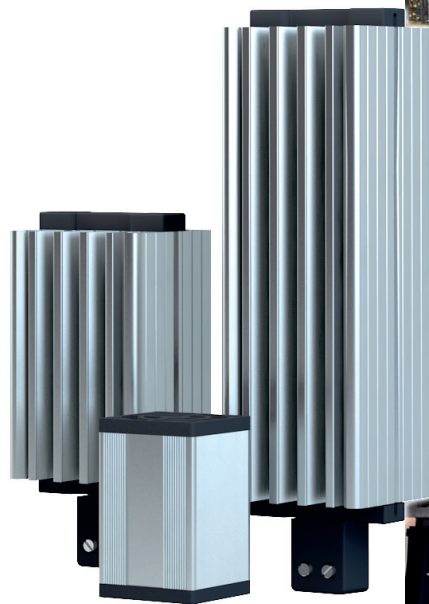

- Kaltleiter (PTC), selbstregelnd
- Abstrahlwärme
- 2-adrig, Schutzklasse II
- Weitere Spannungen auf Anfrage
-  US Varianten auf Anfrage

Cabinet heaters provide an even distributed interior air temperature in enclosures with electric/electronic components. This prevents the formation of condensate and prevents resulting malfunctions. The heaters are controlled usually with a thermostat or hygrostat. The small size of the compact heaters of series FH makes them ideal for use in enclosures where space is rare and the built in components are strongly packed.



- PTC resistor, self regulating
- Radiation heat
- 2-wire, protection class II
- Other voltages on request
-  US versions on request

Serie FH lüfterlos	Type Model	Heizleistung Heating power	Anschlussart Connection	Schutzart IP rate	Anlaufstrom Starting current	Spannung Voltage	Abmessungen Dimensions	
Bestell-Nr./Order-No.		W (Tu = 20°C)			A		B × H × T (mm)	
13.AXM0.0015.1215	FH-AM0-0015	15	400mm Kabel	20		2	120-240 VAC/DC	40 × 55 × 40
13.AXS0.0015.1215	FH-AS0-0015	15	400mm Kabel	20		4	120-240 VAC/DC	80 × 50 × 50
13.AXS0.0025.1115	FH-AS0-0025	25	Schraubklemme	20		4	120-240 VAC/DC	80 × 90 × 50
13.AXS0.0025.1215	FH-AS0-0025	25	400mm Kabel	20		4	120-240 VAC/DC	80 × 60 × 50
13.AXM0.0030.1215	FH-AM0-0030	30	400mm Kabel	20		3	120-240 VAC/DC	40 × 65 × 40
13.AXM0.0050.1115	FH-AM0-0050	50	Schraubklemme	20		4	120-240 VAC/DC	61 × 140 × 59
13.AXS0.0050.1215	FH-AS0-0050	50	400mm Kabel	20		4	120-240 VAC/DC	80 × 80 × 50
13.AXM0.0075.1115	FH-AM0-0075	75	Schraubklemme	20		4	120-240 VAC/DC	61 × 140 × 59
13.AXM0.0100.1115	FH-AM0-0100	100	Schraubklemme	20		5	120-240 VAC/DC	61 × 140 × 59
13.AXM0.0150.1115	FH-AM0-0150	150	Schraubklemme	20		9,5	120-240 VAC/DC	61 × 220 × 59

