
RO1379

Incremental encoder with hollow shaft

RO-3600-IO5/N1U

Article no longer available - archive entry

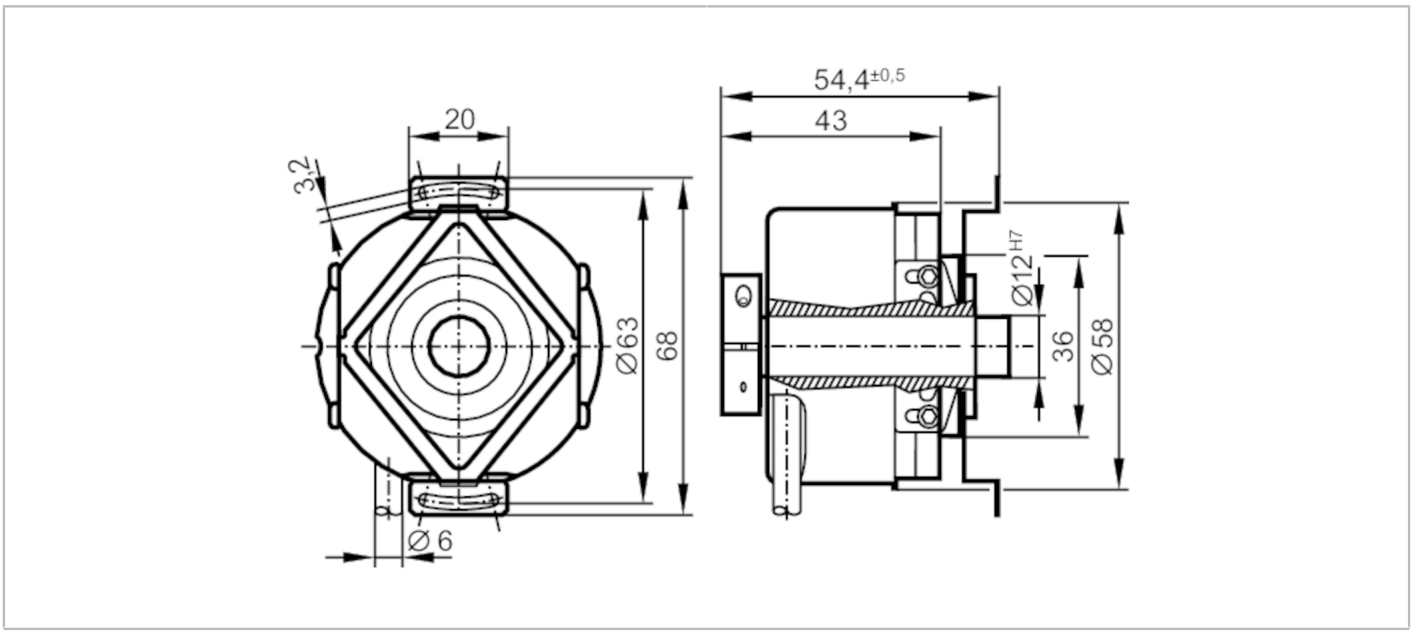

CE

Product characteristics		
Resolution		3600 resolution
Shaft design		continuous hollow shaft
Shaft diameter	[mm]	12
Application		
Function principle		incremental
Electrical data		
Operating voltage tolerance	[%]	10
Operating voltage	[V]	5 DC
Current consumption	[mA]	< 150
Outputs		
Electrical design		TTL
Max. current load per output	[mA]	20
Switching frequency	[kHz]	300
Phase difference A und B	[°]	90
Measuring/setting range		
Resolution		3600 resolution
Operating conditions		
Ambient temperature	[°C]	-30...100
Storage temperature	[°C]	-30...100
Max. relative air humidity	[%]	75; (briefly: 95 %; Condensation not permissible)
Protection		IP 64

RO1379

Incremental encoder with hollow shaft

RO-3600-IO5/N1U

Tests / approvals		
Shock resistance		100 g (6 ms)
Vibration resistance		30 g (55...2000 Hz)

Mechanical data		
Weight	[g]	450.4
Dimensions	[mm]	Ø 58 / L = 54.4
Material		aluminum
Max. revolution, mechanical	[U/min]	12000; (when using both shaft clamping rings)
Max. starting torque	[Nm]	2.5
Reference temperature torque	[°C]	20
Shaft design		continuous hollow shaft
Shaft diameter	[mm]	12
Shaft fit		H7
Shaft material		stainless steel
Installation depth/shaft	[mm]	15...24
Max. axial shaft misalignment	[mm]	1


Electrical connection

Cable: 1 m, PUR; radial

brown	A
green	A inverted
grey	B
pink	B inverted
red	0 index
black	0 index inverted
blue	L+ sensor
white	0V sensor
brown/green	L+ (Up)
white/green	0V (Un)
lilac	error inverted
screen	housing

Diagrams and graphs

Pulse diagram



Output A

Output B

0 index