
SBG457

Flow transmitters with fast response time

SBG54HF010KG/US

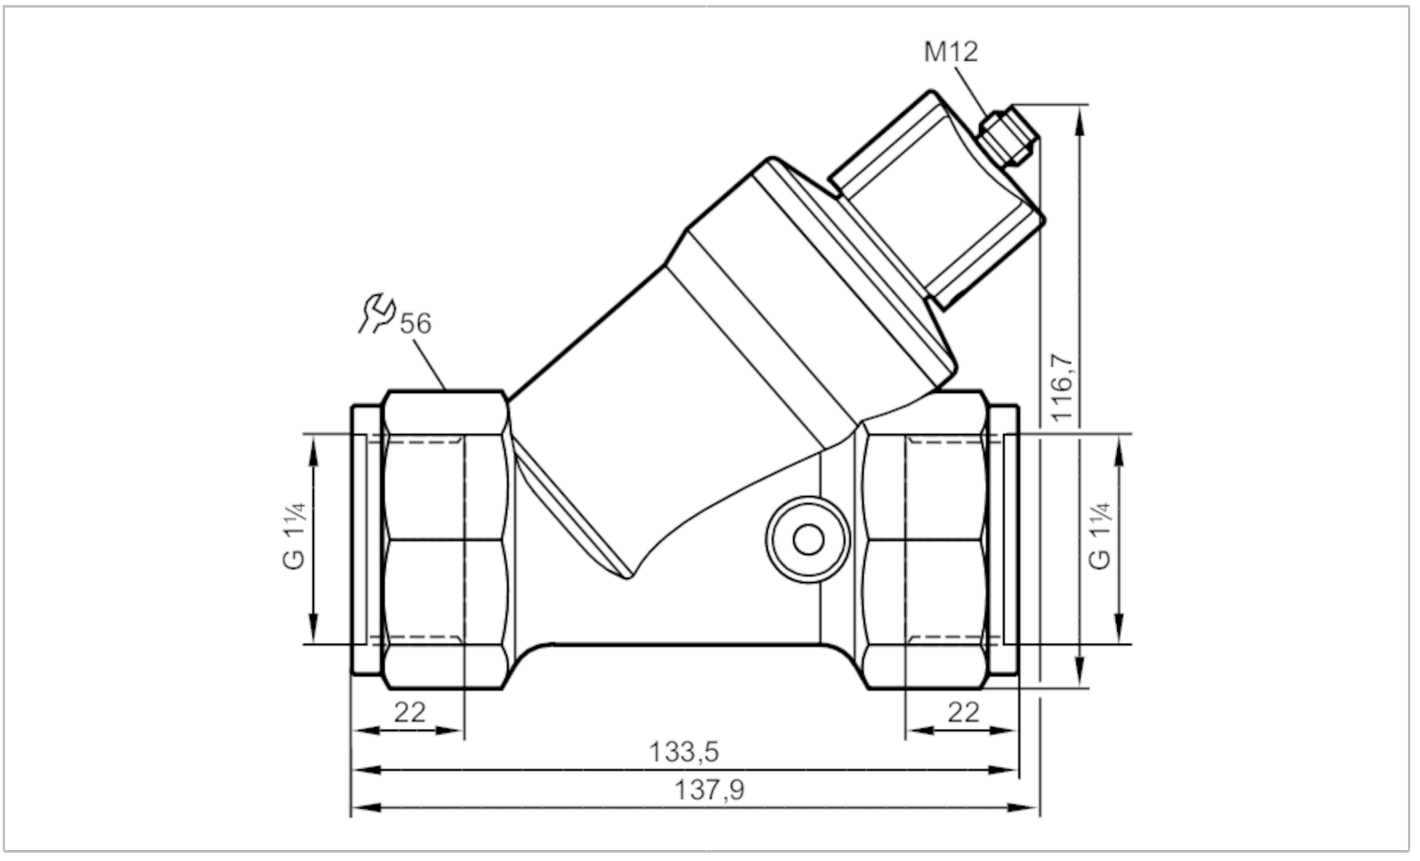

Product characteristics		
Measuring range	[l/min]	8...200
Process connection		threaded connection G 1 1/4
Application		
Media		Liquids; water; glycol solutions; Coolants
Medium temperature	[°C]	-10...100
Pressure rating	[bar]	25
Pressure rating	[Mpa]	2.5
Electrical data		
Operating voltage	[V]	18...32 DC; (to SELV/PELV)
Current consumption	[mA]	< 35
Protection class		III
Reverse polarity protection		yes
Outputs		
Output signal		analog signal
Analog current output	[mA]	4...20
Max. load	[Ω]	500
Short-circuit protection		yes
Overload protection		yes

SBG457

Flow transmitters with fast response time

SBG54HF010KG/US

Measuring/setting range			
Measuring range	[l/min]	8...200	
Accuracy / deviations			
Repeatability [% of the final value]		1	
Measuring error [% of the final value]		± 5	
Reaction times			
Response time	[s]	< 0.01	
Operating conditions			
Ambient temperature	[°C]	0...60	
Storage temperature	[°C]	-15...80	
Protection		IP 65; IP 67	
Tests / approvals			
EMC		DIN EN 61000-6-2	
		DIN EN 61000-6-3	
Shock resistance		DIN EN 60068-2-27	20 g (11 ms)
Vibration resistance		DIN EN 60068-2-6	5 g (10...2000 Hz)
MTTF	[years]	778	
Mechanical data			
Weight	[g]	1898.8	
Material		brass chemically nickel-plated; PP; stainless steel (1.4404 / 316L); aluminum anodized; PA	
Materials (wetted parts)		stainless steel (1.4401 / 316); brass; brass chemically nickel-plated; PP; PPS; O-ring: FKM	
Process connection		threaded connection G 1 1/4	
Switching cycles mechanical		10 million	
Remarks			
Remarks		Recommendation Use 200 micron filtration	
		All data refer to water (20 °C).	
Pack quantity		1 pcs.	

Electrical connection

Connector: 1 x M12; coding: A




SBG457

Flow transmitters with fast response time

SBG54HF010KG/US

Connection

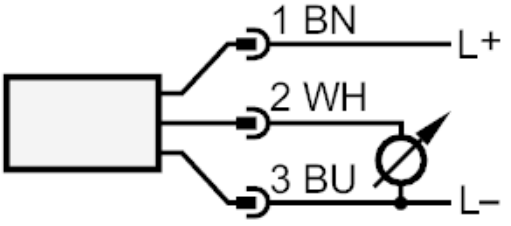

Colors to DIN EN 60947-5-2

Core colors :


BN = brown

BU = blue

WH = white

Diagrams and graphs

Pressure loss

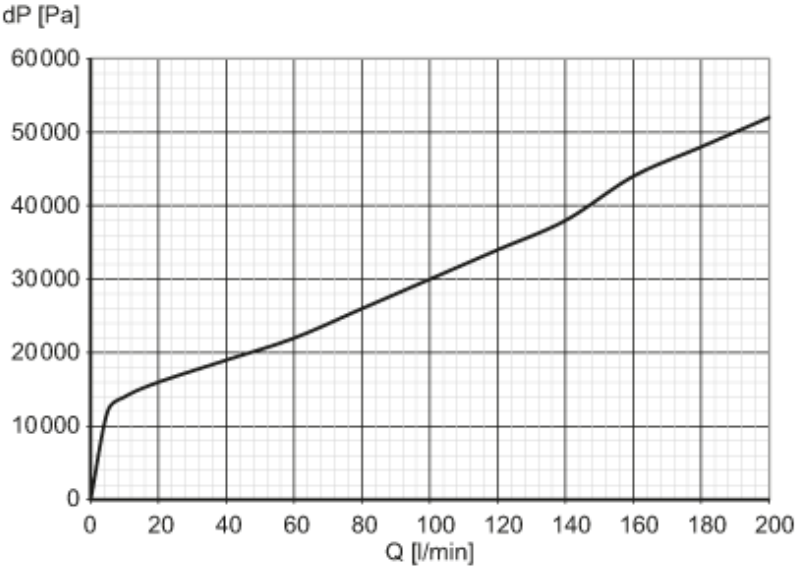

dP Pressure loss

Q volumetric flow quantity