

ZMD402AT/CT, ZFD402AT/CT

## E650 Series 3

Technical Data



Building on its tradition of industrial meters, Landis+Gyr has developed the E650 Series 3, the latest generation of ZxD400 meters. These meters feature a new hardware platform, combining modern technology with proven functions.

Date: 30.01.2014

File name: D000030718 E650 ZxD402xT Series 3 Technical Data en p.docx

## Revision history

| Version | Date       | Comments                                                                                                                                                                                                                                                               |
|---------|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| f       | 27.01.2011 | Updated document template and type designation table entry "045x 4 outputs, additional power supply 100-240 VAC/VDC"                                                                                                                                                   |
| g       | 28.01.2011 | Minor layout update                                                                                                                                                                                                                                                    |
| h       | 28.01.2011 | Template update                                                                                                                                                                                                                                                        |
| m       | 15.10.2012 | Introduction text extended and summary of main features inserted. Immunity conducted disturbances specified. New extension board 326x. ADP1 adapter replaced with ADP2 adapter. Minor formatting and typing error corrections. Index synchronized with German version. |
| p       | 30.01.2014 | Added extension board 047x.                                                                                                                                                                                                                                            |

Although the information contained within this document are presented in good faith and believed to be correct, Landis+Gyr (including its affiliates, agents and employees) disclaim any and all liability for any errors, inaccuracies or incompleteness relating to the product. Landis+Gyr makes no warranty, representation or guarantee regarding the performance, quality, durability or suitability of the products for any particular purpose. To the fullest extent permitted by law Landis+Gyr disclaims (1) any and all liability arising out of the use of the product, (2) any and all liability, including, but without limitation to, special, consequential and indirect damages and losses, and (3) any and all implied warranties, including, but without limitation to, fitness for purpose and merchantability.

The information contained in this document is strictly confidential and is intended for the addressee only. The unauthorised use, disclosure, copying, alteration or distribution of this document or the contents thereof is strictly prohibited and may be unlawful.

All product information are subject to change without notice.

## Design

E650 is the most proven platform for industrial and commercial meters with more than 1.5 million meters installed in over 70 countries.

E650 is the result of a century Landis+Gyr experience in metering field combined with high quality requirements.

## Range

E650 meters are the answer to a wide range of specific needs: from the reliable commercial meter to the complex measuring device with comprehensive additional functionality for sophisticated data acquisition and flexible tariff control at large industrial customers.

## Application

E650 offers high flexibility to connect to different power system distributions from low up to high voltage levels thanks to various voltage and current settings.

Covering most of the energy measurement and calculation use cases, E650 meters record active and reactive energy consumption in all three-phase four-wire and three-phase three-wire networks with powerful recording capabilities.

For instance, 32 energy rate registers can be combined in many different ways through 17 measured quantities, per quadrants or per phases. Those registers can be controlled by various sources (Control inputs, time switch or communication signals). 24 max demand rate registers and 2 lowest power factor registers with time stamp are available as well.

8 operating time registers settable with various control signals could be used in various situations from fraud tentatives up to operation follow up.

All registers can be stored in stored value profiles that allows the storage of 84 values for one year with a weekly reset.

One out of 2 load profiles available can be used to record energy registers, last average demand, average power factor for billing purposes in the case of dynamic tariffs, for instance, with an integration period programmable according to real needs.

E650 has various options to detect fraud attempts from energy calculation modes up to hardware options as DC – strong field detection or integrated terminal cover detection switch with time stamped records in the event logbook and optional local signalisation over a special LED or arrows on the LCD display.

In the Time of Use part the utility can define up to 12 different week/season tables, 100 special days and 12 day tables that are controlled by 16 time switch control signals. Programmable passive tables and emergency settings allow to manage unexpected or future situations without any additional workload.

A comprehensive logbook offers the possibility to record more than 70 different events with time stamp in a circular table of 500 events.

E650 can be used for network monitoring with key average measurement RMS recordings (U, I, P, Q, PF, THD).

Up to 26 channels can be recorded in a second load profile with a different integration period programmable from 1 minute up to 60 minutes which allows an excellent network monitoring.

Most power quality events (over-/ undervoltages, power failures) are logged in dedicated event logs with number of event, timestamp, duration, magnitude and phase allowing an easy calculation of SAIDI (System Average Interruption Duration Index) parameters. Up to 30 events can be recorded for over-/undervoltages and power failures each.

All information (stored data profile, load profiles, logbook, dedicated event log) are stored in non-volatile memory, which prevents any losses of critical data information.

Through a control table, it is possible to combine various signal sources to control signals with Boolean operators.

E650 is able to achieve simple automatism without any additional components.

Such control capabilities could be used not only to control registers but outputs locally or remotely as well.

E650 have extended digitals input and outputs (static and relays) from 3 inputs/2 outputs as basis combined with a variety of option boards offering different capabilities.

## Modular communication

AT/CT-type meters are equipped with modular communication units which provide the right choice for the best data channel at all times. "Plug&Play" modules also offer you full freedom of choice for deployment of new communication technologies.

## Installation support

An indication of phase voltages, phase angles, rotating field and energy direction supports the installation.

## Summary of the main features

|                                                                                                                 | ZMD400           | ZFD400 |
|-----------------------------------------------------------------------------------------------------------------|------------------|--------|
| <b>Measured quantities</b>                                                                                      |                  |        |
| Energy (quadrants, ph, direction, reverse stop)                                                                 | 17 <sup>1)</sup> |        |
| Summation channels (virtual or digital input)                                                                   | 2 <sup>1)</sup>  |        |
| Losses (OLA, NLA)                                                                                               | 2 <sup>1)</sup>  |        |
| Losses ( $I^2$ , $U^2$ )                                                                                        | 2 <sup>1)</sup>  |        |
| Active energy harmonic distortion                                                                               | 2 <sup>1)</sup>  |        |
| Rotating field direction                                                                                        | •                |        |
| <b>Energy and demand registers</b>                                                                              |                  |        |
| Energy rates                                                                                                    | 32               |        |
| Total energy                                                                                                    | 27               |        |
| Demand rates                                                                                                    | 24               |        |
| Power factor (combimeters only)                                                                                 | 2                |        |
| Last average and current demand                                                                                 | 2x10             |        |
| Memory depth per value (84 values selectable)                                                                   | 53               |        |
| <b>Other registers</b>                                                                                          |                  |        |
| Operating time                                                                                                  | 8                |        |
| Diagnostic registers                                                                                            | 41               |        |
| <b>Tariff module</b>                                                                                            |                  |        |
| Season tables                                                                                                   | 12               |        |
| Week tables                                                                                                     | 12               |        |
| Day tables                                                                                                      | 12               |        |
| Special days (set 26 years ahead)                                                                               | 100              |        |
| Time of use control signals                                                                                     | 16               |        |
| Emergency settings                                                                                              | •                |        |
| Active/passive time tables                                                                                      | •                |        |
| <b>Control table – 7 different control sources combinations to control 16 control signals</b>                   |                  |        |
| Communication and digital inputs, TOU;<br>Voltage & PF, demand, current monitoring;<br>Status, missing voltages | •                |        |
| <b>Load profiles (integration period from 1 up to 60 minutes)</b>                                               |                  |        |
| Independent load profiles                                                                                       | 2 (1 optional)   |        |
| Maximum number of captured channels                                                                             | 26               |        |
| <b>Data information storage (stored data profile, 2 load profiles, event log, dedicated event logs)</b>         |                  |        |
| Non-volatile memory (Flash memory)                                                                              | •                |        |

<sup>1)</sup> Value recordable in dedicated load profile from 1 up to 60 minutes (typical 15 minutes).

|                                                                  | ZMD400                              | ZFD400                            |
|------------------------------------------------------------------|-------------------------------------|-----------------------------------|
| Instantaneous values                                             |                                     |                                   |
| Voltage phase-neutral or phase-ground                            | ● <sup>2)</sup>                     | —                                 |
| Voltage phase-phase                                              | —                                   | ● <sup>2)</sup> (U1-2, U2-3 only) |
| Current                                                          | (I1, I2, I3, IN) <sup>2)</sup>      | (I1, I3) <sup>2)</sup>            |
| Frequency                                                        | ● <sup>2)</sup>                     | ● <sup>2)</sup>                   |
| Phase angles                                                     | ● <sup>2)</sup>                     | —                                 |
| Active power (+/-)                                               | (P1, P2, P3, P total) <sup>2)</sup> | P total <sup>2)</sup>             |
| Reactive power (+/-)                                             | (Q1, Q2, Q3, Q total) <sup>2)</sup> | Q total <sup>2)</sup>             |
| Power factor                                                     | PF1, 2, 3, (PF total) <sup>1)</sup> | PF total <sup>2)</sup>            |
| THD of phases current/voltage (absolute)                         | (Phase 1, 2, 3) <sup>2)</sup>       | (Phase 1, 3) <sup>2)</sup>        |
| THD of phases current/voltage (percent)                          | Sum <sup>2)</sup>                   | Sum <sup>2)</sup>                 |
| THD of active energy (import/export)                             | Sum <sup>2)</sup>                   | Sum <sup>2)</sup>                 |
| Measurements monitoring with thresholds and records in event log |                                     |                                   |
| Over-/undervoltage phase-neutral                                 | ●                                   | —                                 |
| Over-/undervoltage phase-phase                                   | —                                   | ●                                 |
| Overcurrent (phase and neutral)                                  | ●                                   | ●                                 |
| Event logs                                                       |                                     |                                   |
| Maximum number of entries time stamped (s)                       | 500                                 |                                   |
| Dedicated event log with snapshot                                |                                     |                                   |
| Maximum number of entries time stamped (s)                       | 3x30                                |                                   |
| Primary or secondary values                                      | ●                                   |                                   |
| SMS alarm capabilities                                           |                                     |                                   |
| Alarm numbers of digital inputs                                  | 1 max.                              |                                   |
| Alarms on event (SMS)                                            | ●                                   |                                   |

<sup>1)</sup> Value recordable in dedicated load profile from 1 up to 60 minutes (typical 15 minutes).

<sup>2)</sup> Value recordable in another load profile from 1 up to 60 minutes (typical 1 minute).

## E650 Series 3 ZxD402AT/CT – Technical specifications

### General

#### Voltage

|                                  |                                                                                      |
|----------------------------------|--------------------------------------------------------------------------------------|
| Nominal voltage $U_n$ ZMD402xT   | 3 x 58/100 V to 69/120 V<br>3 x 110/190 V to 133/230 V<br>3 x 220/380 V to 240/415 V |
| Extended operating voltage range | 3 x 58/100 to 240/415 V                                                              |

#### Nominal Voltage $U_n$ ZFD402xT

|                                  |                                      |
|----------------------------------|--------------------------------------|
|                                  | 3 x 100 to 120 V<br>3 x 220 to 240 V |
| Extended operating voltage range | 3 x 100 to 415 V                     |

|               |            |
|---------------|------------|
| Voltage range | 80 to 115% |
|---------------|------------|

#### Frequency

|                         |             |
|-------------------------|-------------|
| Nominal frequency $f_n$ | 50 or 60 Hz |
| Tolerance               | $\pm 2\%$   |

### IEC-specific data

#### Current

|                       |                              |
|-----------------------|------------------------------|
| Nominal current $I_n$ | 0.3 A, 1 A, 2 A, 5 A, 5  1 A |
|-----------------------|------------------------------|

#### Maximal current $I_{max}$

|                               |            |
|-------------------------------|------------|
| Metrological 0.3 A            | 1.2 A,     |
| Metrological 1 A              | 2 A, 10 A  |
| Metrological 2 A, 5 A         | 200% $I_n$ |
| Metrological 5  1 A           | 6 A        |
| Thermal 1 A, 2 A, 5 A, 5  1 A | 12 A       |

|                       |                                |
|-----------------------|--------------------------------|
| Short-circuit current | 0.5 s with $20 \times I_{max}$ |
|-----------------------|--------------------------------|

#### Measurement accuracy

##### ZxD402xT

|                                  |               |
|----------------------------------|---------------|
| Active energy, to IEC 62053-22   | class 0.2 S   |
| Reactive energy, to IEC 62053-23 | accuracy 0.5% |

#### Measurement behaviour

##### Starting current ZxD402xT

|                                                                                                |              |
|------------------------------------------------------------------------------------------------|--------------|
| According to IEC                                                                               | 0.1% $I_n$   |
| Typical                                                                                        | 0.07% $I_n$  |
| 5  1 A                                                                                         | as 1 A meter |
| The start-up of the meter is controlled by the starting power and not by the starting current. |              |

|                                    |              |
|------------------------------------|--------------|
| Starting power in M-circuit        | single phase |
| Nominal voltage x starting current |              |

|                                                 |            |
|-------------------------------------------------|------------|
| Starting power in F-circuit                     | all phases |
| Nominal voltage x starting current x $\sqrt{3}$ |            |

### General

#### Operating behaviour

##### Voltage failure (power-down)

|               |                     |
|---------------|---------------------|
| Bridging time | 0.5 s               |
| Data storage  | after another 0.2 s |
| Switch off    | after approx. 2.5 s |

##### Voltage restoration (power-up)

|                                                 |                |
|-------------------------------------------------|----------------|
| Function standby 3 phases                       | after 2 s      |
| Function standby 1 phase                        | after 5 s      |
| Detection of energy direction and phase voltage | after 2 to 3 s |

#### Power consumption

##### Power consumption per phase in voltage circuit

|                          |        |        |        |
|--------------------------|--------|--------|--------|
| Phase voltage            | 58 V   | 100 V  | 240 V  |
| Active power (typical)   | 0.4 W  | 0.5 W  | 0.7 W  |
| Apparent power (typical) | 0.8 VA | 1.0 VA | 1.7 VA |

##### Power consumption per phase in current circuit

|                          |       |          |        |
|--------------------------|-------|----------|--------|
| Phase current            | 1 A   | 5 A      | 10 A   |
| Active power (typical)   | 5 mW  | 0.125 W  | 0.5 W  |
| Apparent power (typical) | 5 mVA | 0.125 VA | 0.5 VA |

#### Environmental influences

|                   |                  |
|-------------------|------------------|
| Temperature range | to IEC 62052-11  |
| Metrological      | -10 °C to +45 °C |
| Operation limit   | -25 °C to +55 °C |
| Storage           | -40 °C to +85 °C |

##### Temperature coefficient

|                                                     |                     |
|-----------------------------------------------------|---------------------|
| Range                                               | -10 °C to +45 °C    |
| Average value (typical)                             | $\pm 0.008\%$ per K |
| at $\cos\varphi=1$ (from $0.05 I_b$ to $I_{max}$ )  | $\pm 0.01\%$ per K  |
| at $\cos\varphi=0.5$ (from $0.1 I_b$ to $I_{max}$ ) | $\pm 0.02\%$ per K  |

|                             |      |
|-----------------------------|------|
| Impermeability to IEC 60529 | IP51 |
|-----------------------------|------|

## Electromagnetic compatibility

|                          |                  |
|--------------------------|------------------|
| Electrostatic discharges | to IEC 61000-4-2 |
| Contact discharge        | 15 kV            |

|                                 |              |
|---------------------------------|--------------|
| Immunity conducted disturbances | 2 to 150 kHz |
| According to CENELEC            | TR 50579     |

|                           |                  |
|---------------------------|------------------|
| Electromagnetic RF fields | to IEC 61000-4-3 |
| 80 MHz to 2 GHz           | 10 and 30 V/m    |

|                                                          |         |
|----------------------------------------------------------|---------|
| Radio interference suppression according to IEC/CISPR 22 | class B |
|----------------------------------------------------------|---------|

|                                                                      |                  |
|----------------------------------------------------------------------|------------------|
| Fast transient burst test                                            | to IEC 61000-4-4 |
| Current and voltage circuits under load according to IEC 62053-21/23 | 4 kV             |
| Auxiliary circuits > 40 V                                            | 2 kV             |

|                              |                  |
|------------------------------|------------------|
| Fast transient surge test    | to IEC 61000-4-5 |
| Current and voltage circuits | 4 kV             |
| Auxiliary circuits > 40 V    | 1 kV             |

## Insulation strength

|                     |                             |
|---------------------|-----------------------------|
| Insulation strength | 4 kV at 50 Hz during 1 min. |
|---------------------|-----------------------------|

|                                |                 |
|--------------------------------|-----------------|
| Impulse voltage 1.2/50 $\mu$ s | to IEC 62052-11 |
| Current and voltage circuits   | 8 kV            |
| Auxiliary circuits             | 6 kV            |

|                     |                 |                                                                                     |
|---------------------|-----------------|-------------------------------------------------------------------------------------|
| Protection class II | to IEC 62052-11 |  |
|---------------------|-----------------|-------------------------------------------------------------------------------------|

## Calendar clock

|               |                                |
|---------------|--------------------------------|
| Calendar type | Gregorian or Persian (Jalaali) |
|---------------|--------------------------------|

|          |         |
|----------|---------|
| Accuracy | < 5 ppm |
|----------|---------|

|                                    |           |
|------------------------------------|-----------|
| Backup time (power reserve) meter  |           |
| With supercapacitor                | > 20 days |
| Charging time for max. backup time | 300 h     |
| With battery (optional)            | 10 years  |
| Battery type                       | CR-P2     |

## Display

|                                 |                            |
|---------------------------------|----------------------------|
| Characteristics                 |                            |
| Type                            | LCD liquid crystal display |
| Digit size in value field       | 8 mm                       |
| Number of digits in value field | up to 8                    |
| Digit size in index field       | 6 mm                       |
| Number of digits in index field | up to 8                    |

## Inputs and outputs

|                       |                                     |
|-----------------------|-------------------------------------|
| Control inputs        |                                     |
| Control voltage $U_S$ | 100 to 240 V <sub>AC</sub>          |
| Input current         | < 2 mA ohmic at 230 V <sub>AC</sub> |

|                                               |                              |
|-----------------------------------------------|------------------------------|
| Output contacts                               |                              |
| Type                                          | solid state relay            |
| Voltage                                       | 12 to 240 V <sub>AC/DC</sub> |
| Max. current                                  | 100 mA                       |
| Max. switching frequency (pulse length 20 ms) | 25 Hz                        |

|                      |                            |
|----------------------|----------------------------|
| Optical test outputs | active and reactive energy |
| Type                 | red LED                    |
| Number               | 2                          |
| Meter constant       | selectable                 |

|                                           |                         |
|-------------------------------------------|-------------------------|
| Relay contacts                            | on extension board 326x |
| Type                                      | relay                   |
| Voltage                                   | 240 V <sub>AC</sub>     |
| Max. current                              | 8 A                     |
| Max. operations with $\cos\varphi \sim 1$ | 100 000 op.             |

|                       |                                    |
|-----------------------|------------------------------------|
| Control inputs        | on extension board 326x            |
| Control voltage $U_S$ | 12 to 24 V <sub>DC</sub>           |
| Input current         | < 6 mA ohmic at 24 V <sub>DC</sub> |

## Communication interface

|                        |                                   |
|------------------------|-----------------------------------|
| Optical interface      | to IEC 62056-21                   |
| Type                   | serial, asynchronous, half-duplex |
| Max. transmission rate | 9600 bps                          |
| Protocols              | IEC 62056-21 and dlms             |

|                                                            |  |
|------------------------------------------------------------|--|
| Communication units                                        |  |
| Exchangeable communication units for various applications. |  |

## Additional power supply (optional)

|                         |                               |
|-------------------------|-------------------------------|
| On extension board 045x |                               |
| Nominal voltage range   | 100 to 240 V <sub>AC/DC</sub> |
| Tolerance               | 80 to 115% $U_n$              |
| Frequency               | 50 or 60 Hz                   |
| Max. power consumption  | 6.8 W                         |

|                                  |                          |
|----------------------------------|--------------------------|
| On extension board 046x and 326x |                          |
| Nominal voltage range            | 12 to 24 V <sub>DC</sub> |
| Tolerance                        | 80 to 115% $U_n$         |
| Max. power consumption 046x      | 3.5 W                    |
| Max. power consumption 326x      | 5.5 W                    |

|                         |                          |
|-------------------------|--------------------------|
| On extension board 047x |                          |
| Nominal voltage range   | 12 to 60 V <sub>DC</sub> |
| Tolerance               | 80 to 115% $U_n$         |
| Max. power consumption  | 5.0 W                    |

## Weight and dimensions

Weight approx. 1.5 kg

### External dimensions

|                                       |          |
|---------------------------------------|----------|
| Width                                 | 177 mm   |
| Height (with short terminal cover)    | 244 mm   |
| Height (with standard terminal cover) | 281.5 mm |
| Height (with extended hook)           | 305.5 mm |
| Depth                                 | 75 mm    |

### Suspension triangle

|                                    |        |
|------------------------------------|--------|
| Height (with extended hook)        | 230 mm |
| Height (suspension eyelet open)    | 206 mm |
| Height (suspension eyelet covered) | 190 mm |
| Width                              | 150 mm |

### Terminal cover

|                                |                   |
|--------------------------------|-------------------|
| Short                          | no free space     |
| Standard (opaque, transparent) | 40 mm free space  |
| Long (opaque, transparent)     | 60 mm free space  |
| GSM                            | 60 mm free space  |
| ZxB type 80 mm                 | 80 mm free space  |
| ZxB type 110 mm                | 110 mm free space |
| ADP2 adapter                   |                   |

## Material housing

Polycarbonate, partly glass-fibre reinforced

## Environmental

RoHS compliant design

## Connections


### Phase connections

|                                     |                        |
|-------------------------------------|------------------------|
| Type                                | screw type terminals   |
| Diameter                            | 5.2 mm                 |
| Recommended conductor cross section | 4 to 6 mm <sup>2</sup> |
| Screw head                          | Pozidrive Combi No. 2  |
| Screw dimensions                    | M4 x 8                 |
| Screw head diameter                 | ≤ 5.8 mm               |
| Tightening torque                   | < 1.7 Nm               |

### Other connections


|                                 |                                |
|---------------------------------|--------------------------------|
| Type                            | screwless spring-type terminal |
| Max. current of voltage outputs | 1 A                            |
| Max. voltage of inputs          | 250 V                          |

## Meter dimensions (standard terminal cover)

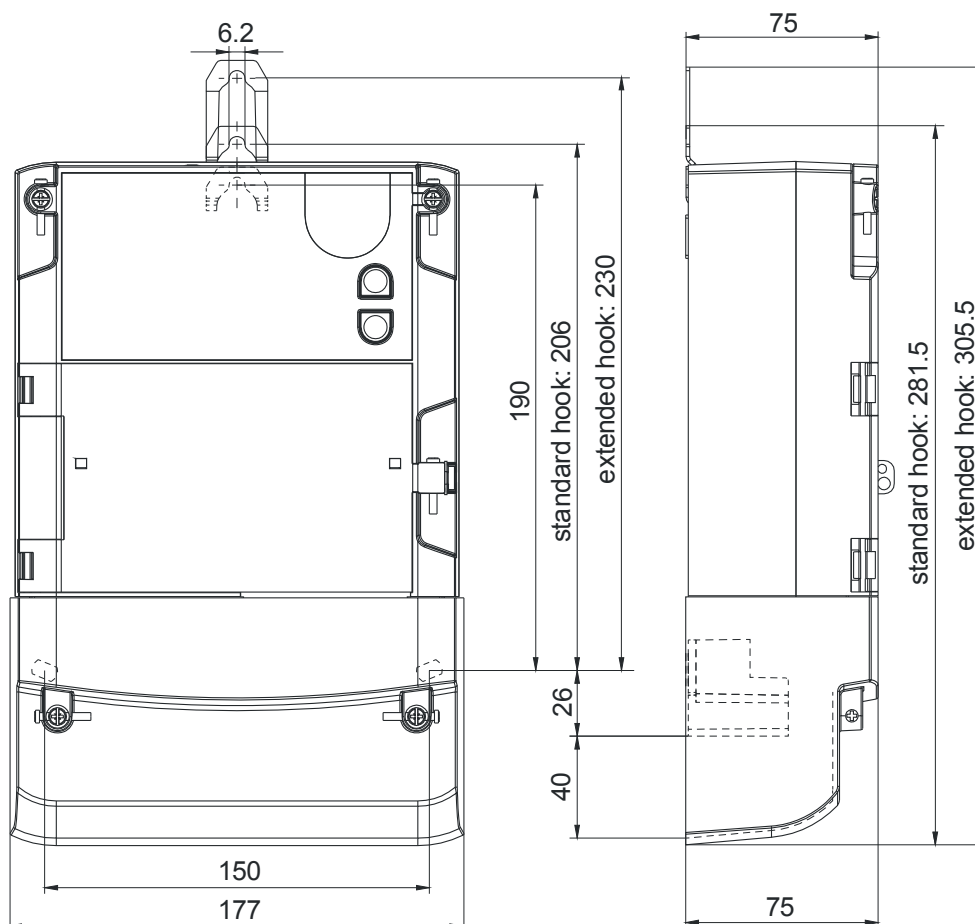





## Terminal dimensions

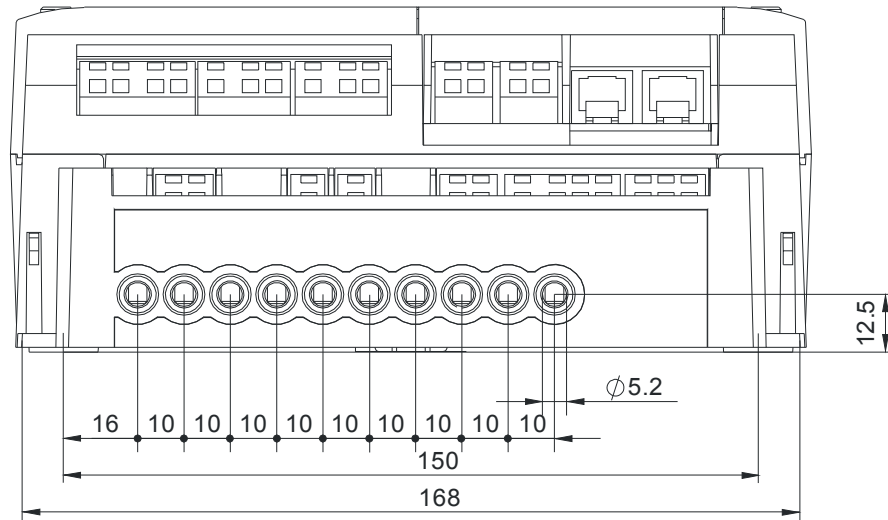

## Terminal layout according to DIN

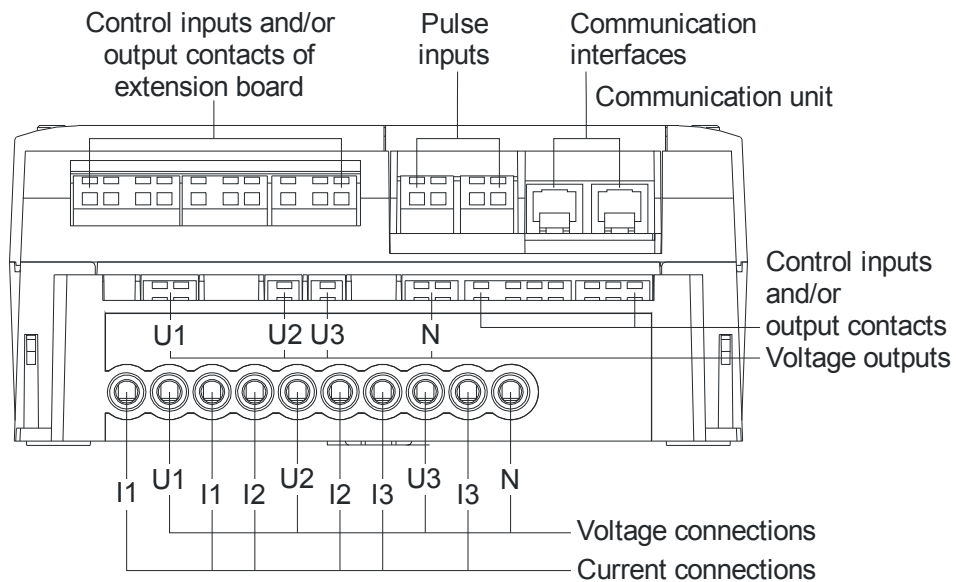

## Symmetrical terminal layout (optional, ZMD402 only)

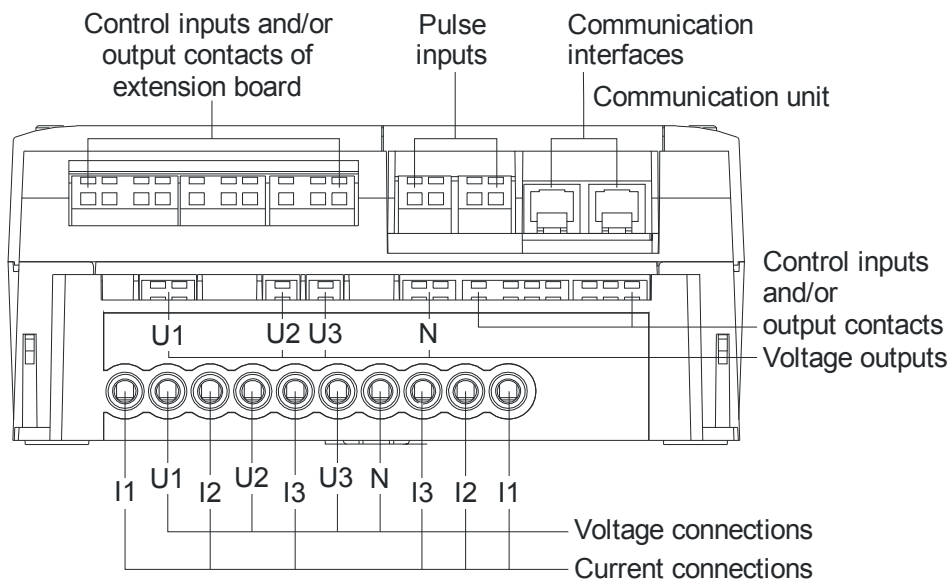

| Type designation            |                                                                                                                     | ZMD | 4 | 02 | C | T | 44 | 4207 | S3 |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------|-----|---|----|---|---|----|------|----|
| <b>Network type</b>         |                                                                                                                     |     |   |    |   |   |    |      |    |
| ZFD                         | 3-phase 3-wire network (F-circuit)                                                                                  |     |   |    |   |   |    |      |    |
| ZMD                         | 3-phase 4-wire network (M-circuit)                                                                                  |     |   |    |   |   |    |      |    |
| <b>Connection type</b>      |                                                                                                                     |     |   |    |   |   |    |      |    |
| 4                           | Transformer operated                                                                                                |     |   |    |   |   |    |      |    |
| <b>Accuracy class</b>       |                                                                                                                     |     |   |    |   |   |    |      |    |
| 02                          | Active energy class 0.2s (IEC)                                                                                      |     |   |    |   |   |    |      |    |
| <b>Measured quantities</b>  |                                                                                                                     |     |   |    |   |   |    |      |    |
| C                           | Active and reactive energy                                                                                          |     |   |    |   |   |    |      |    |
| A                           | Active energy                                                                                                       |     |   |    |   |   |    |      |    |
| <b>Construction</b>         |                                                                                                                     |     |   |    |   |   |    |      |    |
| T                           | With exchangeable communication units                                                                               |     |   |    |   |   |    |      |    |
| <b>Tariffication</b>        |                                                                                                                     |     |   |    |   |   |    |      |    |
| 21                          | Energy rates, external rate control via control inputs                                                              |     |   |    |   |   |    |      |    |
| 24                          | Energy rates, internal rate control via time switch<br>(additionally possible via control inputs)                   |     |   |    |   |   |    |      |    |
| 41                          | Energy and demand rates, external rate control via control inputs                                                   |     |   |    |   |   |    |      |    |
| 44                          | Energy and demand rates, internal rate control via time switch<br>(additionally possible via control inputs)        |     |   |    |   |   |    |      |    |
|                             | All versions with 3 control inputs and 2 output contacts                                                            |     |   |    |   |   |    |      |    |
| <b>Additional functions</b> |                                                                                                                     |     |   |    |   |   |    |      |    |
| 000x                        | No extension board                                                                                                  |     |   |    |   |   |    |      |    |
| 060x                        | 6 outputs                                                                                                           |     |   |    |   |   |    |      |    |
| 240x                        | 2 control inputs, 4 outputs                                                                                         |     |   |    |   |   |    |      |    |
| 420x                        | 4 control inputs, 2 outputs                                                                                         |     |   |    |   |   |    |      |    |
| 326x                        | 3 control inputs, 2 relays outputs, auxiliary power supply 12 to 24 V <sub>DC</sub>                                 |     |   |    |   |   |    |      |    |
| 045x                        | 4 outputs, auxiliary power supply 100 to 240 V <sub>AC</sub> /V <sub>DC</sub>                                       |     |   |    |   |   |    |      |    |
| 046x                        | 4 outputs, auxiliary power supply 12 to 24 V <sub>DC</sub>                                                          |     |   |    |   |   |    |      |    |
| 047x                        | 4 outputs, auxiliary power supply 12 to 60 V <sub>DC</sub>                                                          |     |   |    |   |   |    |      |    |
| xxx0                        | No additional functions                                                                                             |     |   |    |   |   |    |      |    |
| xxx2                        | DC-magnet detection                                                                                                 |     |   |    |   |   |    |      |    |
| xxx7                        | Load profile                                                                                                        |     |   |    |   |   |    |      |    |
| xxx9                        | DC-magnet detection and load profile (integrated terminal cover switch option only available in this configuration) |     |   |    |   |   |    |      |    |
| <b>Series 3</b>             |                                                                                                                     |     |   |    |   |   |    |      |    |



**Contact:**

Landis+Gyr AG  
Theilerstrasse 1  
CH-6301 Zug  
Switzerland  
Phone: +41 41 935 6000  
[www.landisgyr.com](http://www.landisgyr.com)

