
Field-Attachable Connectors

# BKS-S 32M-00
# Order Code: BCC00TT

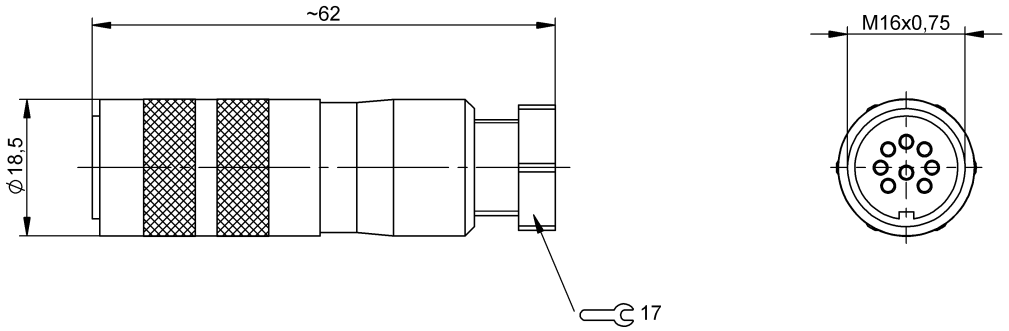


## Basic features

| | |
|---|---|
| Approval/Conformity | CE<br>WEEE |

## Electrical connection

| | |
|---|---|
| Cable diameter D | 6...8 mm |
| Connection | M16x0.75-Female, straight, 8-pin |
| Contact shield | Shield ring |
| Number of connectable contacts | 8 |
| System | Can be fabricated |

## Electrical data

| | |
|---|---|
| Operating voltage Ub | 60 VDC / 60 VAC |
| Rated current (40 °C) | 5.0 A |

## Environmental conditions

| | |
|---|---|
| Ambient temperature | -30...95 °C |
| IP rating | IP67 |

## Material

| | |
|---|---|
| Material contact carrier | PBT |
| Material contacts | Bronze |
| Material cover nut | Brass |
| Material grip | Die-cast zinc |

## Mechanical data

| | |
|---|---|
| Connection cross-section | 0.14...0.75 mm² |
| Type of wire mounting | Solder connections |

## Remarks

Enclosure rating per IEC 60529, only in screwed state with the associated mating piece.

## Connector Drawings

