


OX-B431 Oxidising Gas Sensor – Ozone + Nitrogen Dioxide – 4-Electrode

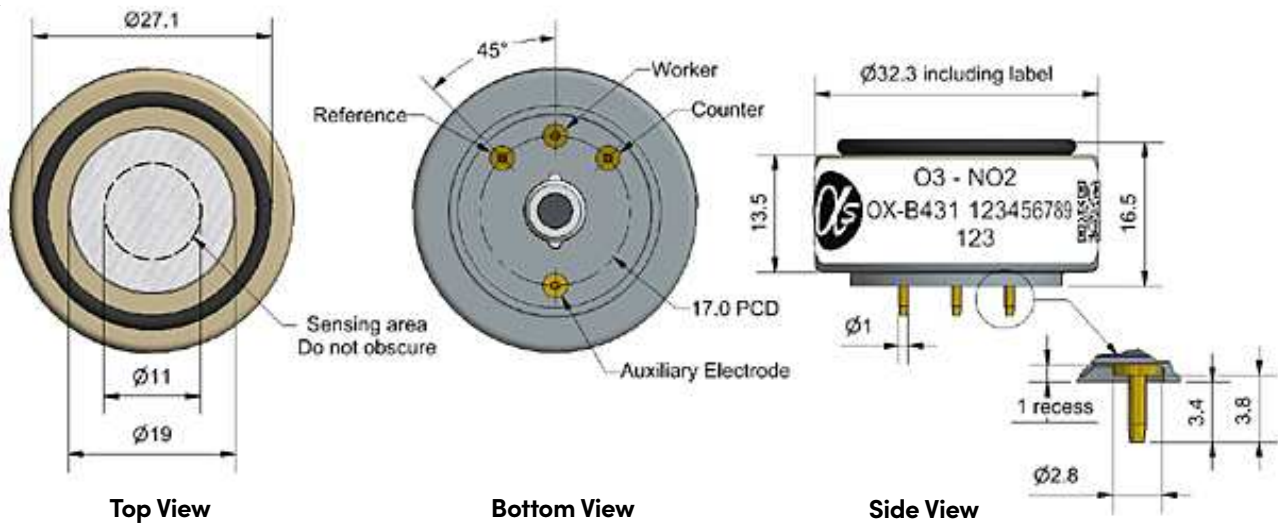

Dimensions are in millimetres (± 0.15 mm).

Specification O₃ Sensing

Performance	Sensitivity	nA/ppm at 1ppm O ₃	-225 to -750
	Response time	t ₉₀ (s) from zero to 1ppm O ₃	< 80
	Zero current	nA in zero air at 20°C	-80 to +80
	Noise*	± 2 standard deviations (ppb equivalent)	15
	Range	ppm O ₃ limit of performance warranty	20
	Linearity	ppm error at full scale, linear at zero and 20ppm O ₃	< ± 0.5
	Overgas limit	maximum ppm for stable response to gas pulse	50
	*Tested with Alphasense AFE low noise circuit		

Lifetime	Zero drift	ppb equivalent change/year in lab air	0 to 20
	Sensitivity drift	% change/year in lab air, monthly test	< -20 to -40
	Operating life	months until 50% original signal (24-month warranted)	> 24

Environmental	Sensitivity @ -20°C	% (output @ -20°C/output @ 20°C) @ 2ppm O ₃	70 to 90
	Sensitivity @ 40°C	% (output @ 40°C/output @ 20°C) @ 2ppm O ₃	95 to 125
	Zero @ -20°C	nA	0 to 25
	Zero @ 40°C	nA	5 to 100

Cross Sensitivity	H ₂ S	sensitivity	% measured gas @ 5ppm	H ₂ S	< -80
	NO	sensitivity	% measured gas @ 5ppm	NO	< 5
	Cl ₂	sensitivity	% measured gas @ 5ppm	Cl ₂	< 100
	SO ₂	sensitivity	% measured gas @ 5ppm	SO ₂	< -3
	CO	sensitivity	% measured gas @ 5ppm	CO	< -3
	C ₂ H ₄	sensitivity	% measured gas @ 100ppm	C ₂ H ₄	< 0.1
	NH ₃	sensitivity	% measured gas @ 20ppm	NH ₃	< 0.1
	H ₂	sensitivity	% measured gas @ 100ppm	H ₂	< 0.1
	CO ₂	sensitivity	% measured gas @ 5% volume	CO ₂	< 0.1
	Halothane	sensitivity	% measured gas @ 100ppm	Halothane	< 0.1

Key Specifications	Temperature range	°C	-30 to 40
	Pressure range	kPa	80 to 120
	Humidity range	% rh continuous	15 to 85
	Storage period	months @ 3 to 20°C (stored in sealed pot)	6
	Load resistor	Ω (AFE circuit is recommended)	33 to 100
	Weight	g	< 13

Figure 1 Sensitivity Temperature Dependence To 1ppm O₃

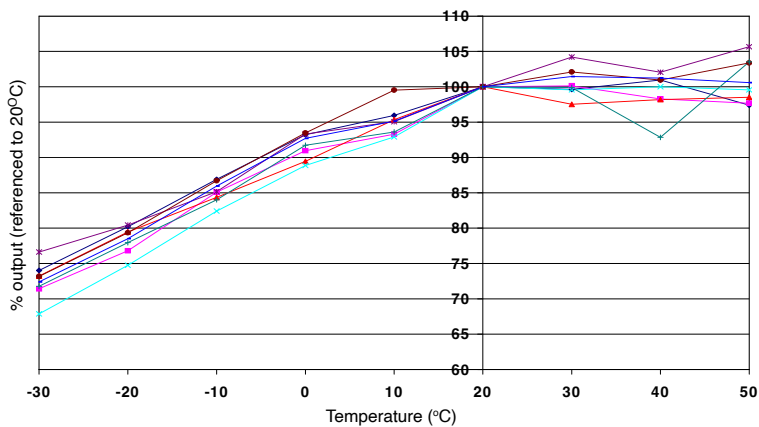


Figure 1 shows the temperature dependence of sensitivity at 1ppm O₃.

This data is taken from a typical batch of sensors.

Figure 2 Zero Temperature Dependence

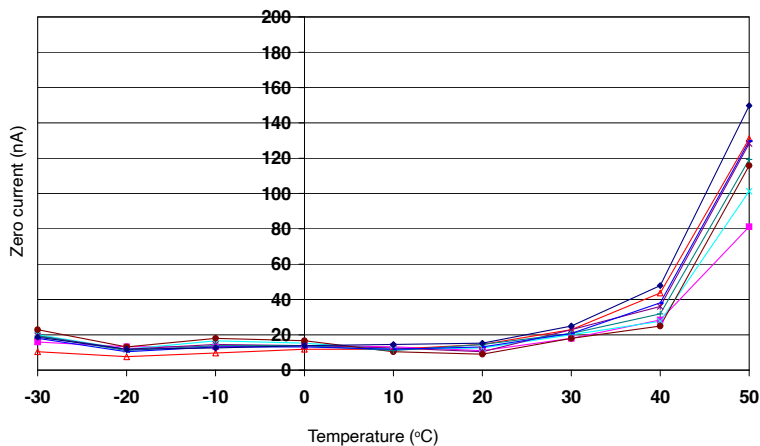


Figure 2 shows the variation in zero output of the working electrode caused by changes in temperature, expressed as nA.

This data is taken from a typical batch of sensors.

Contact Alphasense for further information on zero current correction.

Figure 3 Response from 200ppb to 0ppb O₃

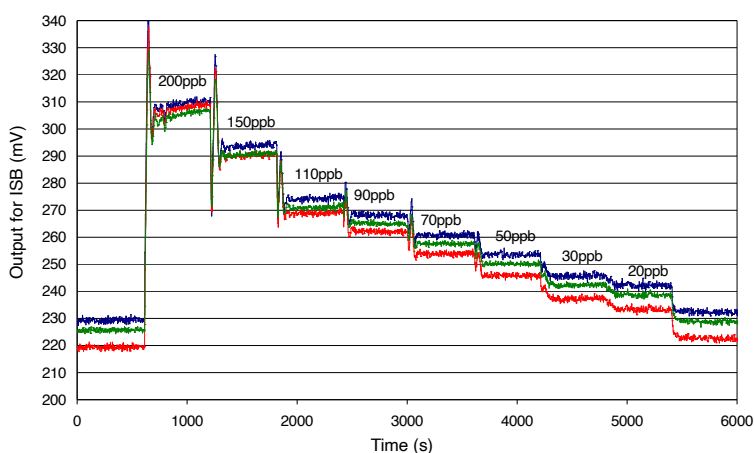


Figure 3 shows response from 200ppb O₃ to 0ppb O₃.

Use of Alphasense AFE circuit reduces noise to 15ppb, with the opportunity of digital smoothing to reduce noise even further.

Offset voltage is due to intentional ISB circuit electronic offset.

The OX-B431 detects both ozone and nitrogen dioxide ($O_3 + NO_2$). The NO2-B43F measures only nitrogen dioxide, filtering out ozone. Using these sensors together allows you to calculate the O_3 concentration by subtracting the corrected NO2-B43F concentration from the corrected OX-B431 concentration.

Before subtracting to determine ozone concentration, ensure that the signals from the two sensors have been corrected for electronic zero offset, sensor zero offset and temperature dependence, and sensitivity (nA/ppm) calibration and temperature dependence.

Specification NO₂ Sensing

Performance	Sensitivity to NO ₂	nA/ppm at 2ppm NO ₂	-250 to -750
	Response time	t90 (s) from zero to 2ppm NO ₂	< 80
	Zero current	nA in zero air at 20°C	-80 to +80
	Noise*	±2 standard deviations (ppb equivalent)	15
	Range	ppm NO ₂ limit of performance warranty	20
	Linearity	ppm error at full scale, linear at zero and 20ppm NO ₂	< ± 0.5
	Overgas limit	maximum ppm for stable response to gas pulse	50
	*Tested with Alphasense AFE low noise circuit		

Lifetime	Zero drift	ppb equivalent change/year in lab air	0 to 20
	Sensitivity drift	% change/year in lab air, monthly test	< -20 to -40
	Operating life	months until 50% original signal (24-month warranted)	> 24

Environmental	Sensitivity @ -20°C	% (output @ -20°C/output @ 20°C) @ 2ppm NO ₂	70 to 90
	Sensitivity @ 40°C	% (output @ 50°C/output @ 20°C) @ 2ppm NO ₂	95 to 110
	Zero @ -20°C	nA	0 to 25
	Zero @ 40°C	nA	5 to 50

Cross Sensitivity	H ₂ S	sensitivity	% measured gas @ 5ppm	H ₂ S	< -80
	NO	sensitivity	% measured gas @ 5ppm	NO	< 5
	Cl ₂	sensitivity	% measured gas @ 5ppm	Cl ₂	< 100
	SO ₂	sensitivity	% measured gas @ 5ppm	SO ₂	< -3
	CO	sensitivity	% measured gas @ 5ppm	CO	< -3
	C ₂ H ₄	sensitivity	% measured gas @ 100ppm	C ₂ H ₄	< 0.1
	NH ₃	sensitivity	% measured gas @ 20ppm	NH ₃	< 0.1
	H ₂	sensitivity	% measured gas @ 100ppm	H ₂	< 0.1
	CO ₂	sensitivity	% measured gas @ 5% volume	CO ₂	< 0.1
	Halothane	sensitivity	% measured gas @ 100ppm	Halothane	< 0.1

Key Specifications	Temperature range	°C	-30 to 40
	Pressure range	kPa	80 to 120
	Humidity range	% rh continuous	15 to 85
	Weight	g	

Figure 4 Sensitivity temperature dependence to 2ppm NO₂

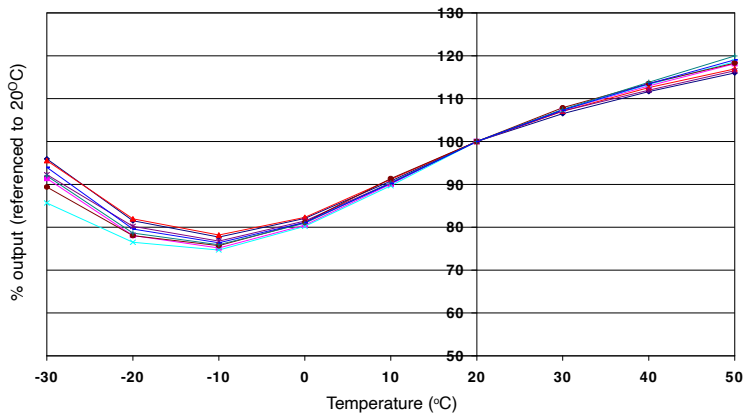


Figure 4 shows the temperature dependence of sensitivity at 2ppm NO₂.

This data is taken from a typical batch of sensors.

Figure 5 Response to 50ppb NO₂

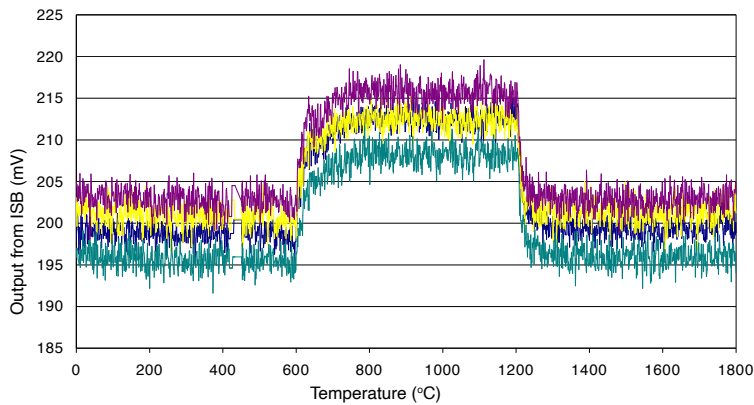


Figure 5 shows the fast response and good baseline recovery of the OX-B431 to 50ppb NO₂.

Figure 6 Response from 200ppb to 0ppb NO₂

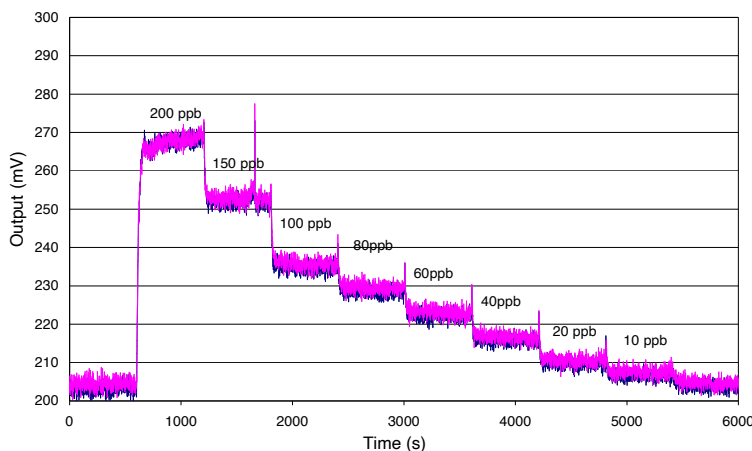


Figure 6 shows response from 200ppb NO₂ to 0ppb NO₂.

Use of Alphasense AFE circuit reduces noise to 15ppb, with the opportunity of digital smoothing to reduce noise to less than ± 5 ppb.

Offset voltage is due to intentional ISB circuit electronic offset.