



Fixed circuit breaker

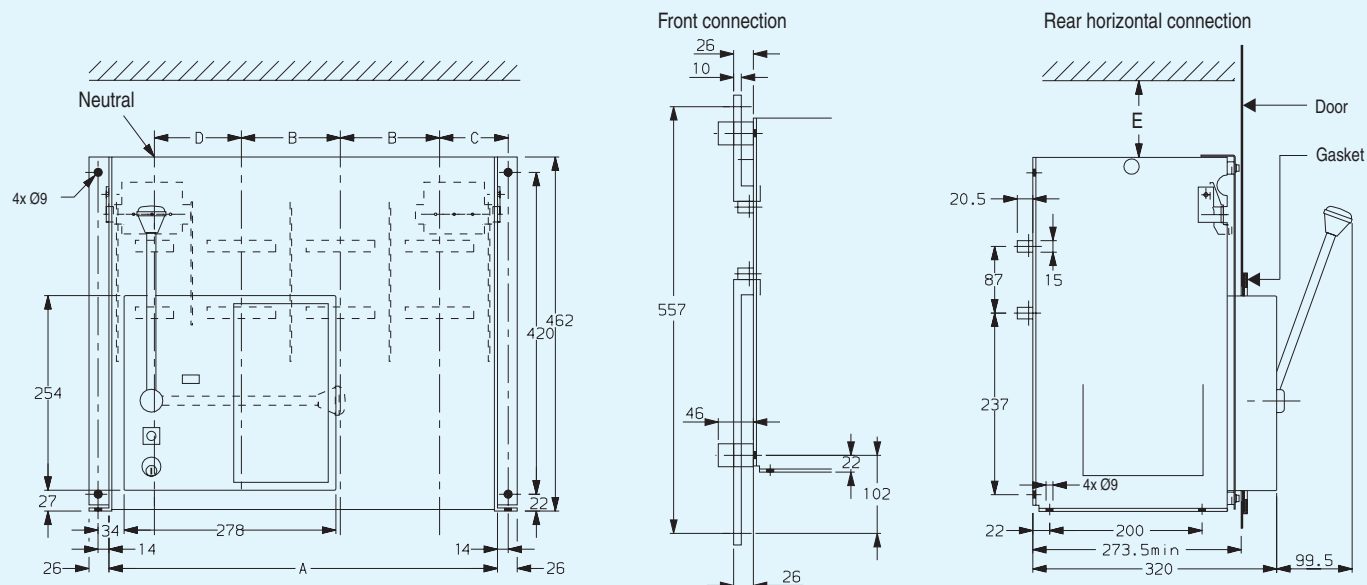

Panel cut out for fitting gasket

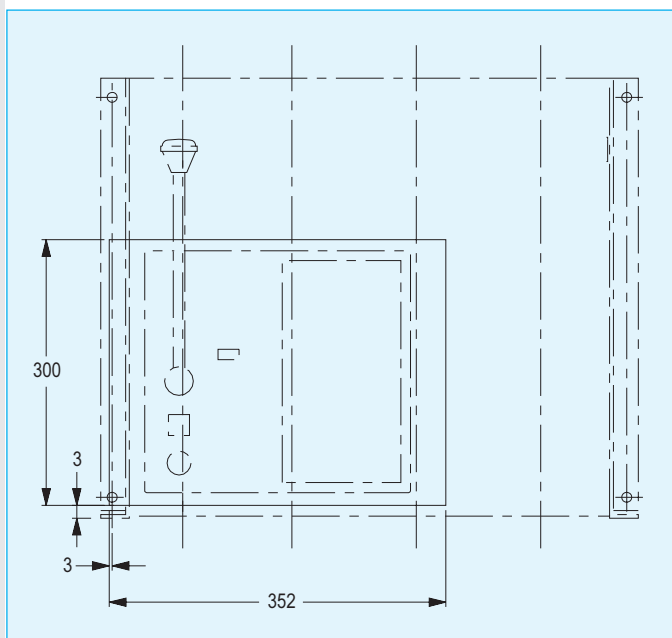


Legend

Type	Number of poles	A	B	C	D
SP 800 to 1600	3	318	98	75	-
	4	406	98	70	98
SP 2000-2500	3	412	130	90	-
	4	510	130	90	114


E = minimum clearance distance above the arc chutes.

	Ue ≤ 500V	Ue ≤ 690V
I = Insulating screen	150 mm	150 mm
M = Metallic screen	150 mm	200 mm


Rear horizontal connections

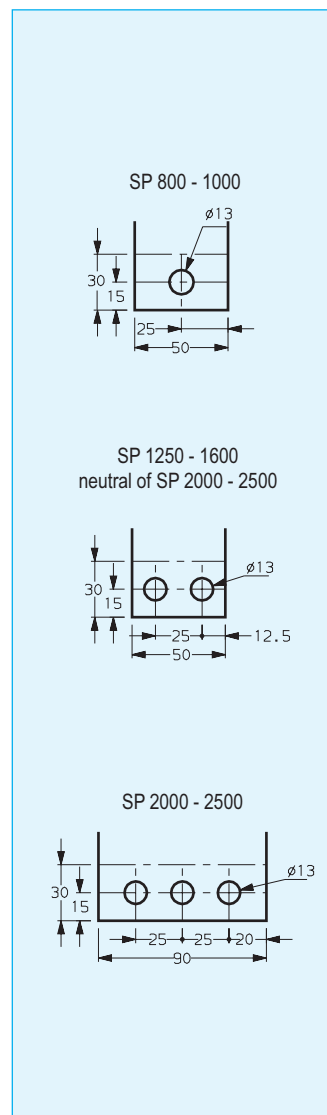


Front connections

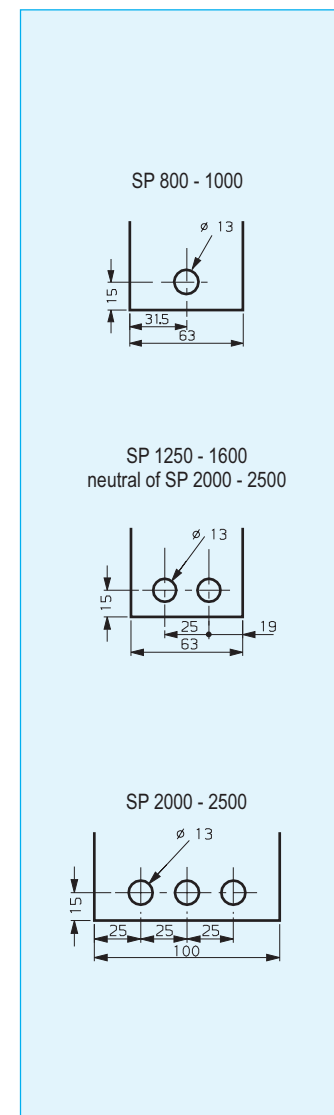


Withdrawable circuit breaker

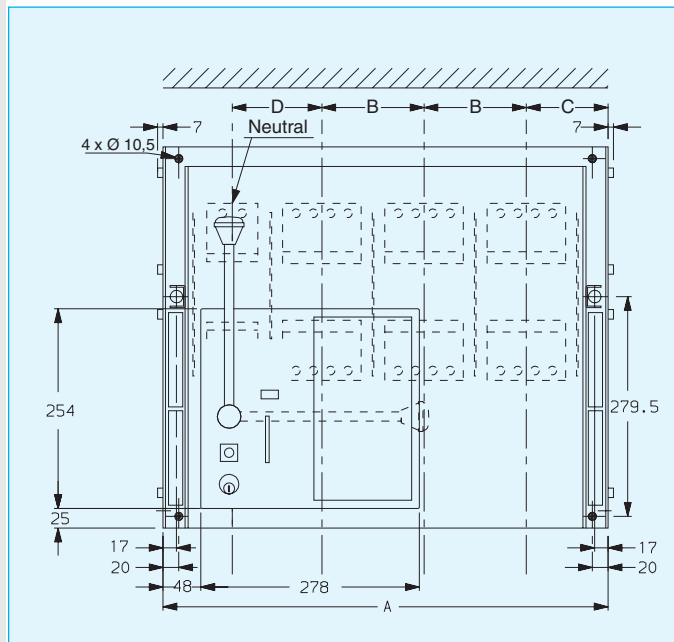


Front connection

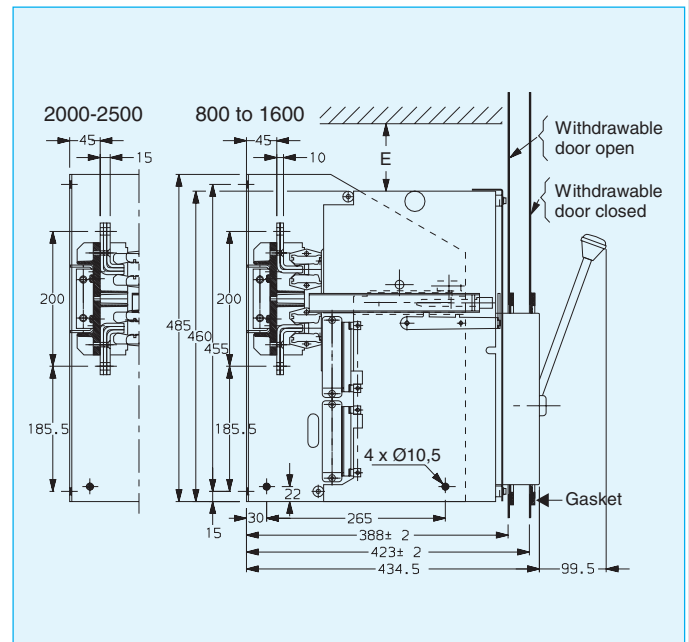

Panel cut out for gasket fitting

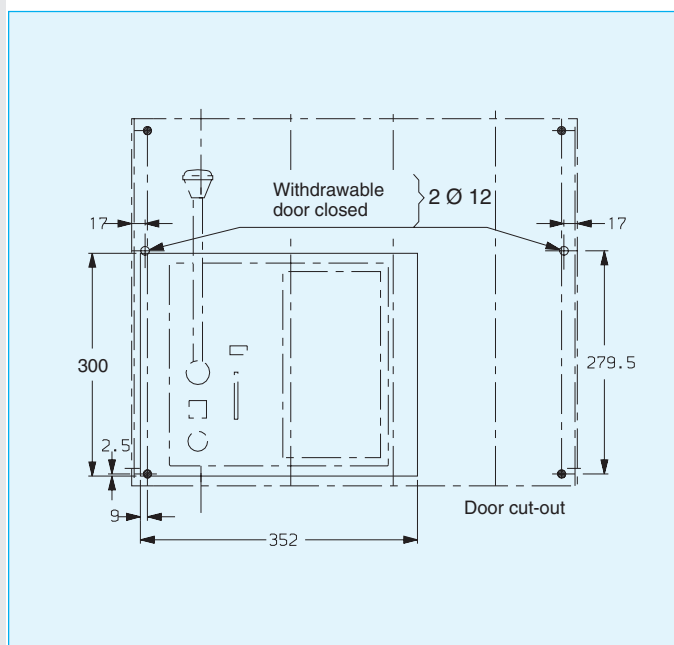

Rear horizontal connection

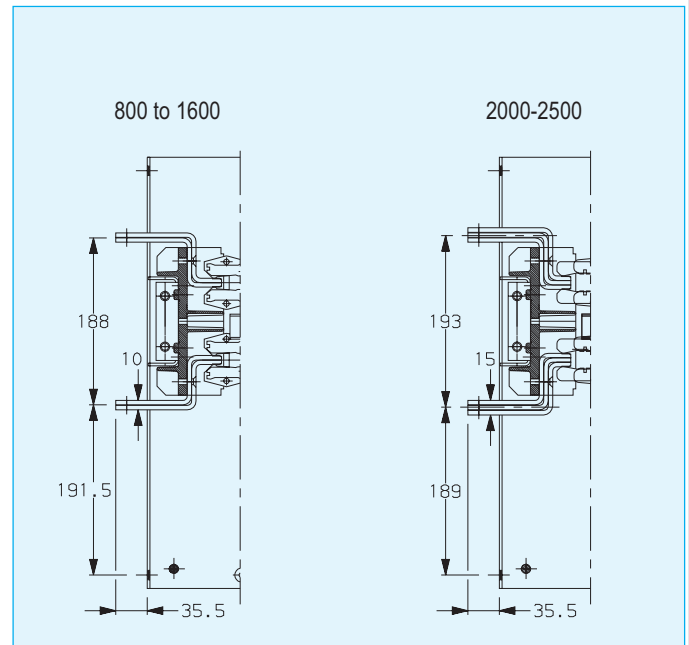

Legend

Type	Number of poles	A	B	C	D
SP 800 to 1600	3	374	98	89	-
	4	462	98	84	98
SP 2000-2500	3	468	130	104	-
	4	566	130	104	114

E = minimum clearance distance above the arc chutes.

	Ue ≤ 500V	Ue ≤ 690V
I = Insulating screen	100 mm	100 mm
M = Metallic screen	150 mm	200 mm

Connection terminals

