


CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

Dimen.	Fit
⌀19	c11 -0.110 -0.240 18.890 18.760

NOTES:
1. - LUBRICATE INDICATED O-RINGS WITH SILICONE BASED GREASE.
2. - TIGHTEN INDICATED BOLTS AND SECURE WITH LOCK NUT.
3 - WHEN ORDERING FROM DEUBLIN USE PART NUMBER: 2440-001-177-180

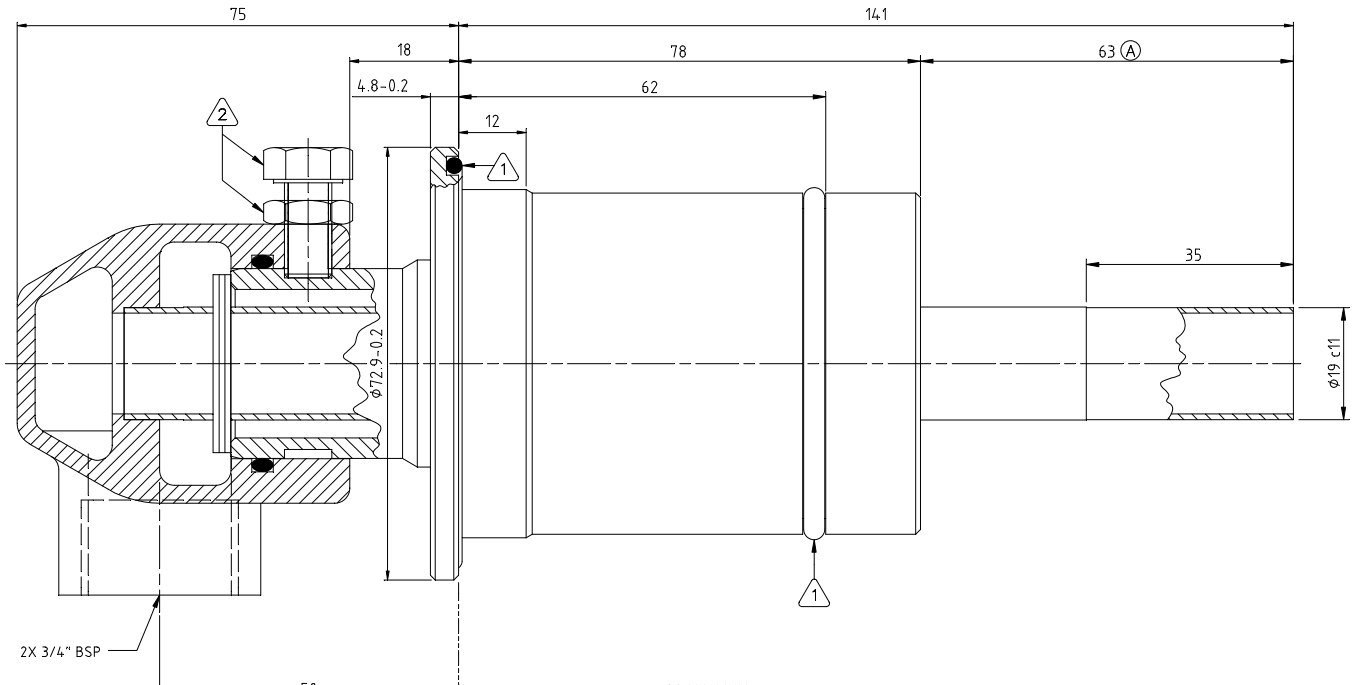

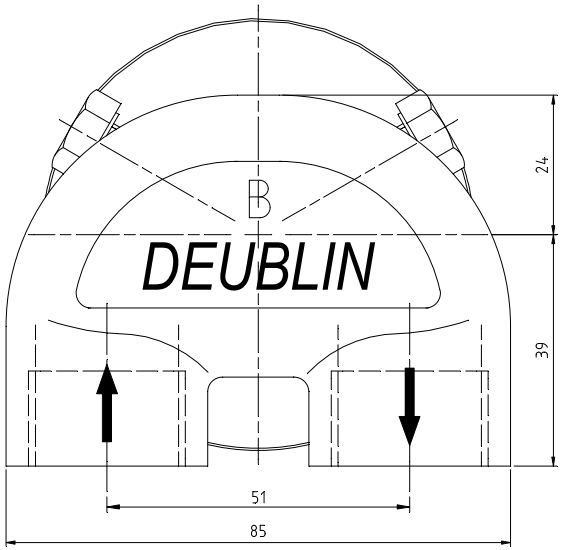

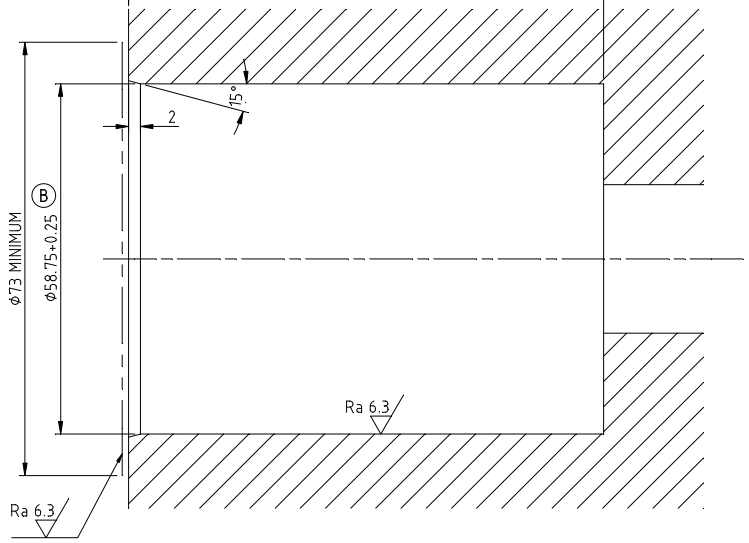

OPERATING PARAMETERS	
MEDIA	WATER
MAX. PRESSURE	10 bar
MAX. SPEED	100/min
MAX. TEMPERATURE	121°C
MAX. FLOW	53 L/min

DEUBLIN COMPANY
WAUKEGAN, ILLINOIS, U.S.A.

PROJECTION:

SCALE: 1.6667:1
MATERIAL:

	DATE	NAME
DRN.	07/12/05	RM
ENGR.	07/12/05	SF
APPD.		

TITLE: INTERFACE CONTROL DRAWING FOR UNION 2425-001-177-180

ISSUE	MODIFICATION	ECO	DATE	SIGN
C	REMOVED IMPERIAL DIMS	7585	08/06	MJ
B	WAS ⌀58.75-0.25	EGR	05/06	RM
A	WAS 529	6843	07/05	RM

UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE

NO. 2425-001-177-180-IC
SHEET A2