

LiFePO4 - 12V 12Ah

JB-LFP12-12NP-COMP

Dimension (with case)

Length	96mm
Width	66mm
Height	152mm
Weight	1,3kg



Electrical Specification

Nominal voltage	12V (12,8V)
Nominal capacity	12Ah
Energy	153.6Wh
Resistance	≤ 200mΩ
Self discharge	<3% / month
Efficiency	99%

Mechanical Specifications

Terminal type	Faston 6,3mm
Case material	ABS
Enclosure protection	IP65
Cell type	cylindrical

Charge Specifications

Recommend charge current	2-6A
Max. charge current	10A
BMS charge voltage cut-off	14,6V
Reconnect voltage	14,2 - 14,5V
Balancing current	20mA
Balancing voltage	3,5V

Discharge Specifications

max. cont discharge	10A
peak discharge current	5 sec. 20A
BMS discharge current	5 sec. 20A
recommend cut-off voltage	10-11V
BMS discharge cut-off	9,2V
short circuit protection	200-600 μs

Temperature Specifications

Discharge temperature	-20 to 60°C
Charge temperature	0 - 45°C
Storage temperature	-20 to 40°C
BMS high temperature	80°C
Reconnect temperature	50°C

Connection information

max. modules in series	2
max. modules parallel	4

Features & Benefits

* High cycle life:	>1000 times @ 80% DOD for effectively lower cost of ownership
* Built-in BMS Protection:	Battery Management System are incorporated to protect battery from over charging / over discharging / short circuit
* Light weight:	Dry power lithium batteries has higher energy density Wh/kg is 3 times than SLA battery
* Wide operating temp. range	Suitable for users in a wider range of application where ambient temperature is unusually high: up to +60°C





Suitable applications

* Lithium Iron Phosphate can be used in any application that would normally use Lead Acid, GEL or AGM type batteries.

* Lead acid or gel batteries can be easily replaced by LiFePO₄ batteries.
LiFePO₄ in 4S = 12.8 V and 8S = 25.6 V is close to lead-acid equivalents.

* Suitable applications included caravan, marine, golf carts, solar storage, remote monitoring, switching applications

Performance characteristics

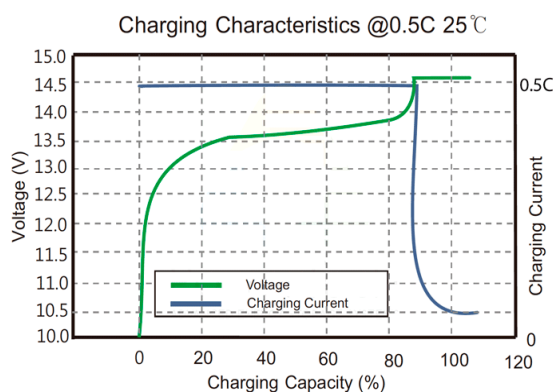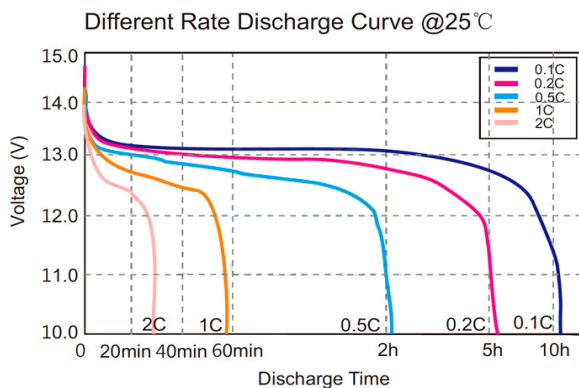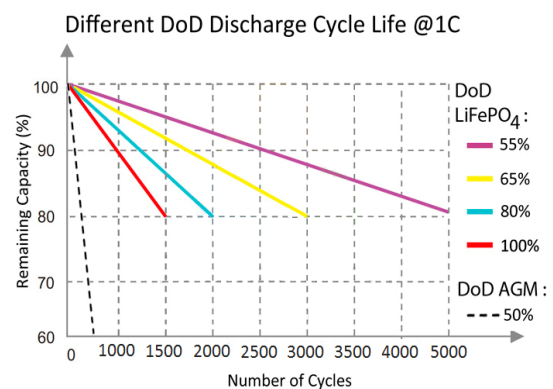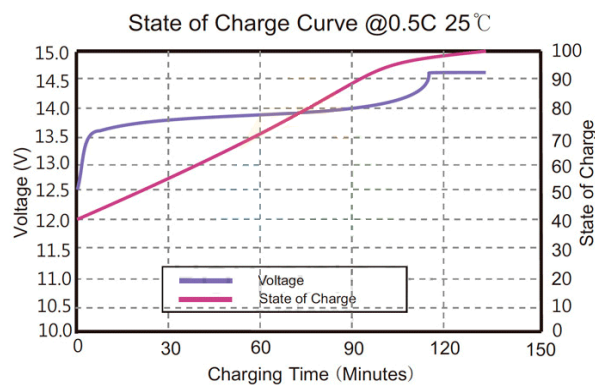

Cautions

Do NOT expose the battery to water
Do NOT expose the battery to fire & high temperature
Do NOT short circuit, crush or disassemble
Only use LiFePO₄ charger
Store at 50% capacity, recharge every 3 months.
The storage area should be clean, cool, dry and ventilated

Just Battery Technology UG (hb) - Siemensstr. 45 - 48619 Heek - Germany

Phone: +49 2568 9338884 - info@jubatec.eu - <https://www.jubatec.eu>