

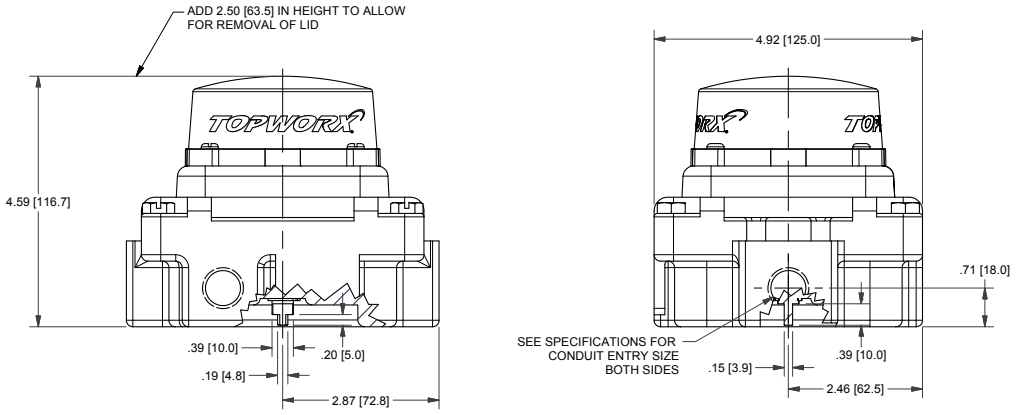


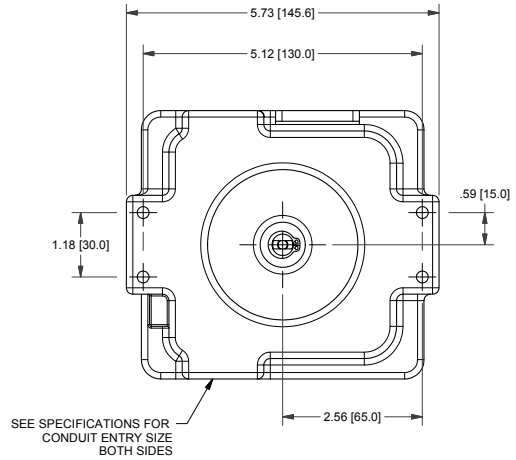

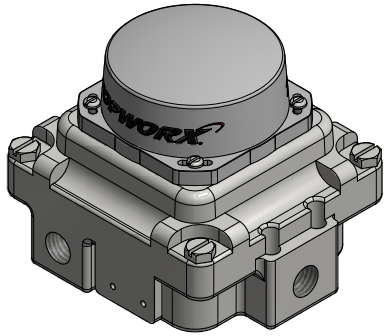


NAMEPLATE

Ex ia IIC T4 Gb; -60°C ≤ Ta ≤ 56°C
Ex tb IIIC T75°C Db; -50°C ≤ Ta ≤ 56°C; IP66/67
Sira 14ATEX2122X IECEx SIR 14.0045X
Reference Certificate for Entity Parameters

TopWorx
3300 Fern Valley Road
Louisville, KY 40213 USA
www.topworx.com

Model #:
Serial #:



MODEL NUMBER

TXP-E20GNMM


PRODUCT LINE

Switchbox TXP and TXS

SPECIFICATIONS

Enclosure	Tropicalized Aluminum
Bus/Sensor	(2) p+f NJ2+V3-N inductive NAMUR
Area Classification	Intrinsically safe
Visual Display	Standard 90° Green OPEN, Red CLOSED
Shaft	NAMUR
Conduit Entries	(2) M20
O-Rings	Silicone
Pilot	No pilot option
Spool Valve	No spool valve option
Valve Cv	No valve Cv option
Manual Override	No manual override option
Regional Certification	No regional cert option
N Switch	No N Switch

WIRING DIAGRAM

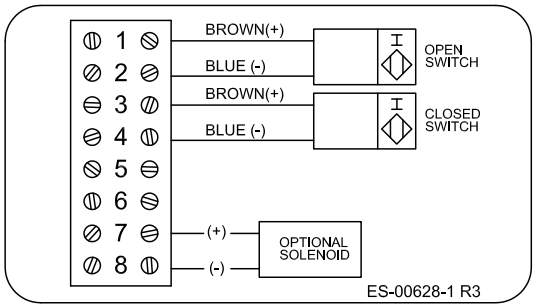

Current as of April 2, 2019 – Subject to change without notice.

TOPWORX
3300 Fern Valley Road
Louisville, KY 40213
(502)969-8000 PH
(502)969-5911 FAX
www.topworx.com