MTL4541/S – MTL5541/S REPEATER POWER SUPPLY

4/20mA, HART®, 2- or 3-wire transmitters

The MTLx541 provides a fully-floating dc supply for energising a conventional 2- or 3-wire 4/20mA transmitter, which is located in a hazardous area, and repeats the current in another floating circuit to drive a safe-area load. For HART 2-wire transmitters, the unit allows bi-directional communications signals superimposed on the 4/20mA loop current. Alternatively, the MTLx541S acts as a current sink for a safe-area connection rather than driving a current into the load. Separately powered current sources, such as 4-wire transmitters, can be connected but will not support HART communication.

SPECIFICATION

See also common specification

Number of channels
One

Location of transmitter
Zone 0, IIC, T4–6 hazardous area if suitably certified
Div. 1, Group A hazardous location

Safe-area output

Signal range:	4 to 20mA
Under/over-range:	0 to 24mA
Safe-area load resistance (MTLx541)	
@ 24mA:	0 to 360Ω
@ 20mA:	0 to 450Ω
Safe-area load (MTLx541S)	
Current sink:	600Ω max.
Maximum voltage source:	24V dc
Safe-area circuit output resistance:	> 1MΩ

Safe-area circuit ripple
< 50µA peak-to-peak

Hazardous-area input

Signal range:	0 to 24mA (including over-range)
Transmitter voltage:	16.5V at 20mA

Transfer accuracy at 20°C
Better than 15µA

Temperature drift
< 0.8µA/°C

Response time
Settles to within 10% of final value within 50µs

Communications supported
HART (terminals 1 & 2 only)

MTL4541 / MTL4541S

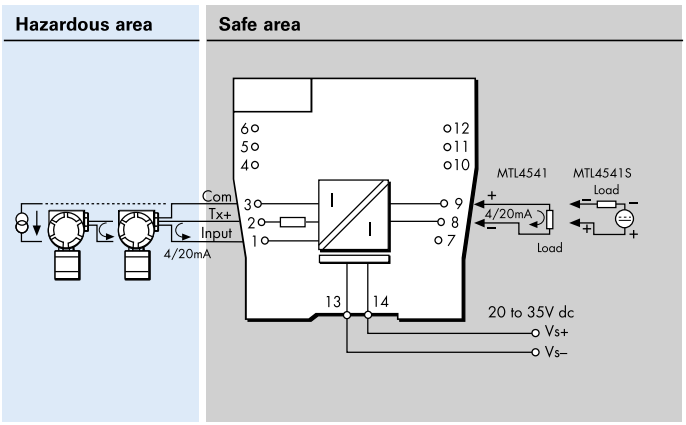

MTL5541 / MTL5541S

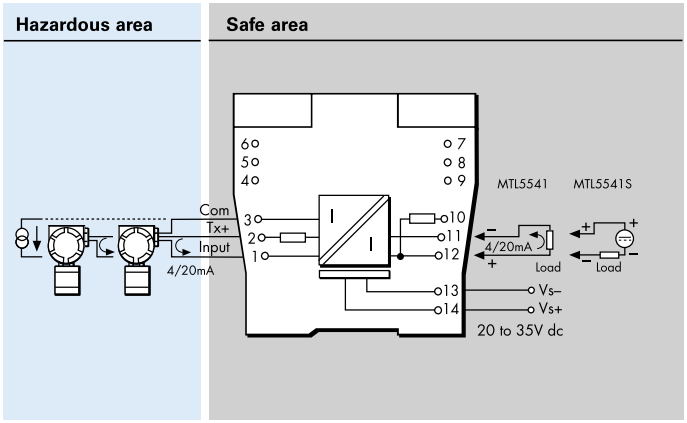

LED indicator
Green: power indication

Maximum current consumption (with 20mA signal)
51mA at 24V

Power dissipation within unit (with 20mA signal)

MTLx541	0.7W @ 24V dc
MTLx541S	1.0W @ 24V dc

Safety description
Terminals 2 to 1 and 3:
U_o=28V I_o=93mA P_o=0.65W U_m = 253V rms or dc
Terminals 1 to 3:
Simple apparatus ≤1.5V, ≤0.1A and ≤25mW; can be connected without further certification into any IS loop with an open-circuit voltage <28V

SIL capable
These models have been assessed for use in IEC 61508 functional safety applications.
SIL3 capable for a single device (HFT=0)
See data on MTL web site and refer to the safety manual.

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee.
In the interest of further technical developments, we reserve the right to make design changes.

Powering Business Worldwide

Eaton Electric Limited,
Great Marlings, Butterfield, Luton
Beds, LU2 8DL, UK.
Tel: + 44 (0)1582 723633 Fax: + 44 (0)1582 422283
E-mail: mtlenquiry@eaton.com
www.eaton.com

© 2024 Eaton
All Rights Reserved

Publication No.
EPSx541/S Rev8 230524

EUROPE (EMEA):
+44 (0)1582 723633 mtlenquiry@eaton.com
THE AMERICAS:
+1 800 835 7075 mtl-us-info@eaton.com
ASIA-PACIFIC:
+65 6 645 9888 sales.mtlsing@eaton.com