Palazzoli

ALARM WATERTIGHT SIREN WITH VIBRATING DIAPHRAGM FOR EXTENDED OPERATION IN ALUMINIUM ALLOY ENCLOSURE 230V IP66

SERIES ALARM SIREN

CODE 900473

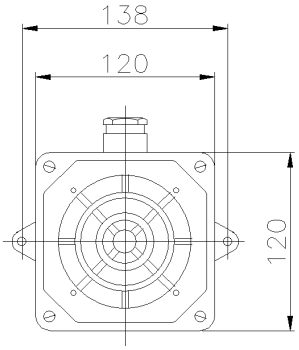

CE UKCA

Datasheet

Specifications

Net Weight	1.24 KG
Rated current	0,14A
Frequency	50/60Hz
IP Protection degree	IP66
Poles	2P+ ⏚
Rated operating voltage	230V
Manufacturing material	Aluminum alloy
power	33,4 VA
Hole type	M20
Sound level at 1 mt.	107/105dB dB
Acustic Signal Type	D - continuous sound according to manual control
Operational working temp	-40 T 40 °C

Reference Standards and Directives

Certification and approval marks	CE, UKCA
Directives	2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/30/EU (EMC), 2014/35/EU (LVD)
Reference Standards	EN 62080:2009 , EN IEC 63000:2018

The images are purely indicative. Palazzoli reserves the right to make changes without notice.

Palazzoli S.p.A. - Società unipersonale - Via F. Palazzoli, 31 - 25128 Brescia - Italy - tel. +39 030 2015.1 - fax +39 030 2015.258 - www.palazzoli.com - export@palazzoli.it