
FILTERMIST S SERIES

OIL MIST FILTER

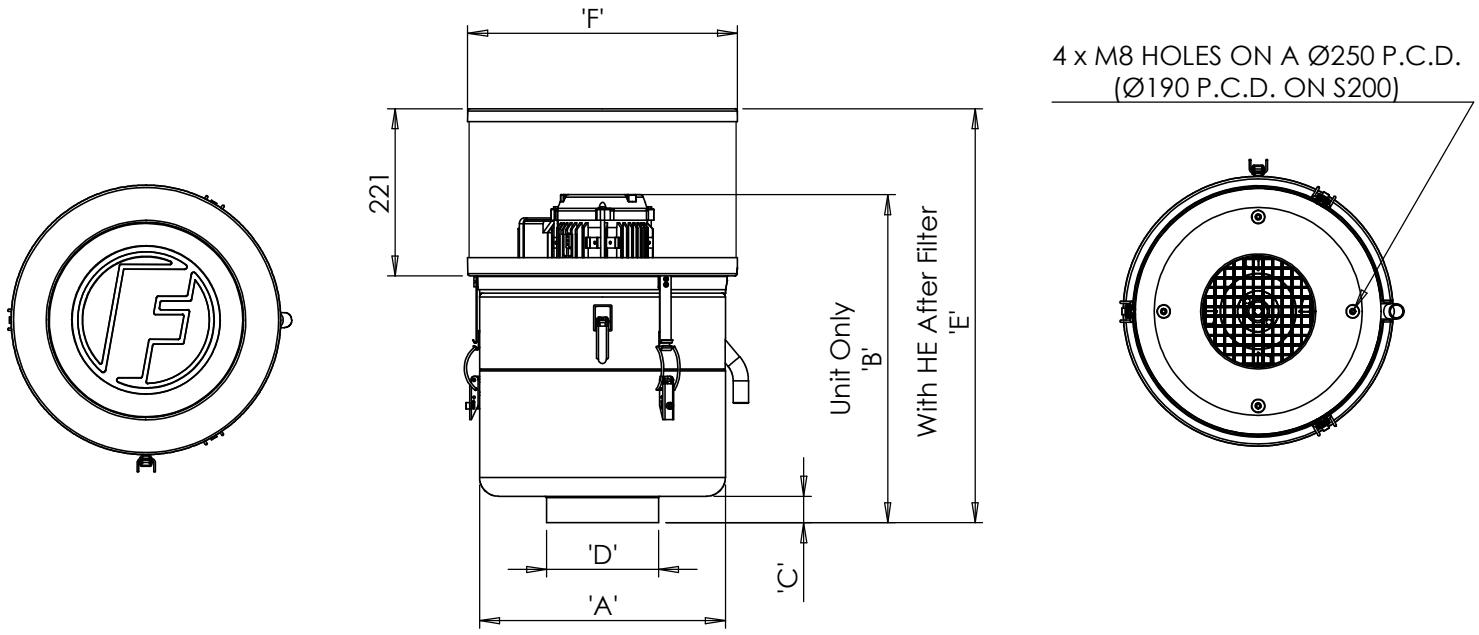


Model	Airflow M3/HR	Motor		'A' mm	'B' mm	'C' mm	'D' mm	'E' mm	'F' mm	Weight KG	Noise dBA
S200	180 @ 50Hz 215 @ 60Hz	0.18kW 50Hz 200v, 220v, 380v, 400v	0.18kW 60Hz 200v, 220v, 230v, 440v, 460v, 480v, 575v*	260	302	30	73	423.5	324	11.85	62
S400	425 @ 50Hz 500 @ 60Hz	0.55kW 50Hz 200v, 220v, 380v, 400v	0.55kW 60Hz 200v, 220v, 230v, 440v, 460v, 480v, 575v*	325	374	35	148	494.5	357	16.85	65
S800	800 @ 50Hz 950 @ 60Hz	0.55kW 50Hz 200v, 220v, 380v, 400v	0.55kW 60Hz 200v, 220v, 230v, 440v, 460v, 480v, 575v*	325	427	35	148	543.5	357	17.85	67

September 2024

1. Motors to be used on specified voltages only
2. Results are in test conditions ±3% tolerance, Local variations and in use conditions may affect readings.
3. A 575v motor is a non-standard unit, but is available upon request.

FILTERMIST FX SERIES

OIL MIST FILTER

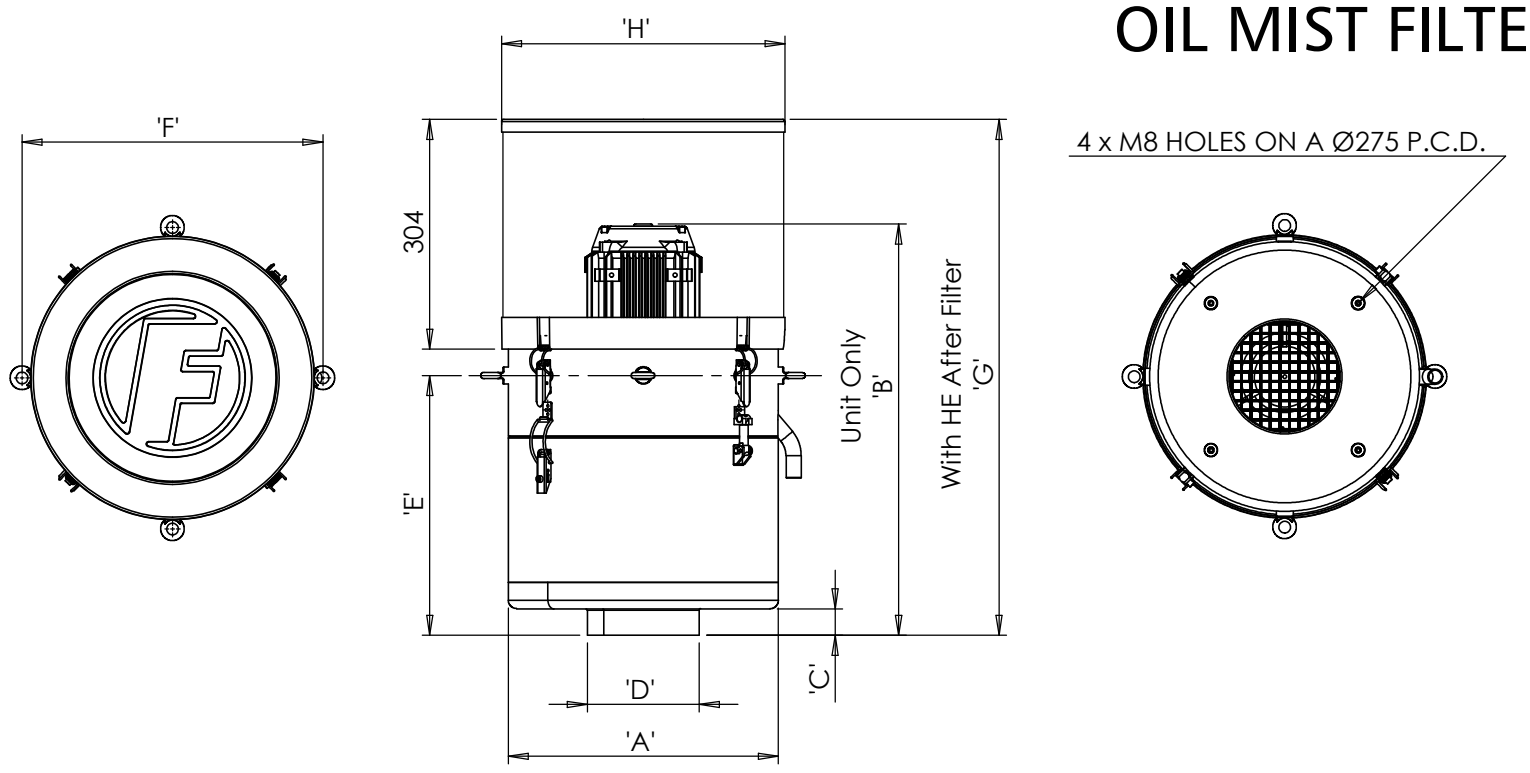

Model	Airflow M3/HR	Motor		'A' mm	'B' mm	'C' mm	'D' mm	'E' mm	'F' mm	'G' mm	'H' mm	Weight KG	Noise dBA
FX4002	1250 @ 50Hz 1500 @ 60Hz	1.1kW 50Hz 200v, 220v, 380v, 400v	1.1kW 60Hz 200v, 220v, 230v, 440v, 460v, 480v, 575v*	357	532	35	148	309	398	682.5	375	28.8	73
FX5002	1675 @ 50Hz 2000 @ 60Hz	1.5kW 50Hz 200v, 220v, 380v, 400v	1.5kW 60Hz 200v, 220v, 230v, 440v, 460v, 480v, 575v*	357	613	35	198	378	398	375	35.3	35.3	73
FX6002	2000 @ 50Hz 2400 @ 60Hz	2.2kW 50Hz 200v, 220v, 380v, 400v	2.2kW 60Hz 200v, 220v, 230v, 440v, 460v, 480v, 575v*	438	642	35	198	432	485	456	41.4	41.4	73
FX7002	2750 @ 50Hz	2.2kW 50Hz 200v, 220v, 380v, 400v	Not Available	438	642	35	198	432	485	456	41.4	41.4	73

September 2024

1. Motors to be used on specified voltages only
2. Results are in test conditions ±3% tolerance, Local variations and in use conditions may affect readings.
3. A 575v motor is a non-standard unit, but is available upon request.