

グリース 拾脂量 Grease volume	8.21 kg (9.12 ㇿ)
---------------------------	-----------------------

無記号表面ヲサ
SURFACES MARKED
EXCEPT AS NOTED



$$7. \quad \nabla - \nabla \quad 25.5 \quad \nabla \nabla - \nabla \nabla \quad 63.5$$

機械加工	1	4	16	63	250	1000	2000
工機	?	?	?	?	?	?	?
等公差	4	16	63	250	1000	2000	5000
GENERAL							
TOLERANCE	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.5	± 2.0

ゾーン	REV
	1

№	DESCRIPTION	DATE	NAME
	MATERIAL SPEC. WAS S-SC & SCHWAB50T	MAY 13, 2006	G. SWELLING H. SCHWAB

11035540-2001044-01009 140

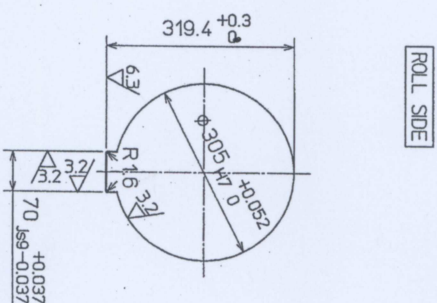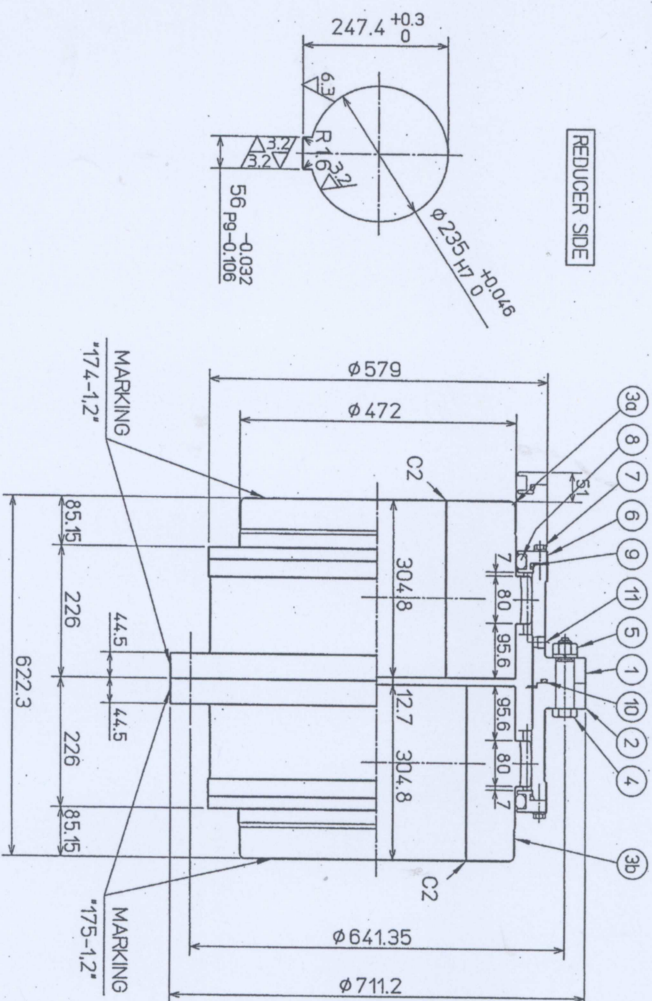

FINAL DRAWINGS



仕様		SPECIFICATION	
伝達動力 POWER	AC 1050 kW		
回転数 SPEED	164 min ⁻¹		
常用トルク NORMAL TORQUE	N-M 7037 Kg-m)		
最大トルク MAX TORQUE	N-M 14074 Kg-m)		

CUSTOMER	WORK NAME	ORDER No.	REQ. No.	MARKS Q'TY	ITEM No.	ITEM NAME	APPLICATION	WT (kg)
DOFASCO CANADA	PL 新装+ TCM 連結化	7103554032	R00104	174 2s 175 2s	2232110	No.10 BRIDLE #3,4 ROLL	* REDUCER SIDE * ROLL SIDE	489 417

ITEM-25 ASS'Y DWG. 04287110-013

[illegible]