RESISTRON ROPEX

ユサキ・オートメーション合同会社
ご担当者様

Measurement cable UML-1 (GB)

Datasheet

〒351-0022 埼玉県朝霞市東弁財1-6-26・2F
愛電株式会社 首都圏西営業所
TEL・048-468-1800 FAX・048-468-1790

UML-1 10m 1本見つもりお願いします

営業 28.11.-9 池田

A important condition of the resistance measurement in 4-wire-technique (principals of the functionality) for RESISTRON-/CIRUS-temperature controllers is the correct and precise voltage measurement at the ends of the heatsealing band.


We want to support our clients in this case. We can offer a twisted measurement cable for the U_R-voltage measurement now. ROPEX developed this new cable for heatsealing applications with RESISTRON-/CIRUS-temperature controllers.

Specification

- 2 x 1.0mm²
- Diameter app. 6.3mm
- Twisted 50turns/m
- Trailing cable
- Halogene and silicone free
- Halogene, silicone and latex free
- Bending radius 50mm min.
- Temperature range -25...+70°C
- Lead marking "1" und "2"

With this specifications the measurement cable UML-1 meets the requirements of modern high-technique machines.



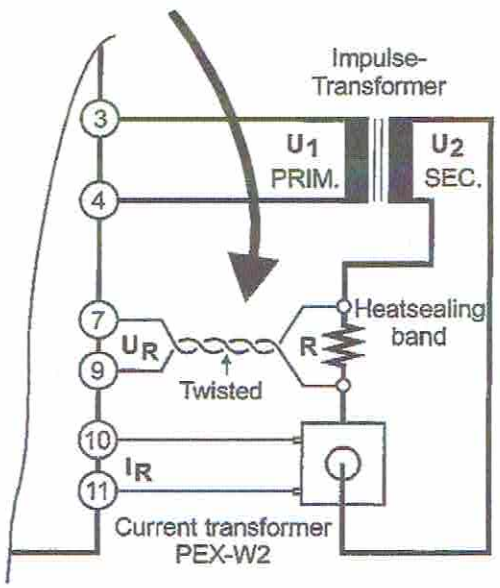

How to order



UML-1	Ring à 10m	Art. No. 884251	1本
	Ring à 100m	Art. No. 884252	
	Drum à 500m	Art. No. 884253	

14.10.04

ROPEX Industrie-Elektronik GmbH
Gansäcker 21
D-74321-Bietigheim-Bissingen (Germany)
Tel: +49/(0)7142/7776-0
Fax: +49/(0)7142/7776-19
E-Mail: info@ropex.de
Internet: www.ropex.de
Data subject to change