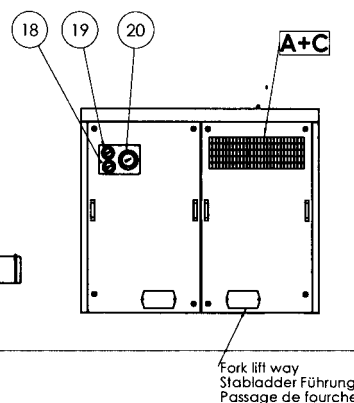


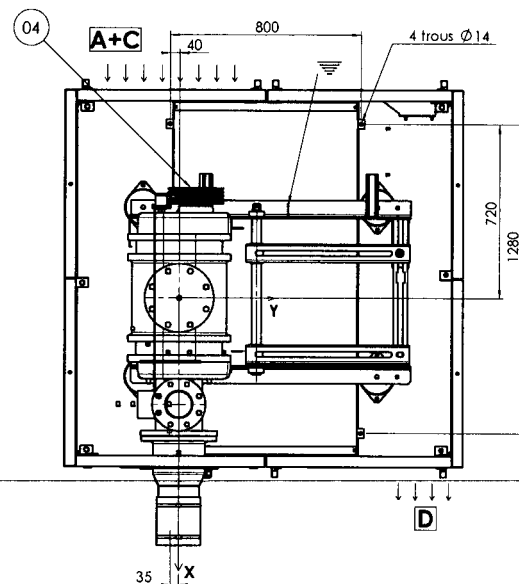
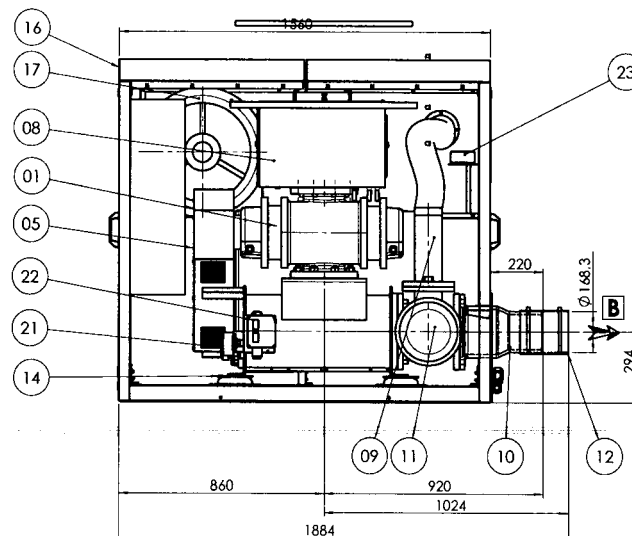
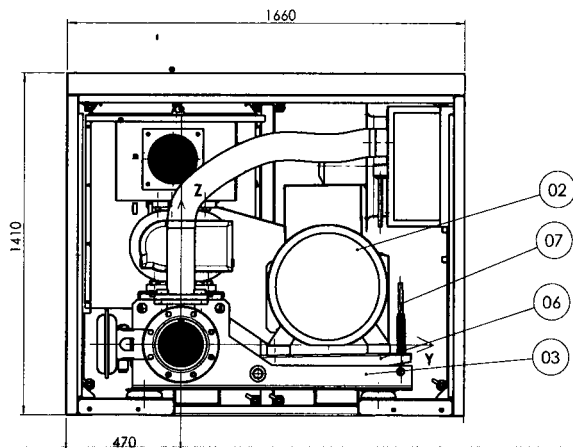


GRAVITY CENTER
SCHWER PUNKT
CENTRE DE GRAVITE

Gx : 2,5
Gy : 377
Gz : 302
(with motor max)

DYNAMIC COEFFICIENT
DYNAMISCHER KOEFFIZIENT
COEFFICIENT DYNAMIQUE : 1,3

TOTAL WEIGHT
GESAMTGEWICHT
MASSE TOTALE : 1620 kg
(with motor max)

TOLERANCE
TOLERANZ
TOLERANCE : ± 5 mm/m

PRESSURE RUNNING
DRUCKBETRIEB
FONCTIONNEMENT EN PRESSION

ASPIRATION
INLET
SAUG LUFT GITTER

REFOULEMENT
OUTLET
DRUCKSEITE

ENTREE D'AIR
AIR INLET
LUFT GITTER

SORTIE D'AIR
AIR OUTLET
LUFT DRUCKSEITE

39/11
REV
Etabli par/Drawn by
FDM

IR Ingersoll Rand
IR Air solutions (France)
2 av Jean-Paul Sartre - 92290 Wissiguel - FRANCE

Ech./Scale : 1/1

Réf./item :
FORMAT
A2




hicon SILENT FLOW
NX 12 ENCLOSED BLOWER PACKAGE
GROUPE SURPRESSEUR NX 12 CAPOTE

IERE EMISSION - FIRST ISSUE
MODIFICATIONS
J DE MEYER
VER APP

NUMERO DE PLAN / DRAWING NUMBER
SF 2_12 SPC

ANNEXE
REV.

Item	Qty	Description	Remarks	Wt. (kg)
23	1	Ambiente temperature switch Umgebungs thermostat Thermostat ambiance	Option	
22	1	Discharge temperature switch Thermostat air refoulement	Option	
21	1	Discharge pressure switch Pressostat air refoulement	Option	
20	1	Temperature gauge Indicateur temperature refoulement	Option	
19	1	Pressure gauge Druckanzeiger Indicateur de pression		
18	1	Fouling indicator Verschmutzungsanzeiger Indicateur de colmatage filtre		
17	1	Air fan Belufter Ventilateur		12
16	1	Acoustic enclosure Schallschutzhaube Capot d'insonorisation		260
15	4	Anchor bolt Ankerschrauben Boulons de scellement Ø12x130		0,8
14	4	Antivibratory support Elastischer Maschinenfuss Support elastique APK150		1,6
13	1	Flexible connecting pipe Manchette Manchette souple	Option DN 150 PN10	10
12	1	Flexible connecting pipe Manchette Manchette souple	in dia 168,3	0,8
11	1	Unloading valve Anfahrventil Soupape de démarrage EVA30S	Option	7,8
10	1	No return valve Rückschlagklappe Clapet anti-retour NRV150		10
09	1	Relief valve Sicherheitsventil Soupape de sécurité NP100	DN 100 PN10	12
08	1	Filter ducted silencer - cartridge C1501S Saugfilter - Patrone C1501S Filtre silencieux canalisé - Carouche C1501S	DN 150 PN10	50
07	1	Tensioning device Spannschraube Tendeur		2
06	1	Motor arms Motorstütze Support moteur		21
05	1	Drive guard Remoerschutz Carter de transmission		15
04	1	V-belt drive Remmentrieb Transmission		20
03	1	Silencer base frame Schalldämpfergrundrahmen Socle silencieux		125
02	1	Motor Moteur Moteur maxi IEC 280M 90kW		802
01	1	Blower Gebläse Surpresseur NX 12	DN 150 PN 10	255

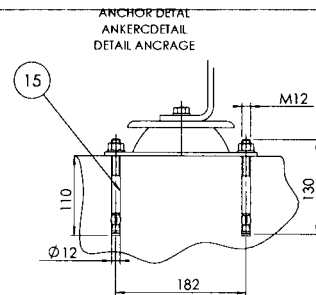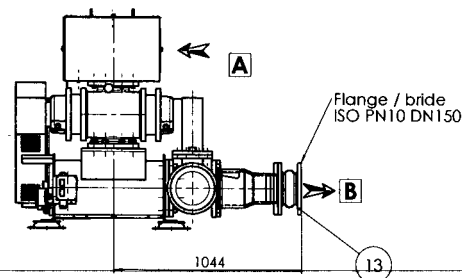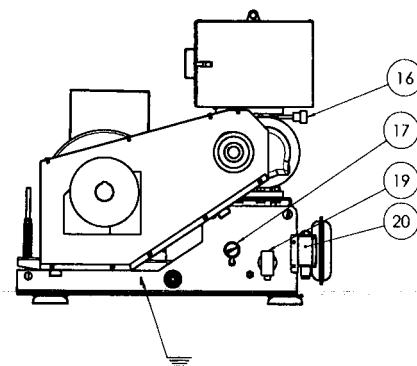

PRESSURE RUNNING
DRUCKBETRIEB
FONCTIONNEMENT EN PRESSION

[illegible]

		.../...	A							
ASPIRATION INLET SAUG LUFT GITTER		A	39/11		JB.LIAGRE		1ERE EMISSION - FIRST ISSUE		J DE MEYERE	
			SEM/WEEK	REV.	Etabli par/Drawn by		FDM	MODIFICATIONS	VER	APP
REFOULEMENT OUTLET DRUCKSEITE		B	 Ingersoll Rand IR Air solutions (France) 2 av Jean-Paul Sartre - 92000 Nanterre - FRANCE				 SILENT FLOW NX 12 BLOWER PACKAGE GROUPE SURPRESSEUR NX 12			
					Ech./Scale : ./.					
			Réf./Item :							
			FORMAT A2		NUMERO DE PLAN / DRAWING NUMBER SF 2_12 SP				ANNEXE	REV.