Z. Hd. Frau Panorka

AURORA
Advanced HVAC Solutions

Blowers DRG 1200 12V & 24V

AURORA's Twin Radial Blower DRG 1200 is perfect for heating, AC, and ventilation. Its powerful electric motor has high efficiency and a long lifetime of performance. AURORA Twin Radial Blowers contain a high air flow vs. system resistance proportion. Blower speeds are regulated via a series resistor with ceramic heat sink and micro-temperature-fusing.

Specifications
Housing: 35% glass fiber polyamide PA6 Airflow: 1200 m³/h (736 cfm) Nominal voltage: 12 or 24 Volt Weight: ~2,54 kg (6 lbs.)
Technical Data
912-100-0578

Variations

Part Number	Description
131-601-0400	12V - Standard
131-601-0101	12V - 1 Speed
131-601-0402	12V - 2 Speed
131-601-0403	12V - 3 Speed
131-602-0400	24V - Standard
131-602-0101	24V - 1 Speed
131-602 0146	24V - EGS
131-602-0402	24V - 2 Speed
131-602-0403	24V - 3 Speed
131-602-0450	24V - 4 Speed

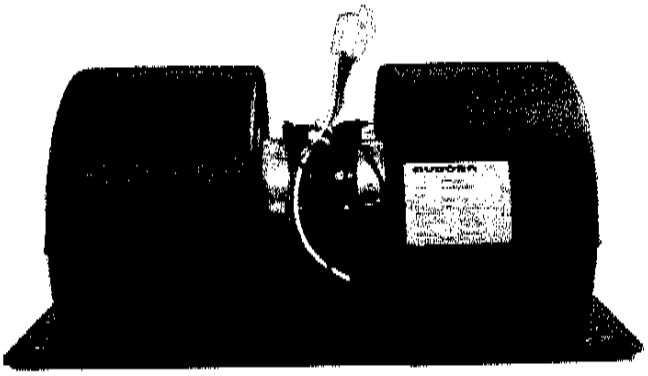

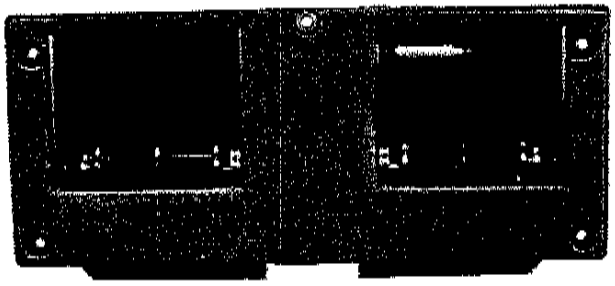

Technical Drawing and Information

	Speed 1	Speed 2	Speed 3	Speed 4
Vair in m³/h	470	675	800	1250
Vair in cfm	277	397	471	736
Pel in W	70	109	150	307
Lp in dB(A)	56	63	68	77

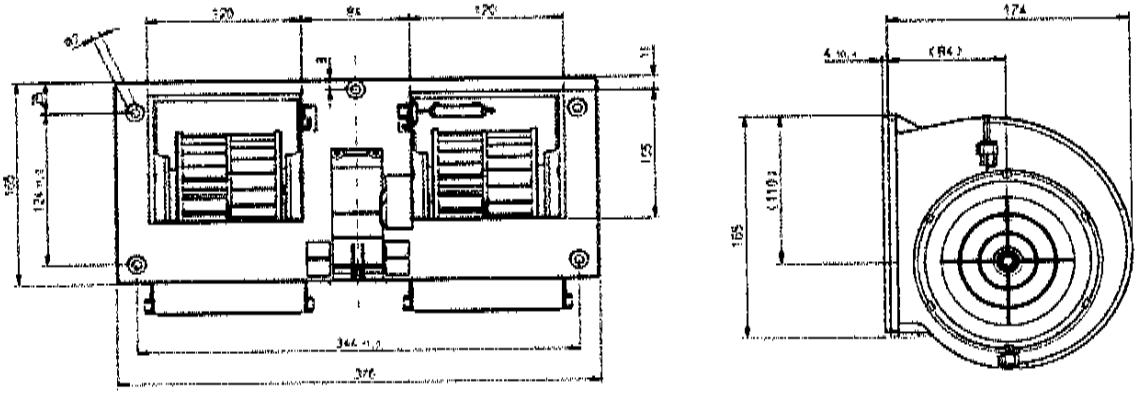

All designs and drawings are property of the Aurora Group. For more information please contact our sales team or visit our website at www.Aurora-eos.com

Bichlmaier KG
83435 Bad Reichenhall
Teisendorfer Str. 5
Tel. : 08651-76209-0
Fax. 08651-76209-60
e-Mail: Bichlmaier@t-online.de
BOSCH Service