


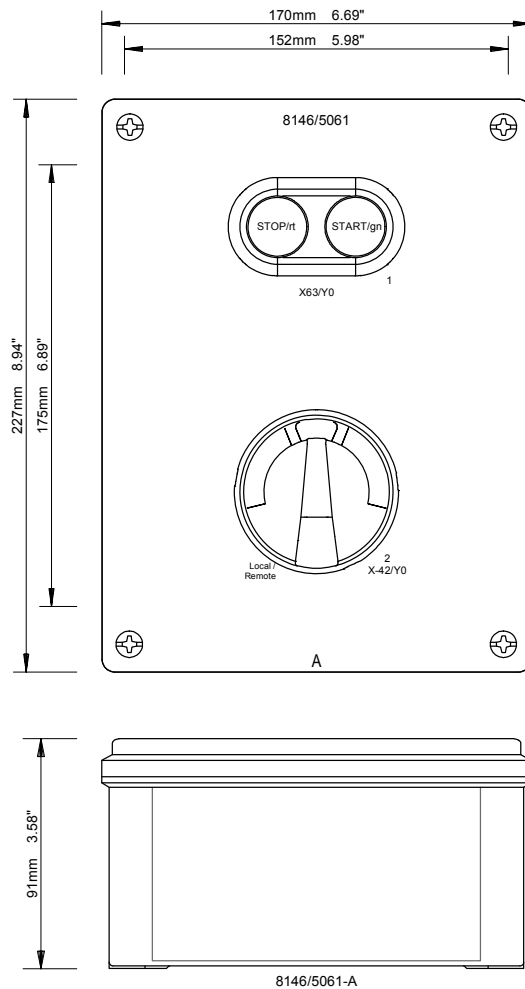

Control box Type 8146/5061

Explosion protection (gas): Ex II 2 G Ex db eb IIC T6 Gb

Explosion protection (dust): Ex II 2 D Ex tb IIIC T80°C Db

IECEX Certificate: IECEx PTB 06.0090

ATEX Certificate: PTB 01 ATEX 1024

Degree of protection: IP66

Ambient temperature: -20 °C +40 °C

Enclosure material: Polyester resin glass fibre-reinforced

Rated voltage [Un]: 230 V

Rated current [In]: 6 A

Rated frequency [Fn]: 50/60 Hz

Connection cross-section: 2,5 mm²

Material Type Labels: adhesive label

Wiring: Without wiring

Notes: Fitting position: side A bottom

Equipped with:

- 1 pc(s) rotary actuator bk-bk 64mm 45° not lockable A3, label 8602/3 Ø58 gravierbar, labelling: Local / Remote
- 1 pc(s) control switch 2-pole switch. options 016
- 1 pc(s) double pushbutton (horizontal) A3, Label: STOP/rt START/gn
- 1 pc(s) contact element NC+NO
- 1 pc(s) earth terminal USLKG 5