Wave





Technical characteristics

› Wave is available in two versions: built-in (height 60 or 45cm) or free-standing.
› Wave comes with a disposable CO_2 bottle (standard) and is designed for using external rechargeable bottles.
› Inside Wave there is a disposable CO_2 bottle which must be periodically changed. Carbon dioxide consumption depends on the degree of sparkle used for the water.

Technical data

Compressor power	65 W
Voltage	230V - 50/60Hz
Cold and sparkling water production	16,5 l/h Δt=10°C (temp. 25°C, humidity 75%)
Adjustable sparkle system	min. - max 3,5 ÷ 6 bar
Adjustable cold water temperature	4, 6, 8°C
Water input pressure	1,5 ÷ 6 bar
Max absorbed power	340 W
Refrigerant gas	R134a
Disposable CO_2 bottle capacity	gr. 600
Purifying filter duration	Lt 2.700 / 1 year
Net weight of built-in/free-standing machine	kg 38 / kg 23

Standard accessories: 1 class 1 NSF certified filter / 1 x 600 g. disposable CO_2 bottle / 1 tumbler stand / 8 mm food-grade tube for water connection with 3/8" M connector.

Fitting precautions

The appliance comes with a power lead (length 1.20 m) with Schuko plug. A power supply and water inlet are required for fitting. A polyethylene food-grade tube is provided, with 3/8" M connector. For the built-in version on tall units, fit the pull-out runners on the internal side panels of the cabinet. It is essential to leave at least 50 mm clearance at the back of the cabinet and for the entire height of the tall unit. Fit the appliance away from heat sources, ovens or other appliances that produce heat or require circulation of large amounts of air. Pull the appliance out of its seat for periodical maintenance. The purifying filter and CO_2 bottle must be checked regularly. The filter inside the appliance lasts 2700 litres or 1 year. The filter must always be in good condition for the appliance to work properly. When the filter is finished water is no longer dispensed. This is preceded by a beep at 2000 litres warning that the filter must be changed. Inside Wave there is a disposable CO_2 bottle that must be replaced periodically. Carbon dioxide consumption depends on the degree of sparkle used for the water. On request is possible to have an arrangement to use an external 4-kg rechargeable CO_2 cylinder, complete with connecting hose.

Wave 45 built-in



L min. 560 mm
P min. 560 mm
H min. 420 mm





Wave 60 built-in



L min. 560 mm
P min. 560 mm
H min. 560 mm





Wave free-standing

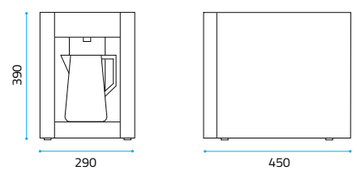

Tall unit for free-standing Wave

