





Print: "CBH : UL"

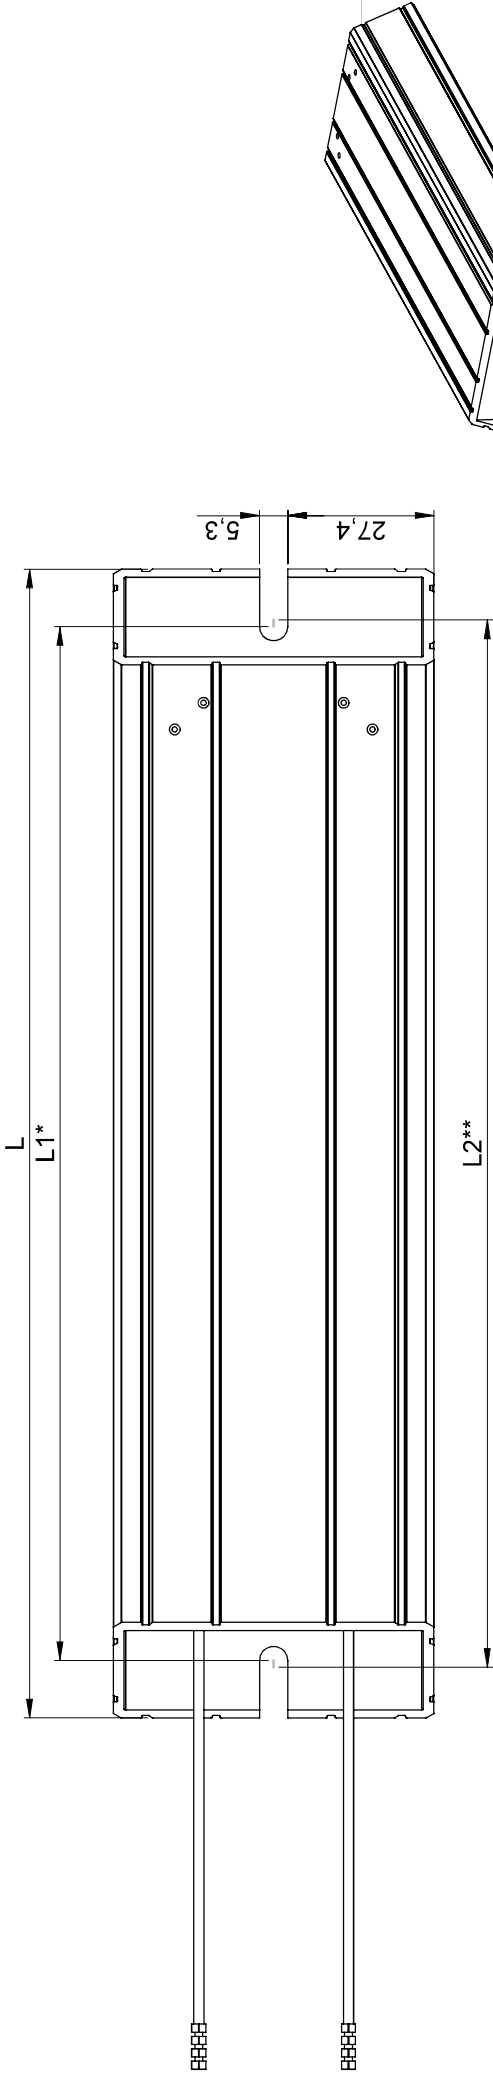

Variant / Type	xxR	YY%	L ± 2	L1 ± 2 *	L2 ± 2 **	Weight [g]
CBH 165 CH 414 5R0 KT	5	10	165	143,5	146	390
CBH 215 CH 414 4R0 KT	4	10	215	193,5	196	630
CBH 215 CH 414 5R0 JT	5	5	215	193,5	196	630
CBH 265 CH 414 5R0 KT	5	10	265	243,5	246	880
CBH 335 CH 414 5R0 KT	5	10	335	313,5	316	1200

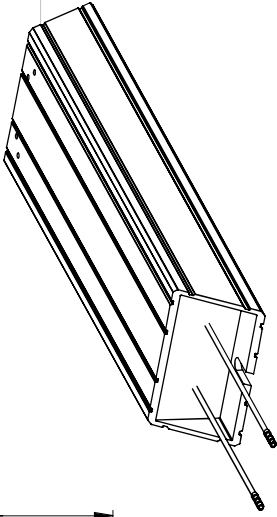

* Nominal distance
** Recommended distance between end user mounting holes

Specifications	
Cable:	UL Approved, Min. 250°C, 600V, AWG 14.
IP CLASS	50



Næstvedvej 20
2610 Rødovre
Denmark
www.danotherm.com

CBH XXX CH 414 xxR YT

Date:
11.10.2013

Creator:
SAPU

Approved:
clhe

Scale:
1:1

No.:
3

Last Revision:
IP 50 as revision 1

Rev Date:
23-04-2019

By:
clhe

Size:
A3

Unit: mm

Drawing No.:
414CBH-CH

Material:
Alt. Material:
Surface:
Tolerance:

Treatment:
Weight:

Path: C:\Dano\Customers\

Sheet: 1 of 1

This drawing is the property of DANOTHERM ELECTRIC A/S and must not be copied without their consent. Any amendment must be confirmed.