



Features:


- Costante Cell: 0,1 cm⁻¹ or K=10
- Body material PP (80°C)
- Stainless steel 316L electrodes
- Pt100 temperature sensor included
- Mechanical Connection: 3/4 Gas M PP

Field Application:

- Waste water
- Drinking Water
- Cooling Towers
- Irrigation
- Reverse Osmosis

Code: 9900101102

Dimensions

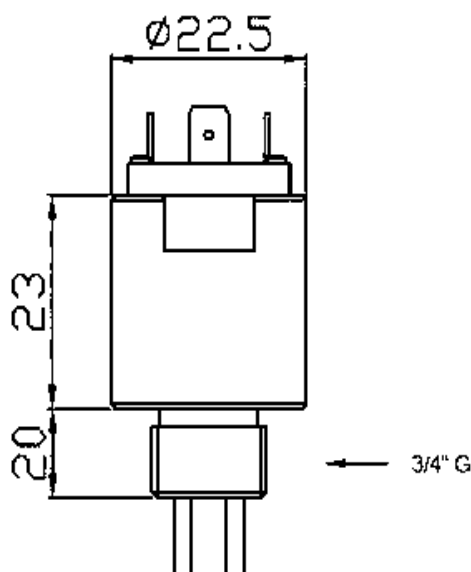

Technical characteristics

Measurement range:	0,5÷2000µS
Costante [C-K]:	C=0,2 cm-1 K=5cm
Temp. Range:	80° C
Pressure Range:	6(*) bar
Body material:	PP-AISI 316
Mounting Process:	3/4" G.M.
Cable:	Plug(**)

(*)The maximum pressure of 6 bars is guaranteed at 25 °C. As the temperature increases, the pressure decreases linearly and at 50° or 80 °C, the maximum pressure is 1 bar.

(**)To be used in conjunction with CC series cables.