



Damcos™ BRC Series

Hydraulic Double-acting Balanced Rotary Actuator
90° Quarter-Turn




BRC 125




BRC 250



BRC 500




BRC 1000



BRC 2000




BRC 4000

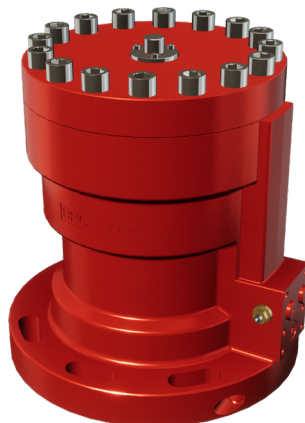

BRC 8000




BRC16000

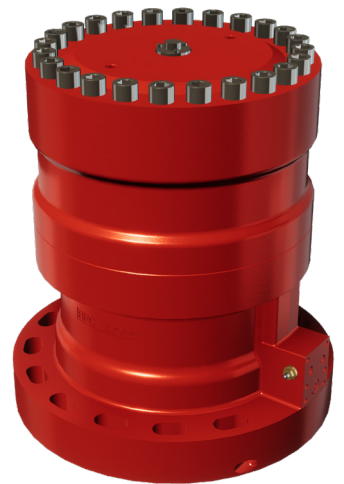

BRC 32000

The BRC Actuator for Preparation of Quarter-Turn Valves

- Unique and simple design with built-in crossover valve.
- Compactness and high-torque output.
- Reliable and rugged, with more than 30 years service records on basic design.
- Balanced rotary principle eliminates side forces and/or bending of valve spindle.
- Will operate in sea air as well as sea water.
- Easy adaption to all well-known quarter-turn valves.
- Unlimited mounting positions and with built-in adjustments for end stops of rotary movement.
- Prepared for direct built-on modular control functions.

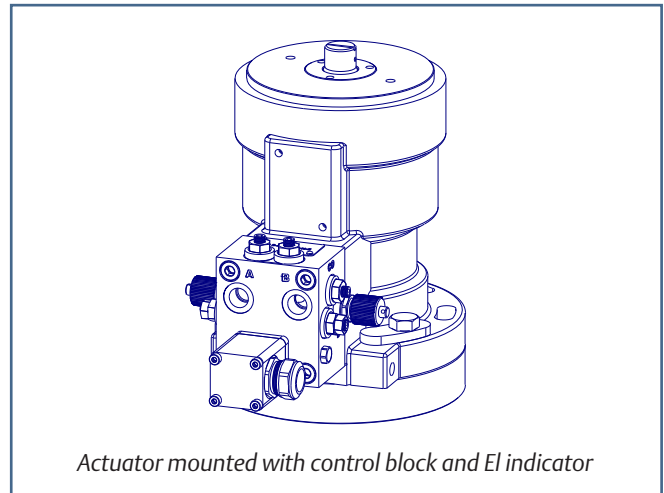

Standard Optionals

- Hydraulic on/off indication (bypass).
- EI on/off or continuous indication IP 68.
- Connection block with e.g. filter.
- Double pilot operated non-return valve.
- Double release valve.
- Double throttle valve.
- Quick connection for emergency operation with portable hand pump.
- Built-on emergency operation hand pump.
- Submersion cover.
- Epoxy coating.

On request spec. features as:

- Flushing valve built into the connection block making it possible to flush the system without disconnection of pipes.
- Safety equipment as mechanical locking device of actuator in closed position.

Actuator Mounted Control Equipment

See separate data sheet for the whole range of control blocks and other actuator mounted control components.
(Interface for Cetop 3 valves).

Manufacture

The BRC actuators are manufactured in accordance with the guidelines for quality system stated in the ISO standard.

After assembly each actuator is flushed according to ISO 4406 21/19/16 standard and plugged.
Flushing according to ISO 4406 18/16/13 standard can be performed on request.

Classification

Meets the requirements from the major classification and approval authorities like:

- Det Norske Veritas
- Lloyd's Register of Shipping
- American Bureau of Shipping
- RINA
- Russian Register of Shipping
- Bureau Veritas
- Germanischer Lloyd
- U.S Coast Guard

Main Data

Temperature range	-20°C to +80°C, seals NBR (other temp. ranges on request)
Housing	GGG 40
Piston	GGG 40
Output shaft	SS 2142
Indicator shaft	AISI 316
Intermediate flange	St 52-3/AISI 316/GGG40
Adapter	SS 2142
Coating	Primer: Min. 40 micron, type Hempel EE 13140 Top coat: min. 25 micron alkyd, red no. 51320


Operating Restrictions

Please observe specific rules and demands from the classification societies and authorities concerning operating pressure and temperature range.

(Example - ABS: Max. operating pressure = 20% of burst pressure).

For extreme cycle speeds, loads and lifetime expectations please consult manufacturer.

Turning direction in relation to “A” and “B”

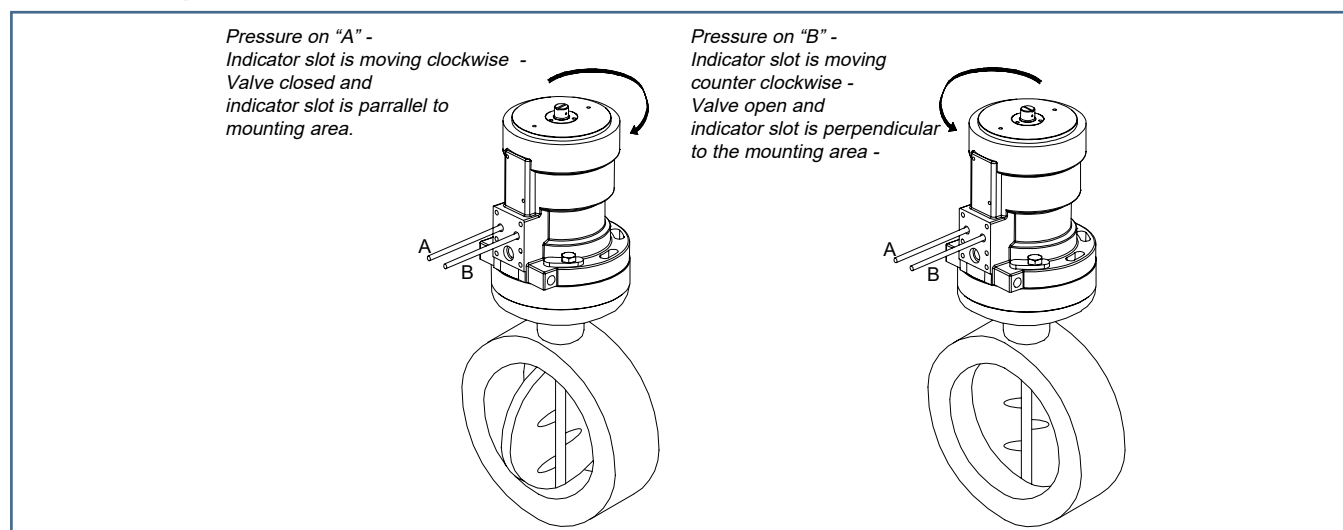

©2021 Emerson. All rights reserved.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Damcos and the Damcos logotype are trademarks of Damcos A/S. Damcos is a member of the Emerson family of companies. All other marks are the property of their respective owners.

Emerson Automation Solutions

Damcos A/S
Aaderupvej 41
DK-4700 Naestved
T +45 5578 7200
F +45 5578 7272

www.Emerson.com/marine

The contents of this publication are presented for information purposes only, and while effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, expressed or implied, regarding the products or services described herein or their use or applicability. Standard Terms and Conditions of Sale can be issued by contacting Damcos A/S. We reserve the right to modify or improve the designs and specifications of our products at any time without notice. Damcos A/S accepts no responsibility for any errors that may appear in this publication.