
FIRST FILTERING STAGE	N° of filters elements	24
PREFILTER	Filter type	IFP 550
	Efficiency	G4 according to EN779
	Max. flow	3.000 Nm³/h (each)
	Dimension	Height 540 mm Length 870 mm Depth 48 mm
	Material	Polyamide filter media, Galvanised frame
	Cleaning	Cleanable with water or compressed air
	DP at the nominal flow rate	Initial 60 Pa Max. 250 Pa

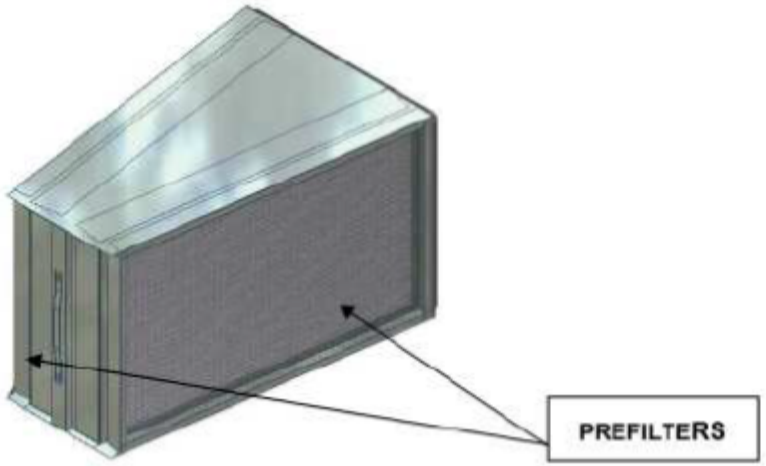

Type	Stage	Filtering surface m^2	Nominal flow rate m^3/h	Pressure drop at nominal air flow rate Pa			Efficiency		Remarks
				Initial	Suggested value	Collapse pressure	Rate	Standard	
PREFILTER	1ST	0,9	3000	60	250	500	G 4	EN 779	Tmax = 80 °C H.R. = 100% Cleanable self-estinguishing galv. frame