


ERMETO ORIGINAL

DG-R - Ball Bearing Rotary Fittings

Tube connection according to DIN 2353, series S (heavy)

Male thread: BSP (parallel)

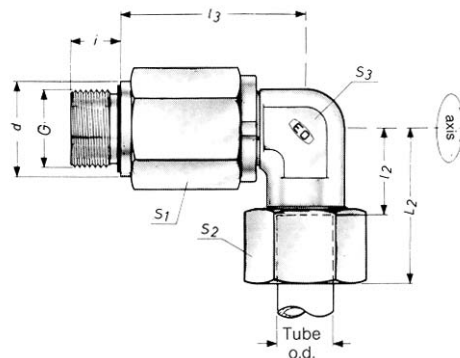

Male stud elbow rotary fittings:
DG 104/--PSR

Tube o.d.	Nominal bore	i	l ₁	l ₂	l ₃	L ₁	L ₂	S ₁	S ₂	S ₃	S ₄	d	Male stud BSP thread G	DG 104/--PSR Part No.	kg per 100 pcs.
6	4	12	42	16	39,5	57	31	22	17	17	17	19	G 1/4 A	DG 104/ 6-PSR	14,9
8	6	12	42	17	39,5	57	32	22	19	17	17	19	G 1/4 A	DG 104/ 8-PSR	15,4
12	10	12	52,5	21,5	51	69	38	30	24	22	24	22	G 3/8 A	DG 104/12-PSR	31,4
16	13	14	51,5	24,5	49	70	43	30	30	22	27	27	G 1/2 A	DG 104/16-PSR	35,2
20	16	16	65,5	26,5	67	87,5	48	41	36	36	36	32	G 3/4 A	DG 104/20-PSR	80,0
25	20	18	66	30	65	90,5	54	41	46	36	41	40	G 1 A	DG 104/25-PSR	94,6
30	25	20	75,5	35,5	82,5	102	62	60	50	50	46	50	G 1 1/4 A	DG 104/30-PSR	196,2
38	32	22	76	41	80,5	107	72	60	60	50	55	55	G 1 1/2 A	DG 104/38-PSR	215,3

Fingers shown are approx. dimensions with tightened nut.

P
A
G
E

BACK TO

PLEASE SEE FOLLOWING PAGES FOR FURTHER DETAILS

CATALOGUE