



**officine
orobiche**

quantity

1

off No.

P17/2390 pos 1 of 1 rev 0

model

62.JL.2L.M14.EP

Density

temp. es / prog

press. es / prog

tag

fluid

Kg/dm3

°C

barg

switch point H / L

s1		LIQUID	1	20 / 40	1 / 1	.66 - 94
s2						
s3						
s4						
s5						

01	body mat.	AISI 316L	21	body rating	ANSI 150
02	connections pos.	SIDE - SIDE 178 mm	22	hydraulic test	24 barg
03	connections type	1"ANSI 150 RF 125-250 AARH	23		
04	drain	1" NPTF	24	float	AISI 316L
05	vent	.	25		


06	housing	ALUMINIUM ATEX II 2 G Ex d IIC T6 o T5 Gb	26		
07		II 1/2 D Ex ta/tb IIIC T 85°C o T100°C Da/Db	27		
08	AREA	Body ATEX II 2 GDc Tx	28		

09	electric connection	1/2 " NPTF	29		
10	switch groups	N. 1	30		
11	microswitch	M14 (inert gas hermetically sealed)	31		
12	contact	SPDT (250 V AC 1 A)	32	nace	no
	connector	.			
13	cable gland	.	33		

14	fins	.	34		
15	paint	.	35		
16	attraction sleeve	AISI 430	36	label	ALUMINIUM
17			37		

18	tube	AISI 316L	38		
19	internal parts	AISI 316L	39		
20	antisteam	NO	40		

v1					
v2					
v3					
v4					
v5					
n1					
n2					
n3					
n4					
n5					
A	.				

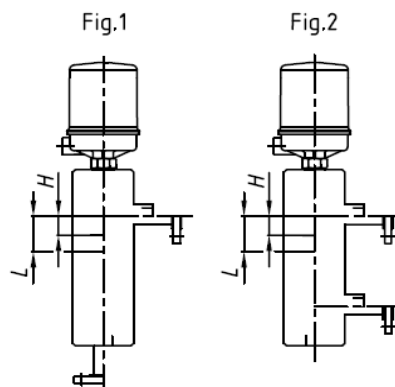

mag-17

issued UV.....date