


SPECIFICATIONS

FULLTECH ELECTRIC CO., LTD

ITEM	MODEL	UF-12B11BTH
RATED VOLTAGE		AC115V
VOLTAGE RANGE		AC103-126V
SPEED(RPM)		50Hz 2400 RPM±10% 60Hz 2900 RPM±10%
RATED CURRENT		50Hz 0.15 A±10% 60Hz 0.12 A±10%
RATED INPUT		50Hz 14 W±10% 60Hz 11 W±10%
LOCKED CURRENT		50Hz 0.16 A±10% 60Hz 0.15 A±10%
MAX. AIR VOLUME		50Hz 58±10% CFM 60Hz 69±10% CFM
MAX. STATIC PRESSURE		50Hz 0.17±10% inH2O 60Hz 0.16±10% inH2O
OPERATING TEMP.		-40°C~+70°C
MAX. OPERATING HUMIDITY		85%
STORAGE TEMP.		-40°C~+80°C
ROTATING DIRECTION		CLOCKWISE DIRECTION
BLOWING DIRECTION		EXHAUST OVER STRUTS
INSULATION RESISTANCE		DC 500 V 100MΩ
DIELECTRIC STRENGTH		AC 1500V / 1MIN.
NOISE		50Hz 38 dB±10% 60Hz 42 dB±10%
SAFETY PROTECTION		IMPEDANCE PROTECTION
INSULATION GRADE		CLASS B
BEARING		BALL BEARING
LIFE EXPECTANCY		OVER 40000 HOURS (40°C)
FRAME MATERIAL		ALUMINUM (ADC-12)
IMPELLER		PLASTIC 94V-0 PBT. COVERING GLASS FIBER
DIMENSION		120 * 120 * 25 mm.
WEIGHT		0.33 KG.

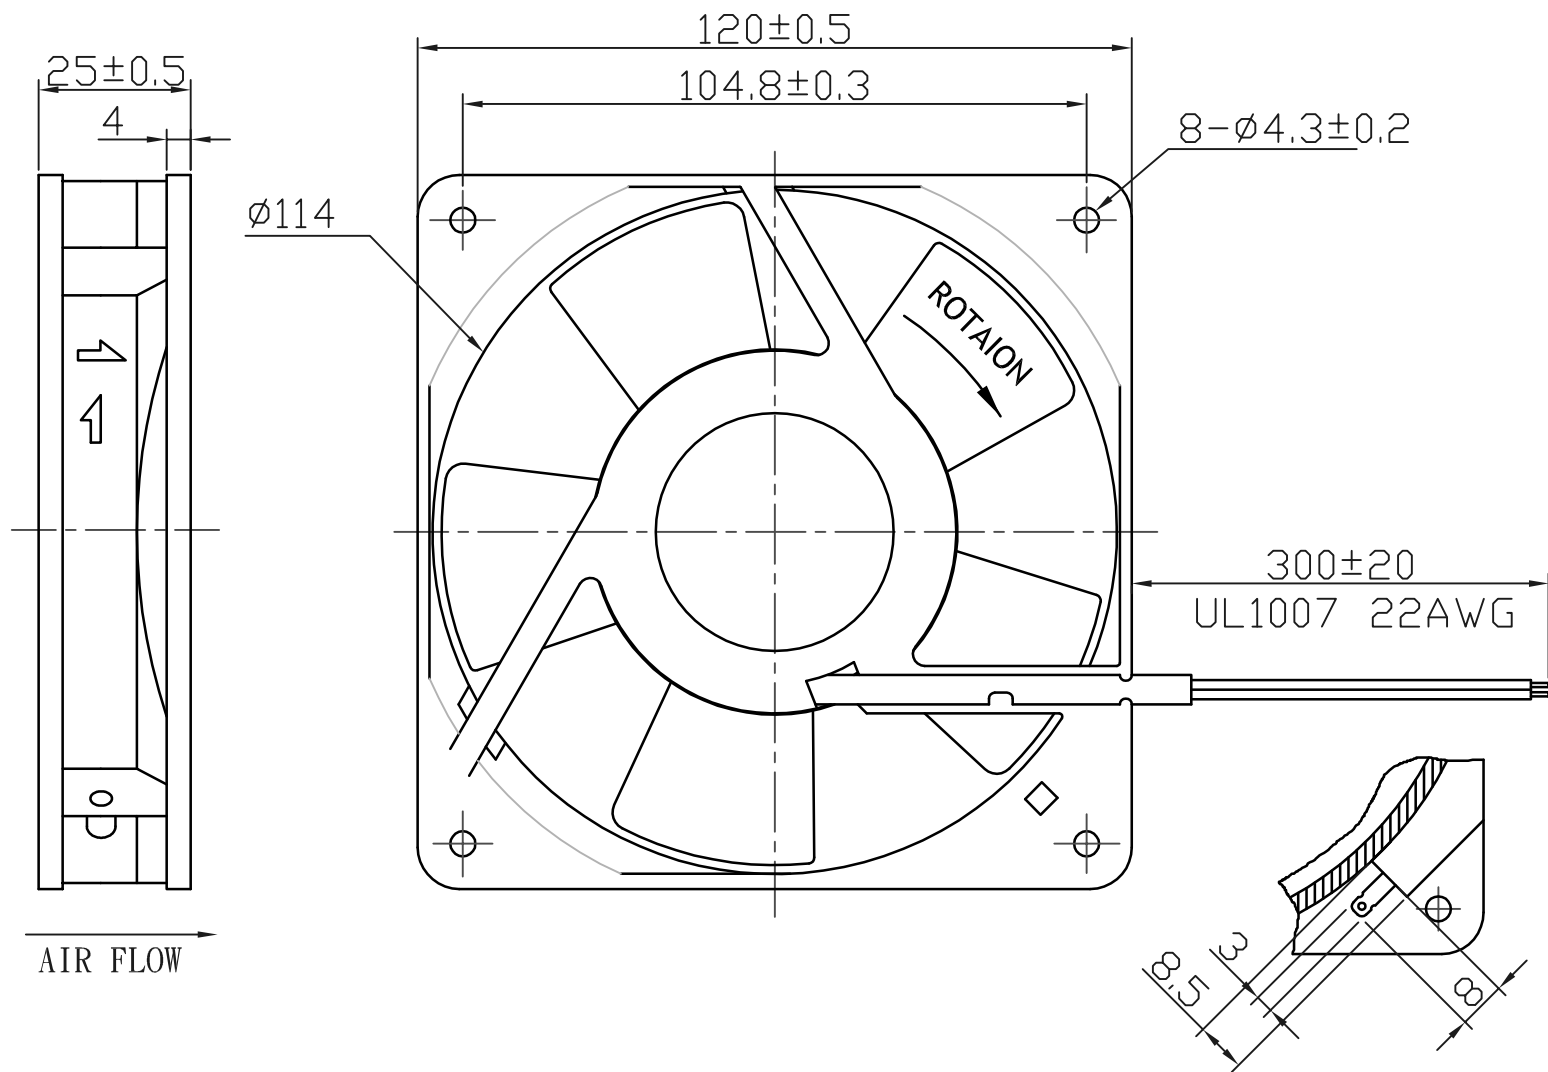

Terminal or Lead Wire Type

MODEL:UF12B

UF - 12B11-H

