

FEATURES

Compact design and low weight enables easy installation on electropneumatic or electrohydraulic valve.

TECHNICAL DATAS

Pilot fluids water, air,
 Temperature range -10°C to +60°C
 Maximum viscosity 53 cSt

CONSTRUCTION

Body brass
 Internal parts stainless steel
 Springs stainless steel
 Seats stainless steel
 Sealing FKM



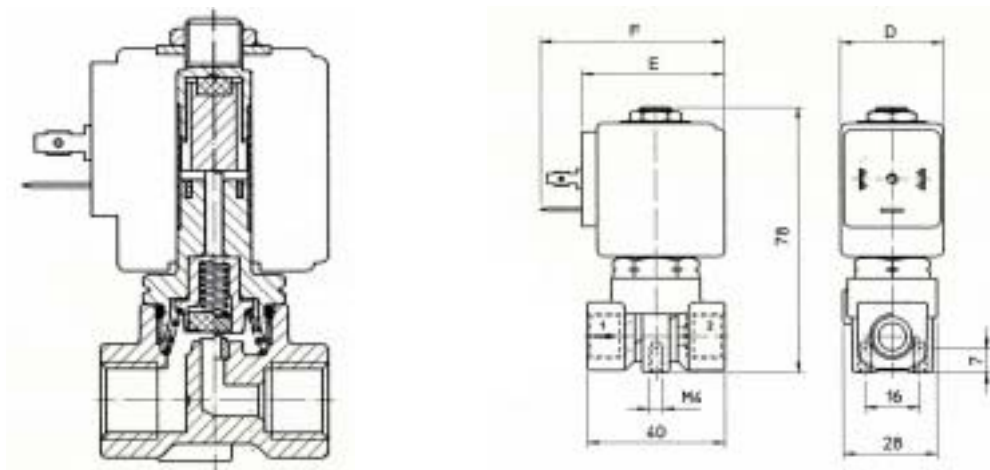
ELECTRICAL CHARACTERISTICS

Nominal power rating 8 W
 Protection IP 65 EN 60529 (DIN40050)
 Coil insulation class F (155°C)
 Connector spade plug (Pg9 or Pg11)
 Connector specification ISO 4400
 Electrical safety IEC335



Ø Pipe size	Ø orifice size	Kv	Voltage	Dimensions			Reference	Differential Pressure max.
G	mm	l/min	V - Hz	D	E	F		
1/4"	2,5	3,2	24 V - 50/60Hz	30	42	54	7 300 055	14 bar

DIMENSIONS


7_300_055