Air Booster Nozzles

42mm wide


- ▸Uniform distribution resulting from the unique flat design.
- ▸42mm wide standard flat air nozzle with ϕ1.0mm orifice.

Flat Type




【Spray pattern】



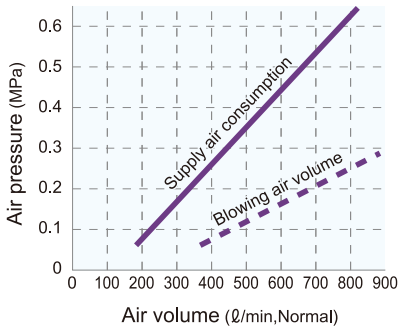

■ DIMENSIONS

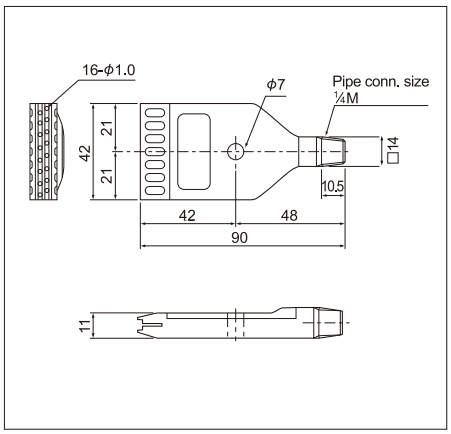

Material: PPS
Mass: 30g
Max. air pressure: 0.7MPa (100psi)
Max. allowable temperature: 130°C (260°F)

24mm wide Compact type


- ▸Ultra-compact air nozzle (24mm wide, 30mm long) with equal high spray impact and minimal noise level.
- ▸Compact enough to install in a narrow space, such as for blow-off drying in corners.

Flat Type




【Spray pattern】



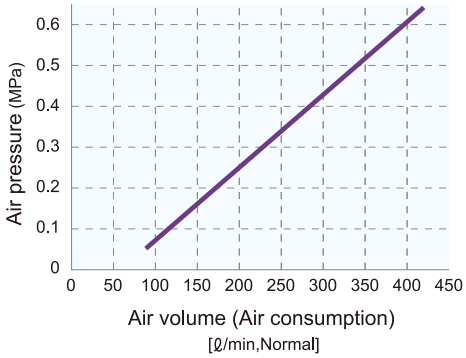

■ DIMENSIONS

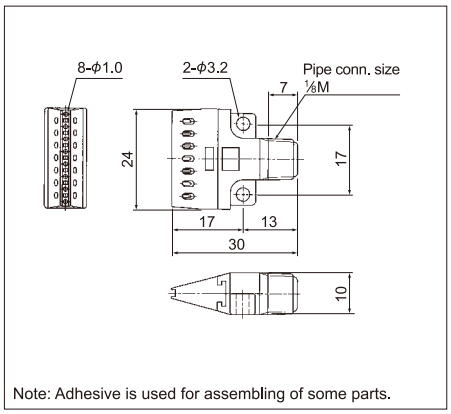

Note: Adhesive is used for assembling of some parts.

Material: PPS
Mass: 4g
Max. air pressure: 0.7MPa (100psi)
Max. allowable temperature: 130°C (260°F)

How to order

Please inquire or order for a specific nozzle using this coding system.

①42mm type

1/4M(PT) TF-F 42-16-010 PPS

Thread type
- (PT)
- (NPT)

②24mm compact type

1/8M TF-F 24-8-010 PPS-IN