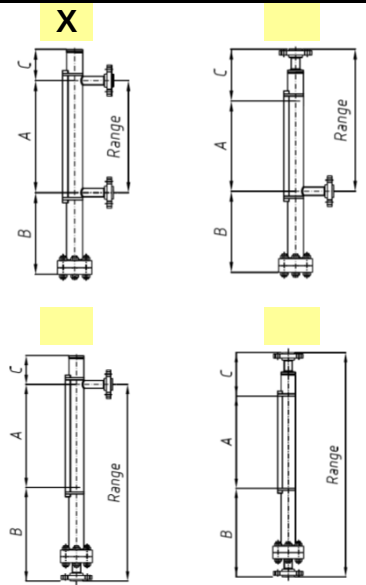


 Officine Orobiche		data sheet for level indicator series 2000				off No. P17/4162	
		quantity 2		pos 4 of 5 rev 0			
		model 2006.P.5.V.					
tag		fluid	Density kg/dm3	temp. °C min/oper/des	press. barg min/oper/des		
s1	.	LIQUID	1	./20/40	1/1		
s2	.	LIQUID	1	./20/40	1/1		
s3	.	.	.				
s4	.	.	.				
s5	.	.	.				
s6	.	.	.				
s7	.	.	.				
s8	.	.	.				
s9	.	.	.				
s10	.	.	.				
01	connections type	SIDE - SIDE 1"ANSI 150 FF .					
02	drain / vent	1/2" GASF / 1/2" GASF					
03	Execution	.					
04	body mat.	PVC		26	alarms No. . . .		
05	Chamber size	63X3		27			
06	range / visibility	1000 mm / 1000 mm		28	.		
07	float	PVC		29	transmitter		
08	bolts	INOX		30			
09	graduated scale	NO / .		31			
10	float brok. Ind.	NO		32			
11	indicator housing	ALUMINIUM & POLYCARBONATE		33			
12	anti frost	NO .		34			
13	gaskets	VITON		35			
14	.	.		36	pressurized	NO	
15	size B & C mm	225 - 85		37	body rating	PN 6	
16	Test NDE	NO		38	hydraulic test	9 barg .	
17	Test PMI	NO		39	nace	NO	
18	Quality control plan N.	.10/01		40	spec. Customer/Technical	.	
19	amb. Temp. min/max	0 / 40°C .		41	dim. drawing	A-521	
20	shut-off valves	. . .					
21	drain valve	. . .					
22	vent valve	. . .					
23	label	ALUMINIUM					
24	PED 2014/68/UE	Art. 4.3					
25	AREA	.					
v1							
v2							
v3							
v4							
v5							
n1							
n2							
n3							
n4							
n5							
issued UV.....date							