
RWTK15-ATEX TRANSDUCER DATASHEET

Model number	**RWTK15-ATEX**
Range	10 metres
Temperature compensation	Yes
Frequency (kHz)	41.5 kHz
Beam angle at -3dB	12 degrees
Face material	PVDF
Process temperature °C **	-40° to +90°
Protection	IP68
Weight (KG)	0.6
Mounting connection	M20
Hazardous Area approval	Yes



* For flange options please contact Hycontrol. Material to suit applications.

** -40°C to +60°C for ATEX

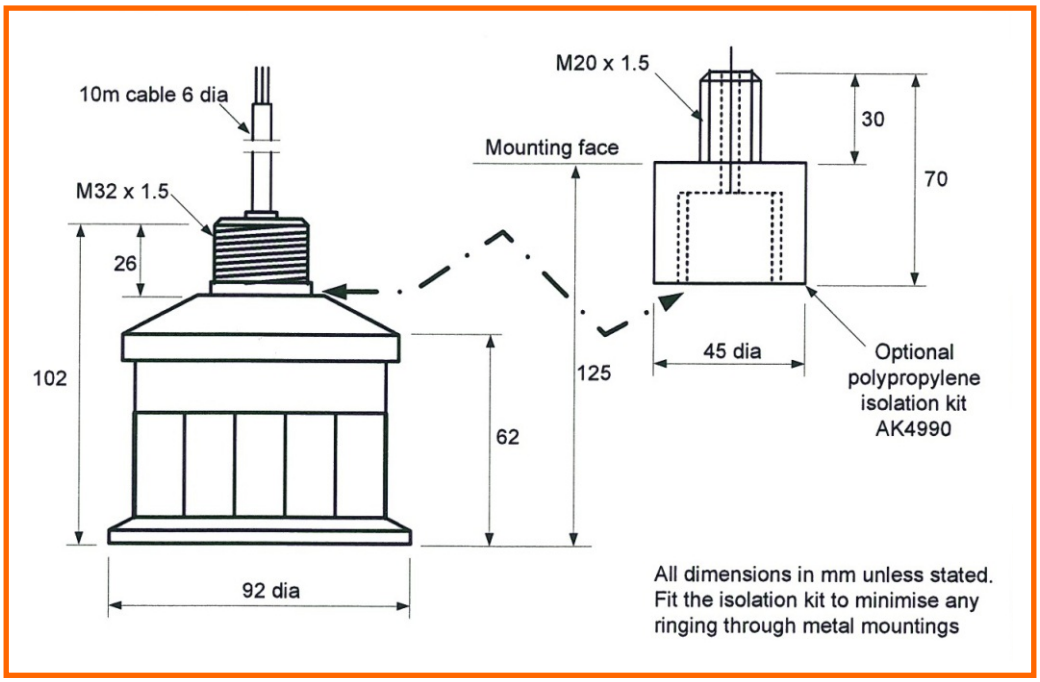

HYCONTROL
SILO PROTECTION SOLUTIONS

Hycontrol, Orchard Street, Redditch, Worcestershire B98 7DP
Tel: +44 (0) 1527 406800 / sales@hycontrol.com / www.hycontrol.com