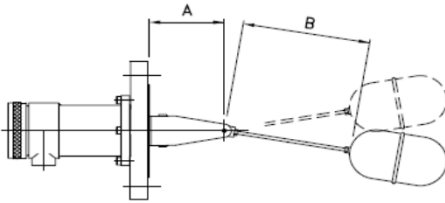
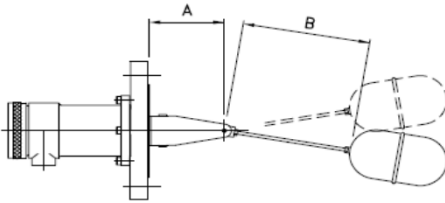


 Officine Orobiche		data sheet for level switch series 10				doc. N. P18/1257		
		quantity 1		pos 1 of 1 rev 0				
		model 10.PF.PF.M1.WP.						
tag		fluid	Density kg/dm3	temp. °C min/oper/des	press. barg min/oper/des	switch point mm H L		
s1		HCL SOL. 2.5-5%	1	./20./50	0./1	.	.	
s2						.	.	
s3						.	.	
s4						.	.	
s5						.	.	
s6						.	.	
s7						.	.	
s8						.	.	
s9						.	.	
s10						.	.	
01	connections pos.	SIDE						
02	connections type	3"ANSI 150 FF						
03	.	.						
04	.	.						
05	body mat.	PVDF	26	label body rating hydraulic test form		ALUMINIUM PN 6 9 barg FIG.1		
06			27					
07			28					
08			29					
09	internal parts	PVDF	30					
10	.	.	31	rod "B" support "A"		150mm 50mm		
11	.	.	32					
12		PVDF	33					
13	float	n°1 Ø50x250mm	34					
14	.	.	35					
15	nace	no	36					
16	.	.	37					
17	.	.	38					
18	housing	ALUMINIUM WP (IP 55)						
19	electric connection	1/2" GAS						
20								
21	switch groups	n°1 M1 SPDT (220VAC 5 A) res						
22	connect/cable gland	.						
23	amb. Temp. min/max	0 / 45°C		Fig.1 				
24	PED 2014/68/UE	Art. 4.3						
25	AREA							
v1							Fig.1 	
v2								
v3								
v4								
v5								
n1								
n2								
n3								
n4								
n5								
dic-17								
issued UV.....date								