


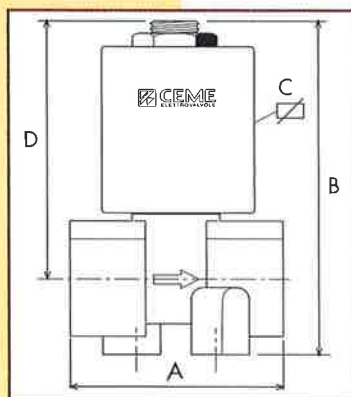

CARATTERISTICHE SPECIFICATIONS

ATTACCHI PIPES in → out	Ø mm	CODICE CODE	KV m ³ /h	M.O.P.D. bar AC DC		DIMENSIONI/DIMENSIONS mm A B C D				PESO/WEIGHT Kg
1/2"-1/4" M-M	4,0	6601	0.250	6	4	72.5	61	47	52	0.260
1/4" NPT	4,0	6604	0.260	6	4	35	62.5	47	50	0.225
1/4" NPT	3,2	*6605	0.220	8	5	35	63	47	50	0.220
NEW 3/8" NPT	4,0	*6606	0.390	6	4	40	70	47	57	0.310
NEW 1/2" NPT	4,0	*6607	0.390	6	4	46	70	47	57	0.300
1/8"	3,0	*6609	0.170	9	5	35	63	47	50	0.220
1/4"	2,0	*6610	0.085	25	12	35	63	47	50	0.220
1/4"	3,0	*6610	0.170	9	5	35	63	47	50	0.220
1/4"	4,0	*6610	0.250	6	4	35	63	47	50	0.220
1/8"	2,0	6611	0.085	25	12	35	63	47	50	0.220
1/8"	3,0	6611	0.170	9	5	35	63	47	50	0.220
1/4"	2,0	6612	0,085	25	12	35	63	47	50	0,220
1/4"	3,0	6612	0.170	9	5	35	63	47	50	0.220
NEW 3/8"	4,0	*6613	0.390	6	4	40	70	47	57	0.310
NEW 1/2"	4,0	*6614	0.390	6	4	46	70	47	57	0.300
R 1/8"-P.G.	2,0	6622	0.085	25	12	55	58	47	50	0.240
1/4"-P.G.	2,2	6625	0.115	23	11	46	59	47	50	0.230
R 1/8"-P.G.	2,0	6628	0.085	25	12	44	58	47	50	0.190
1/4"-P.G.	2,0	6630	0.085	25	12	34	58	47	50	0.190
1/4"	3,0	6660	0.170	9	5	57	73.5	47	55	0.265

P.G.=PORTAGOMMA Ø 5.4 - HOSEBIB Ø 5.4 - SCHLAUCHNIPEL Ø 5.4

* UNICHE VERSIONI CON FORI DI FISSAGGIO - ONLY THESE EXECUTIONS AVAILABLE WITH FIXING HOLES
NUR DIESE AUSFUEHRUNGEN ERHAELTICH MIT BEFESTIGUNGSFUESSE

CARATTERISTICHE ELETTRICHE ELECTRICAL INFORMATION

		POTENZA/POWER	
		NOMINALE HOLDING	SPUNTO IN RUSH
V~	12 24 48 110 230 400	50 60 Hz	17VA 24VA
V=	12 24 48 110		16W

Per dettagli costruttivi sulle bobine vedi capitolo "INFORMAZIONI DI PROGETTO"
For construction details of the coils see chapter "PROJECT INFORMATION"
Ausführliche Daten über die Ventilsolen finden Sie unter Abschnitt "TECHNISCHE
INFORMATIONEN"

MAX TEMPERATURA MAX TEMPERATURE

FLUIDI/FLUIDS				AMBIENTE/AMBIENT
NBR	EPDM	FPM		80°C
90°C	150°C	150°C		

Disponibili bobine per temp. ambienti fino a 120°C
Coils available for ambient temperatures up to 120°C
Spulen verfügbar für Umgebungstemperaturen bis zu 120°C