Hydraulic Vertical Lifting Wedge

ENERPAC
POWERFUL SOLUTIONS. GLOBAL FORCE.

▼ **LW-16 with SB-2 and optional LWB-1**



LW Series

Maximum Lifting Force:
16 ton (157 kN)

Lifting Stroke:
21 mm

Tip Clearance / Maximum Spread*:
10 mm / 81,5 mm

Maximum Operating Pressure:
700 bar



Best Match Hand Pump

To power your Enerpac Machine Lift, the Enerpac P-392 hand pump is an ideal choice.

Page: 66



Control Manifolds

Control Manifold to control two or four lifting wedges simultaneously.


AM-21 with 3 ports 3/8" NPTF
AM-41 with 5 ports 3/8" NPTF.

Page: 124

- **Requires very small access gap of only 10 mm**
- **Lifting force 16 ton at 700 bar hydraulic pressure**
- **Each step can spread under full load**
- **Straight vertical lifting**
- **Unique interlocking wedge design: no first step bending and risk of slipping out**
- **Single-acting, spring return cylinder**
- **Lifting wedge LW-16 includes safety block SB-2**
- **Includes RC-Series Cylinder with CR-400 coupler.**

▼ *For lifting heavy equipment with minimum floor clearance the LW-16 is the ideal tool.*



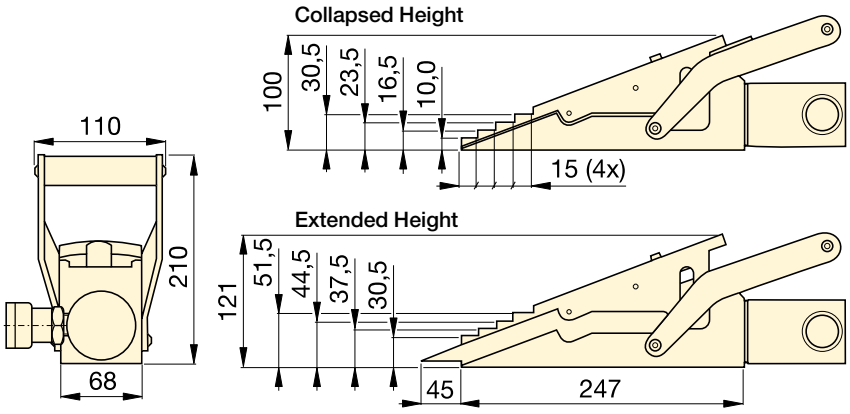

Maximum Lifting Force ton (kN)	Lifting Stroke (mm)	Model Number	Tip Clearance (mm)	Maximum Operating Pressure (bar)	Oil Capacity (cm^3)	(kg)
16 (157)	21	**LW-16**	10	700	78	9,0

Use optional stepped block **LWB-1** to increase wedge lifting height by 30 mm.
* Using LWB-1.