

PRODUCT INFORMATION SHEET

Actual status: 15.02.18




IN-/OUTPUT MODULE MINI

VdS-approval G 206047

AMD 3311

Part-No.: 30513

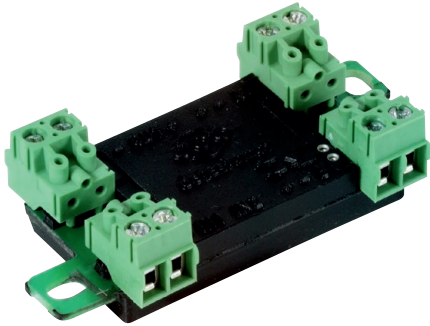

Intelligent Input / Output module mini for the Loop 3000 with bidirectional isolator for the integration in special detectors and externally connected modules according to EN 54-18. Including one monitored input and one open collector output

- Connecting module with one freely programmable input and one freely programmable output
- Additional parallel alarm output (blinking) for the control of a status indicator (without series resistor)
- Programming of different switching variants of input and output also with time control
- Monitoring of the operating status via Loop 3000
- Independent programming of input and output
- Automatic and manual addressing with Loop 3000
- Integrated Isolator and T-branch option
- Completely encapsulated module for the integration in special applications with control by the Loop 3000
- Functions completely integrated via Loop 3000-protocol
- For VdS-conform installation in housing Mini 25L (part-no. 53372)

Technical Data

Supply Voltage	15 V to 30 V DC (2-wire bus)
Quiescent Current	380 μ A
Alarm Current	380 μ A; 5 mA with activated LED
Output	1 Open collector 500 mA; 1 x 10 mA parallel for status LED
Protection class	IP 30
Ambient temperature	-10°C to +60°C
Humidity	max. 95%
Dimensions (H x B x T)	27 mm x 73 mm x 15 mm
Weight	appr. 20 g
Material	ABS, Glass
Colour	black
Standards	DIN EN 54-18, EN 54-17
VDS-approval	G 206047
System-approval	S 210001
CE-CPD-Number	0786-CPD-20530