213-23□□-01610-2

モデル Model	一回転容量 Displacement cm³/rev	回転数 Speed r.p.m		最高定格圧力 Max. Press.	常用圧力 Working Press.	G mm	H mm	質量 (kg) Weight
		Max	Min	MPa (kgf/cm²)				
320	20.9	3500	1000	19.6 (200)	15.7 (160)	113.0	56.3	5.3
325	25.5	3000	800	19.6 (200)	15.7 (160)	113.0	56.3	5.3
331	31.7	3000	600	19.6 (200)	15.7 (160)	113.0	56.3	5.6
340	40.1	3000	500	19.6 (200)	15.7 (160)	113.0	56.3	5.6
350	51.1	3000	500	19.6 (200)	15.7 (160)	139.5	69.5	6.7
360	62.0	3000	500	17.2 (175)	15.7 (160)	139.5	69.5	6.7
371	72.8	2500	400	14.7 (150)	13.7 (140)	139.5	69.5	6.9
380	82.1	2500	400	13.7 (140)	13.7 (140)	139.5	69.5	6.9

(番号) DWG. No.
213-23□□-01610-2
モデル MODEL

(呼称) NAME
M□□□ KX A
モデル MODEL
軸形状 (キー駆動) SHAFT TYPE. (KEY DRIVE)

( ) 内ハ参考値
THE VALUE IN ( ) IS REFERENCE

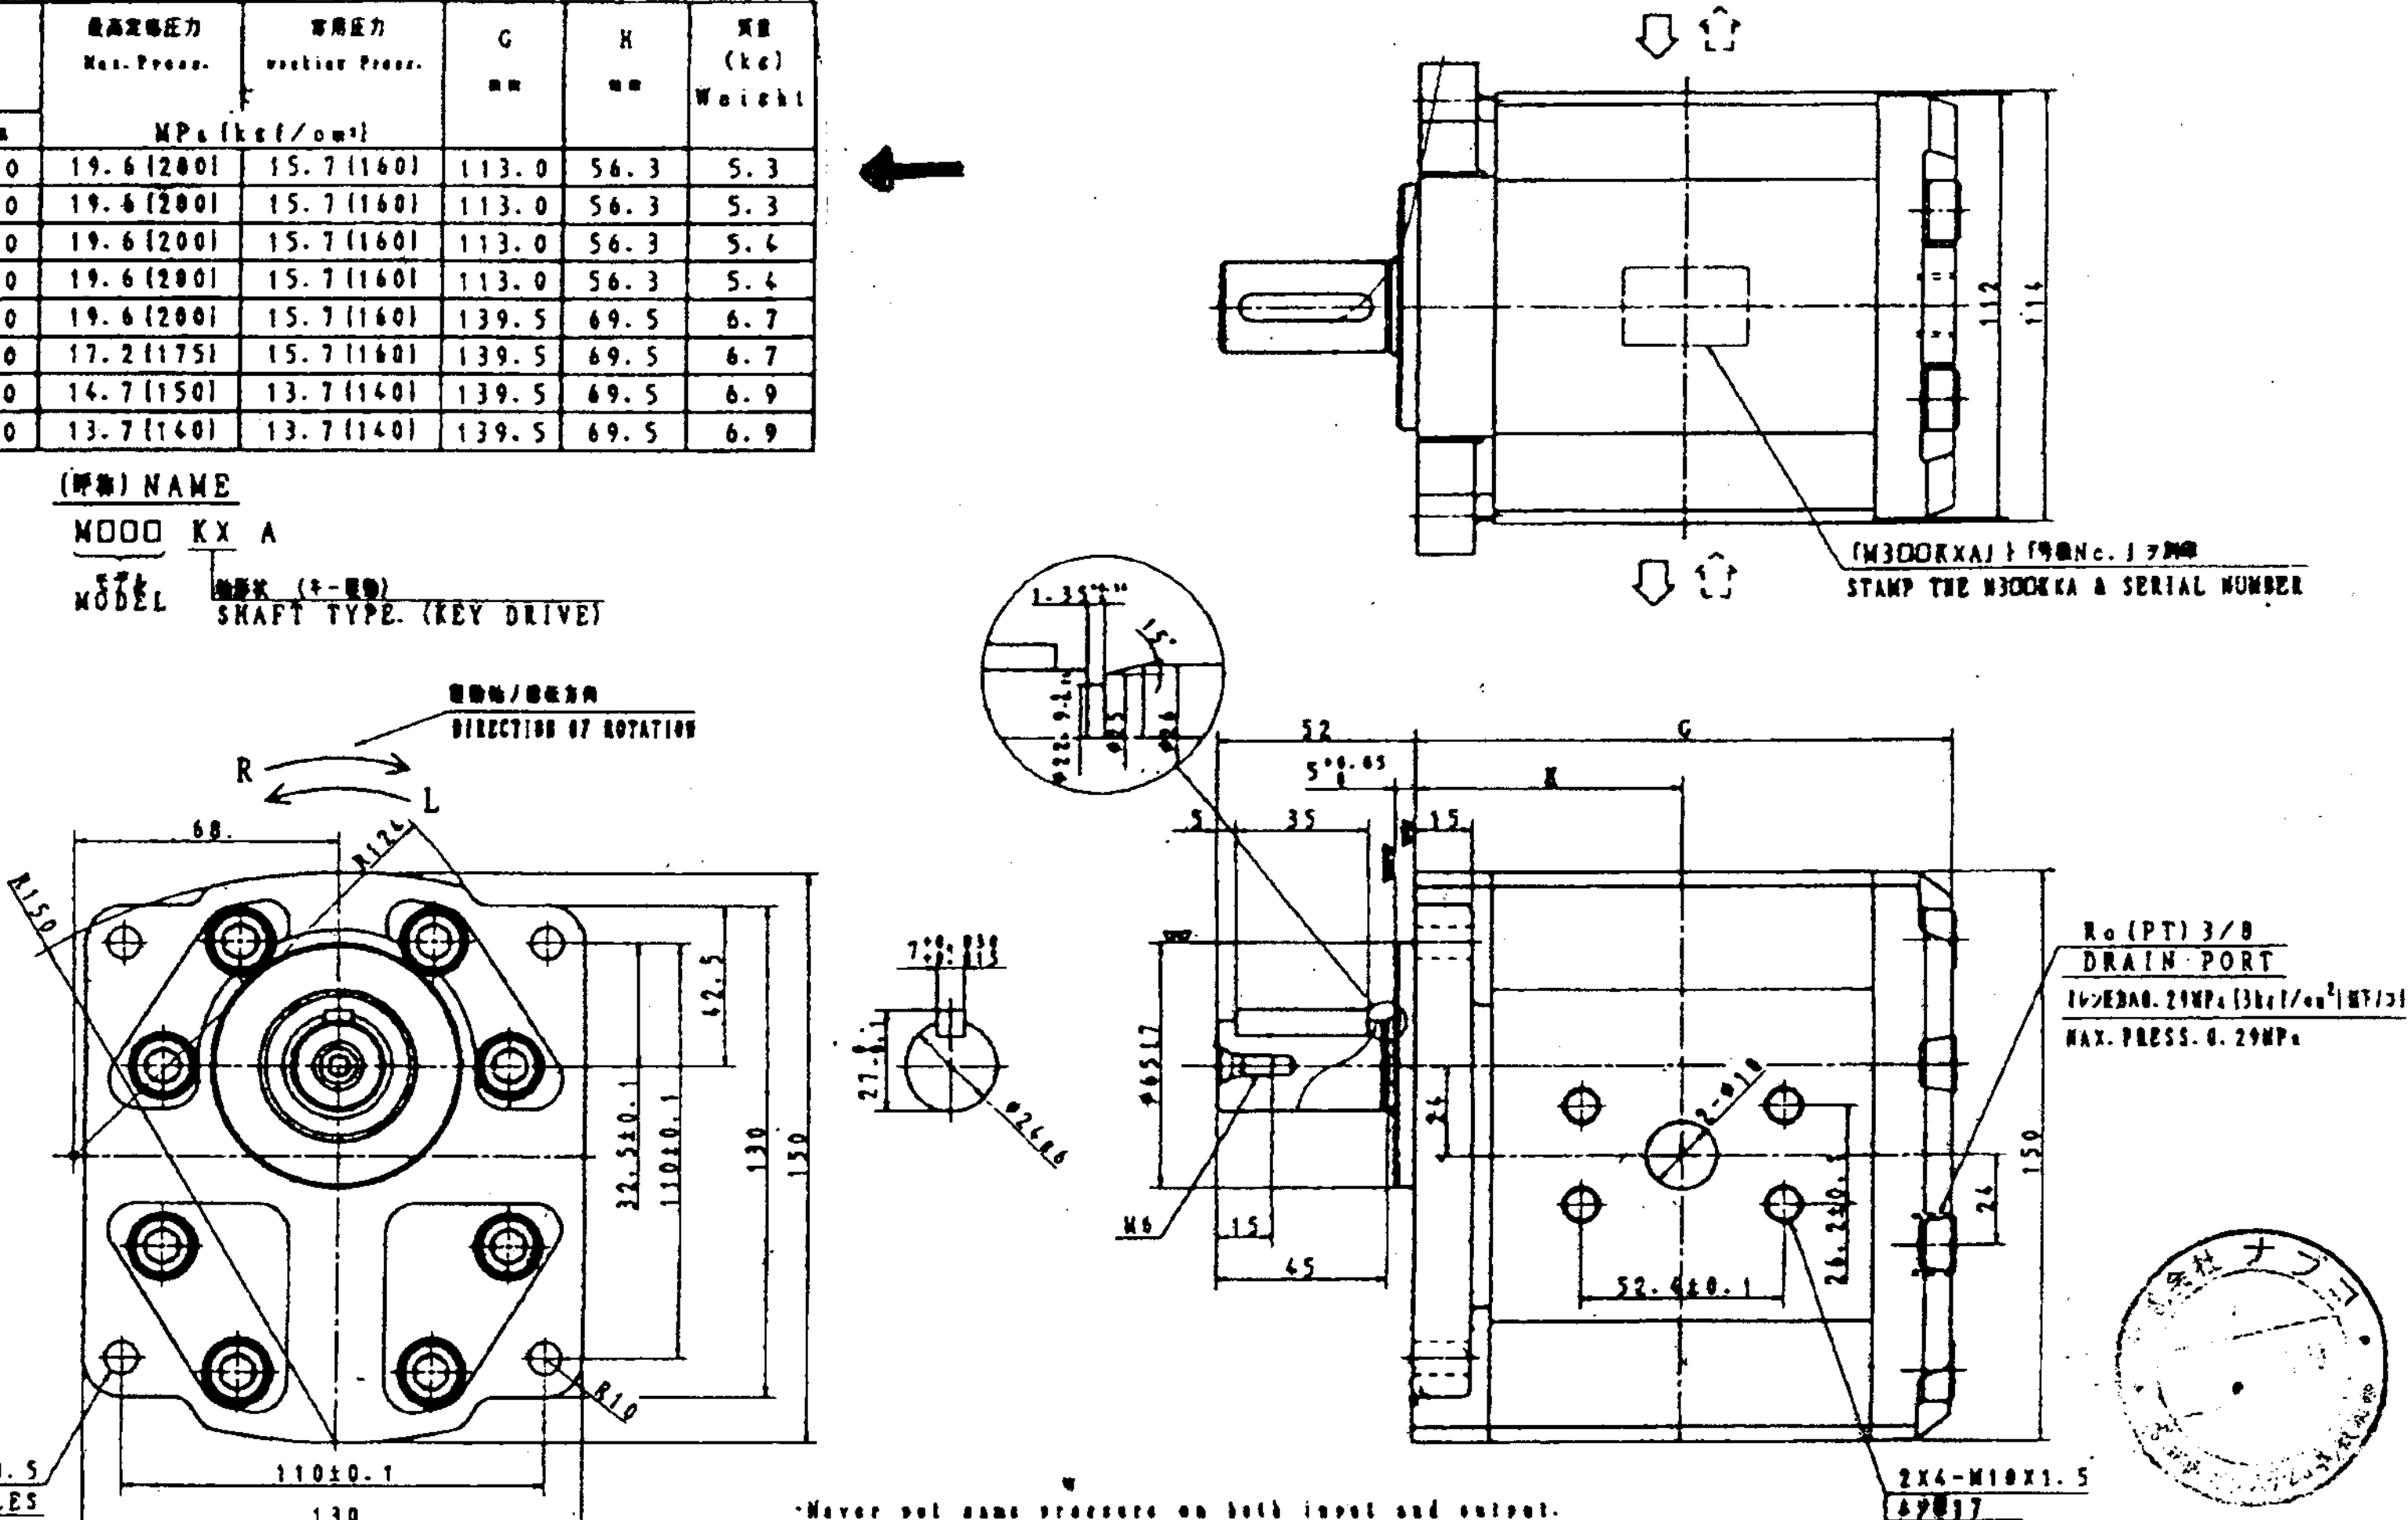

(M300KXA) ト(号機No.) ヲ刻印
STAMP THE M300KXA & SERIAL NUMBER
112
114
回転方向
DIRECTION OF ROTATION
R
L
68.
R124
R150
42.5
32.5±0.1
110±0.1
130
150
R10
4-φ8.5
4HOLES
110±0.1
130
1-35°
15°
φ22.9
52
5
35
15
H
G
15
φ65f7
M6
15
45
7
27.8
φ24h6
Rc(PT)3/8
DRAIN PORT
ドレン圧力0.29MPa(3kgf/cm²)以下ノコト.
MAX. PRESS. 0.29MPa
2-φ18
24
52.4±0.1
26.2±0.1
24
150
2X4-M10X1.5
ネジ深17
2X4-M10X1.5
DEPTH17

・入口、出口ニ同圧力作用サセナイコト。
・使用油温範囲ハ-10℃~80℃ノコト。
・圧力ライン又ハ戻リラインニ濾過精度10μm以下ノフィルター装着ノコト。
・油汚染度NAS10級以内ノコト。
・シリーズ回路ニハ使用シナイコト。
・ベルト・ギヤ等ニヨル横荷重駆動ノ場合ハ、ソノ横荷重ガポンプシャフトニ作用セヌ様、別ニ軸受ケヲ設ケルコト。

・Never put same pressure on both input and output.
・Oil temperature range :-10°C to 80°C.
・Filters of 10μm or below should be mounted in pressure line or return line.
・Contamination level should be controlled with in NAS10 class.
・Nevre use in series circuit
・In case of the overhang drive with belt or gear, install the bearing so that the overhang.

2019469 及ビ、[illegible] 1997.01.48
記事および訂正
質量 WEIGHT 約 kg
型式 KK71654
尺度 SCALE
1/2
1985.10.19
承認 APPROVED
田 辺
担当 DESIGN
大 [illegible]
名称 NAME
M300KXA
ギヤモータ
GEAR MOTOR
外形図
OUTLINE DIMENSIONS
図番 DWG. No.
213-2300-01610-2