

600 Heavy duty/Small radius

Tappeti modulari / Modular belts / Mattenketten

600 Heavy duty/Small radius

Tappeto Modulare Curvilineo Serie 600, H=12,7 M=170
Side Flex Modular Belt Series 600, H=12,7 M=170 / Kurvengängige Mattenkette Serie 600, H=12,7 M=170

CODE STRUCTURE GUIDE

(Example)

5424	03	0425	E
Series	*Material	Width	Version




pg. 260



pg. 464->471

Backflex radius min.: 25 mm

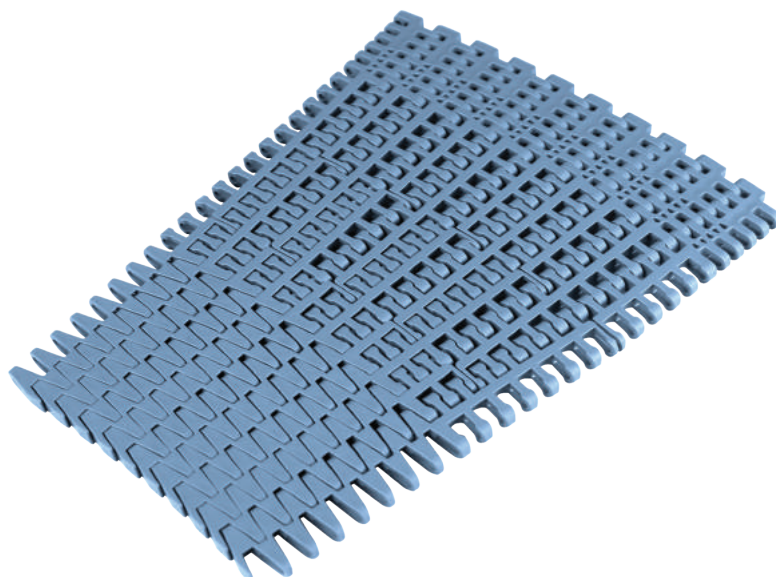

*Material

LFA - Code 01

Low friction Acetal

Max w. load:

Straight 30000 N/m
Curve 3500 N

Weight: 7,5 kg/m²

Temp. range dry: -40÷80 °C

Temp. range wet: -40÷65 °C

Pin material: PBT white

MX - Code 03

Performance PBT

Max w. load:

Straight 24000 N/m
Curve 3000 N

Weight: 7,3 kg/m²

Temp. range dry: -40÷120 °C

Temp. range wet: -40÷60 °C

Pin material: POM grey

DKM - Code 16

Aramide Reinforced Acetal

Max w. load:

Straight 30000 N/m
Curve 3500 N

Weight: 7,5 kg/m²

Temp. range dry: -40÷80 °C

Temp. range wet: -40÷65 °C

Pin material: PBT white

MWX - Code 17

Polyamide Composite

Max w. load:

Straight 30000 N/m
Curve 3500 N

Weight: 7,7 kg/m²

Temp. range dry: -40÷104 °C

Temp. range wet: NR

Pin material: PBT white

MPX - Code 25

Lubricated Acetal

Max w. load:


Straight 30000 N/m
Curve 3500 N

Weight: 7,5 kg/m²


Temp. range dry: -40÷80 °C

Temp. range wet: -40÷65 °C

Pin material: PBT white

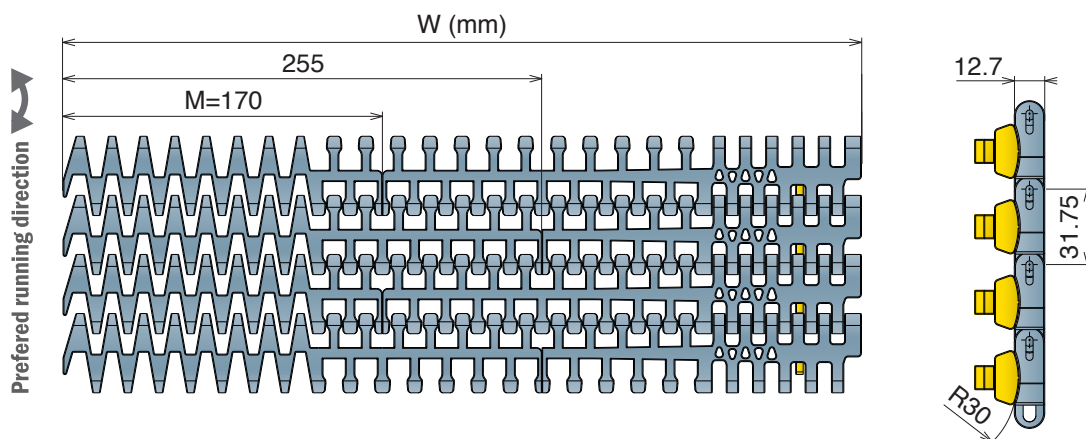

STANDARD



Series	Material	Width	Version	min radius
5424	*	0425	E	500
5424	*	0510	E	600
5424	*	0595	E	720
5424	*	0680	E	880
5424	*	0765	E	1040
5424	*	0850	E	1200

TAB DK Material

