GPP

Version 2 – Level Probe in plastic housing

Electric interface through a factory mounted cord with numbered wires. Case moduled. Protection class IP 68.

- **Connection cable with the length of 3m or as required**
- **Elektrode lenth available 5 to 4000mm (please specify with your order)**
- **1 - 7 elektrodes**
- **All parts which may touch the medium are made from physioligically harmless materials**
- **For conductive filling level acquisition**




Technical data

Mounting method:	Thread	**Probe-head material:**	PPH
Mounting orientation:	any	**Electrode material:**	V4A / 1.4571
Media temperature:	max. 90°C		(optional HAC-C4; Titanium)
Media pressure:	max. 10 bar (+60°C)	**Coating:**	Polyolifin (optional Kynar)
		Sealing ring:	NBR 70

Size	Electrodes	Standard-Model
1/2“	1	GPPE - 1VP2
1/2“	2	GPPE - 2VP2
3/4“	2	GPPF - 2VP2
3/4“	3	GPPF - 3VP2
1“	1	GPPG - 1VP2
1“	2	GPPG - 2VP2
1“	3	GPPG - 3VP2

Size	Electrodes	Standard-Model
1“	4	GPPG - 4VP2
1 1/2“	2	GPPI - 2VP2
1 1/2“	3	GPPI - 3VP2
1 1/2“	4	GPPI - 4VP2
1 1/2“	5	GPPI - 5VP2
1 1/2“	6	GPPI - 6VP2
1 1/2“	7	GPPI - 7VP2

Dimensions

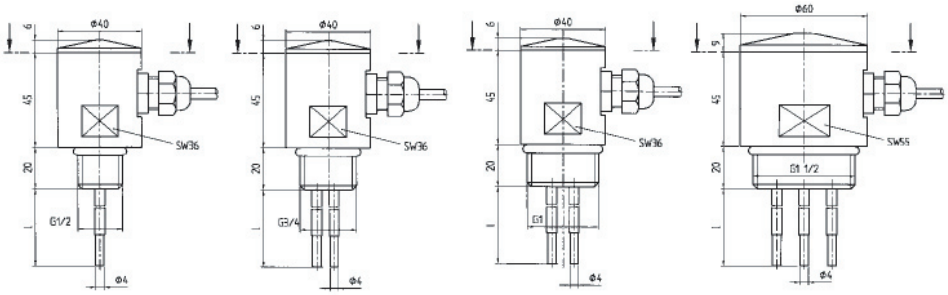

Options

Distance fastener	Material PPH
Lock-nut	Material PPH
Mounting bracket	Material V2A / 1.4301