

BRUSHLESS ELECTRIC ORBITAL SANDER

No external power supply



70x198mm Pad

EMC-B78H
SPEED (o.p.m.): 4,000/7,000/9,000
MOTOR HP: 350W Max. 150W Rated
WEIGHT: 1.445kg (3.18 lbs)
ORBIT: 3mm



Specification:

Model No.	Sander Type	Orbit		Pad Size		Free Speed (o.p.m)	Motor hp (W)	Versions of Voltage AC-in	Length		Weight	
		inch	mm	inch	mm				inch	mm	lbs	kgs
EMN-B78V	Non Vacuum	1/8	3	2.75x7.8	70x198	4,000 7,000 9,000	350W Max 150W Rated	110-120VAC x 60Hz 220-230VAC x 50Hz	13.4	340	3.11	1.415
EMC-B78H	Central Vacuum	1/8	3	2.75x7.8	70x198				13.4	340	3.18	1.445

*H: Hook Pad / V: Vinyl Pad
*Model with "A" at the end is for 110 Vac x 60 Hz



3x4 inch Pad

EMC-B40H
SPEED (o.p.m.): 4,000/7,000/9,000
MOTOR HP: 350W Max. 150W Rated
WEIGHT: 1.095kg (2.4 lbs)
ORBIT: 3mm



Specification:

Model No.	Sander Type	Orbit		Pad Size		Free Speed (o.p.m)	Motor hp (W)	Versions of Voltage AC-in	Length		Weight	
		inch	mm	inch	mm				inch	mm	lbs	kgs
EMN-B40H	Non Vacuum	1/8	3	3x4	76x102	4,000 7,000 9,000	350W Max 150W Rated	110-120VAC x 60Hz 220-230VAC x 50Hz	8	205	2.4	1.095
EMC-B40H	Central Vacuum											

*H: Hook Pad
*Model with "A" at the end is for 110 Vac x 60 Hz

BRUSHLESS ELECTRIC BELT SANDER

No external power supply

Features:

1 Suitable tool for deburring, cleaning, blending and finishing in narrow or hard-to-reach space.



2 Durable idel pulley with rubber cover and brass bearing could attach work-piece fitly when operation.




3 Patent design
With two set installed fans will exhaust dust and cool down tool inside temperature to extend service lifetime.



5 Adjustable variable speed
from 10,000 – 20,000 rpm
(each scale is 1,000rpm)

4 Adjustable angle arm
it is suitable for various working area and condition.

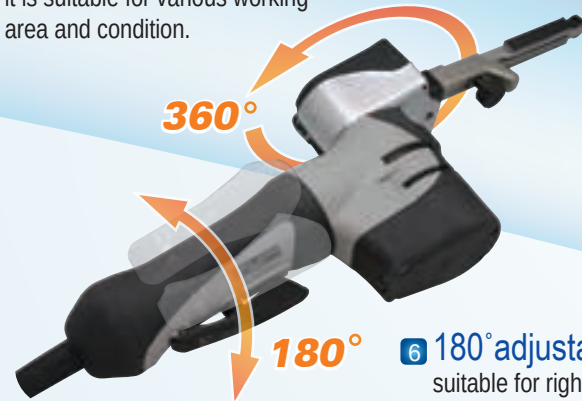

6 180° adjustable holder
suitable for right and left hand operation.

Specification:

Model No.	Belt Size		Belt Size Capacity		Free Speed (r.p.m)	Motor hp (W)	Versions of Voltage AC-in	Length		Weight	
	inch	mm	inch	mm				inch	mm	lbs	kgs
EBS-B457	1/2 x 18	13 x 457	1/8-3/4 x 18-24	3-19 x 457-610	10,000-20,000	350W Max 150W Rated	110-120VAC x 60Hz 220-230VAC x 50Hz	16.3	415	3.02	1.37

SUMAKE NORTH AMERICA
10 Northern Blvd
Unit 13
Amherst, NH 03031
P: 603 402-9952
info@sumakenorthamerica.com

BRUSHLESS ELECTRIC SANDER
NO EXTERNAL POWER SUPPLY



SUMAKE®
MAKE JOBS BETTER THAN EVER

POWERFUL, QUIET AND SMOOTH HANDLING!!

Features:


- Energy saving- Normally air sander will need at least 3HP (about 1200W) air compressor; compare with electric sander only consumes 150W.
- Easy carrying & external power supply free.
- Significant energy and cost saving vs pneumatic sander.
- Less maintenance demand and more durable.



5 Friendly Speed Control
User-friendly speed control design with various speed settings: 4000rpm/7000rpm/9000rpm/10000rpm. Start speed at 4000 rpm.



6 Ergonomic hand wrist design
Ergonomic hand wrist design provides better user experience. With inserted cable to avoid sander drop off accidentally.

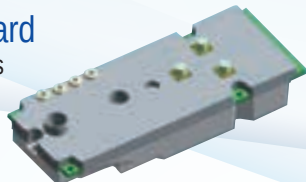

7 Sealed Circuit Board
Sealed circuit board locks dust & moisture out.



8 Patented Dual-Channels
Patented dual-channels vacuum design enhances vacuum efficiency.

1 Flexible lever
Flexible lever adjustment provide ideal speed control.

2 Comfort Grip & low profile
Comfort grip absorbs vibration and reduces hand fatigue. Innovative low profile for less counterforce.

4 Patented Cooling System
Patented fan blade cooling system to extend service life.

3 Brushless DC Motor
Outstanding brushless DC motor generates 350W force with high torque. Closed motor design prevents dust-stained for life extension.

BRUSHLESS ELECTRIC RANDOM ORBITAL SANDER

No external power supply



6 inch Pad

ELSC-B60H
SPEED (r.p.m.): 4,000/7,000/9,000/10,000
MOTOR HP: 350W Max. 150W Rated
WEIGHT: 1.21kg(2.6 lb.)



5 inch Pad

ELSC-B50H
SPEED (r.p.m.): 4,000/7,000/9,000/10,000
MOTOR HP: 350W Max. 150W Rated
WEIGHT: 1.08kg(2.4 lb.)



3 inch Pad

ELSC-B30H
SPEED (r.p.m.): 4,000/7,000/9,000/10,000
MOTOR HP: 350W Max. 150W Rated
WEIGHT: 0.975kg(2.14 lb.)

Specification:

Model No.	Sander Type	Orbit		Pad Size		Free Speed (r.p.m)	Motor hp (W)	Versions of Voltage AC-in	Length		Weight	
		inch	mm	inch	mm				inch	mm	lbs	kgs
ELSN-B30H-2.5	Non Vacuum	3/32	2.5	3	76	4,000 7,000 9,000 10,000	350W Max 150W Rated	110-120VAC x 60Hz	8.32	221	2.14	0.975
ELSN-B30H		3/16	5.0	3	76				8.32	221	2.14	0.975
ELSN-B50H(V)-2.5		3/32	2.5	5	127				10.9	278	2.4	1.08
ELSN-B50H(V)		3/16	5.0	5	127				10.9	278	2.4	1.08
ELSN-B60H(V)-2.5		3/32	2.5	6	152				11.9	303	2.6	1.21
ELSN-B60H(V)		3/16	5.0	6	152				11.9	303	2.6	1.21
ELSC-B30H-2.5	Central Vacuum	3/32	2.5	3	76			220-230VAC x 50Hz	8.32	221	2.14	0.975
ELSC-B30H		3/16	5.0	3	76				8.32	221	2.14	0.975
ELSC-B50H(HM)(V)-2.5		3/32	2.5	5	127				10.9	278	2.4	1.08
ELSC-B50H(HM)(V)		3/16	5.0	5	127				10.9	278	2.4	1.08
ELSC-B60H(HM)(V)-2.5		3/32	2.5	6	152				11.9	303	2.6	1.21
ELSC-B60H(HM)(V)		3/16	5.0	6	152				11.9	303	2.6	1.21

*H: Hook Pad / HM: Multihole Hook Pad / V: Vinyl Pad
*Model with "A" at the end is for 110 Vac x 60 Hz

