pewag BW Transition link

Versatile by default.

This link is versatile. It can be used as a transition and as an end link in welded systems. The flattened section opens up universal connection possibilities. The CE-marking and BG-approval ensure flawless quality. This transition link is manufactured according to EN 1677-4 with mechanical values according to G10 and is supplied with a full operating manual, offering users outstanding versatility at the highest level.

BW Transition link

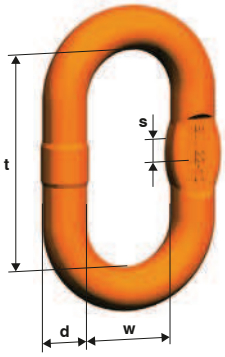

Code	Load capacity 0°-45° [kg]	d [mm]	t [mm]	w [mm]	s [mm]	Weight [kg/pc.]	Transition link for chain Ø I- + II-leg BW I/II
BW 7	1,000	7	36	16	-	0.03	5
BW 8 [1)]	1,400	8	36	16	-	0.05	6
BW 9	1,900	9	44	20	-	0.07	7
BW 10	2,500	10	44	20	-	0.09	8
BW 13	4,000	13	54	25	10	0.17	10
BW 16	6,700	17	70	34	14	0.39	13
BW 20	10,000	20	85	40	14	1.00	16
BW 22	12,500	23	115	50	17	1.16	-
BW 23 [1)]	14,000	23	115	45	17	1.16	19
BW 26	16,200	27	140	65	20	1.92	-
BW 27 [1)]	19,000	27	140	55	20	1.92	22
BW 32	26,500	33	150	70	26	3.16	26
BW 36	31,000	36	170	75	-	4.35	-
BW 40	40,400	40	170	80	-	4.12	32
BW 45 [1)]	42,400	45	170	80	-	7.15	-
BW 50	64,000	50	200	100	-	10.58	-

[1)] Only in welded systems.

For chain sling load capacities, please refer to the table "pewag winner load capacities".