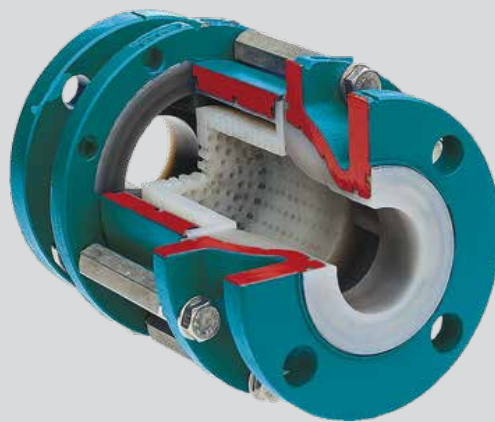


Type DELTA-SF Type BASKET Lined Strainers

- exchangeable filter basket
- PFA/FEP Lining (minimum thickness ≥ 3 mm), only fresh granulate used, no refurbished regenerates



Type BASKET



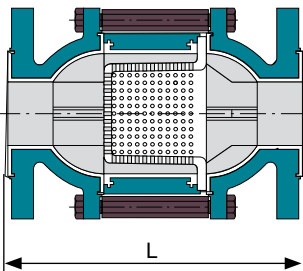
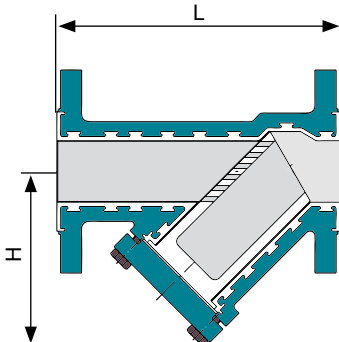
Type DELTA-SF

- chemical-resistant
- $T_{\max}$ 150°C
- 3 mm mesh width, other on request
- filter basket made of PFA / FEP separately available
- Standard material: Ductile cast iron, other on request

5.3.1 Type DELTA-SF Type BASKET

DN 15 - 250 / PN 10-40
NPS ½ - 4 / Class 150

Technical Informations

Type BASKET T_{max} 150°C 				Type DELTA-SF T_{max} 150°C 				
EN 558-1	DN	PN**	L [mm]	EN 558-1	DN	PN**	L [mm]	H [mm]
	15	10-40	130		15	10-40	130	100
	20	10-40	150		20	10-40	150	100
	25	10-40	160		25	10-40	160	10
	32	10-40	180		32	10-40	180	*
	40	10-40	200		40	10-40	200	120
	50	10-40	230		50	10-40	230	160
	65	10-40	290		65	10-40	290	*
	80	10-40	310		80	10-40	310	185
	100	10/16	350		100	10-40	350	220
150	10/16	350	150	10-40	350	380		
200	10/16/25	400						
250	10/16/25	450						
ASME B 16.5	NPS	Class**	L [mm]	ASME B 16.5	NPS	Class**	L [mm]	H [mm]
	1	150	160		1"	150	127	100
	1½	150	*		1½"	150	*	*
	2	150	230		2"	150	178	150
	3	150	310		3"	150	203	200
4	150	350	4"	150	229	230		
Features	- exchangeable filter basket - low pressure drops low area corresponds to size of nominal bore - with Borosilikat tubular sightglass on request			Features	- easy and quick exchange of strainer - with Borosilikat sightglass on request			

* on request

** higher operating pressures on request

Order example: F-2-BASKET-DN80-PN10-Ductile cast iron-PFA

F = flange, 2 = two-way, BASKET = type, DN80 = DN80 = nominal size, PN10 = operating pressure, Ductile cast iron = body material, PFA = lining and strainer material

AZ Armaturen GmbH
Waldstrasse 7
D-78087 Mönchweiler
Telefon: 0049 / 7721 / 7504-0
sales@az-armaturen.com
www.az-armaturen.com