

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

CASE ASSEMBLY: SEALED, CONFORMS TO IP65.
DIAL: YELLOW CHARACTERS, BLACK BACKGROUND.

POINTER: YELLOW

LENS: GLASS

CASE: ALUMINUM, PAINTED ASA 70 LIGHT GRAY EPOXY


FLANGE: ALUMINUM

FLOAT ROD: BRASS


SUPPORT TUBE: BRASS

ALL ANGULAR DEGREES SHOWN REFLECT FLOAT ROD TRAVEL.

INSULATION TEST: 1500V TO GROUND FOR 60 SECONDS
FLOAT ROD: MUST EXTEND FROM COUNTERBORED SIDE OF SHAFT
FLOAT LEADS POINTER BY 0".

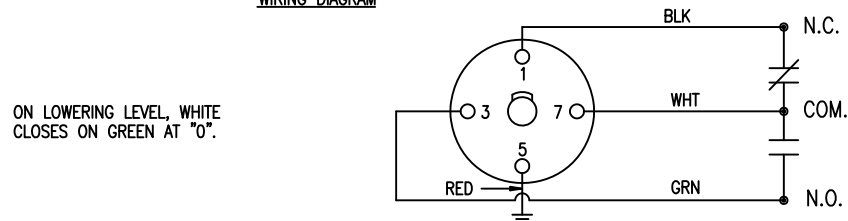

ON LOWERING LEVEL, WHITE
CLOSES ON GREEN AT "0".

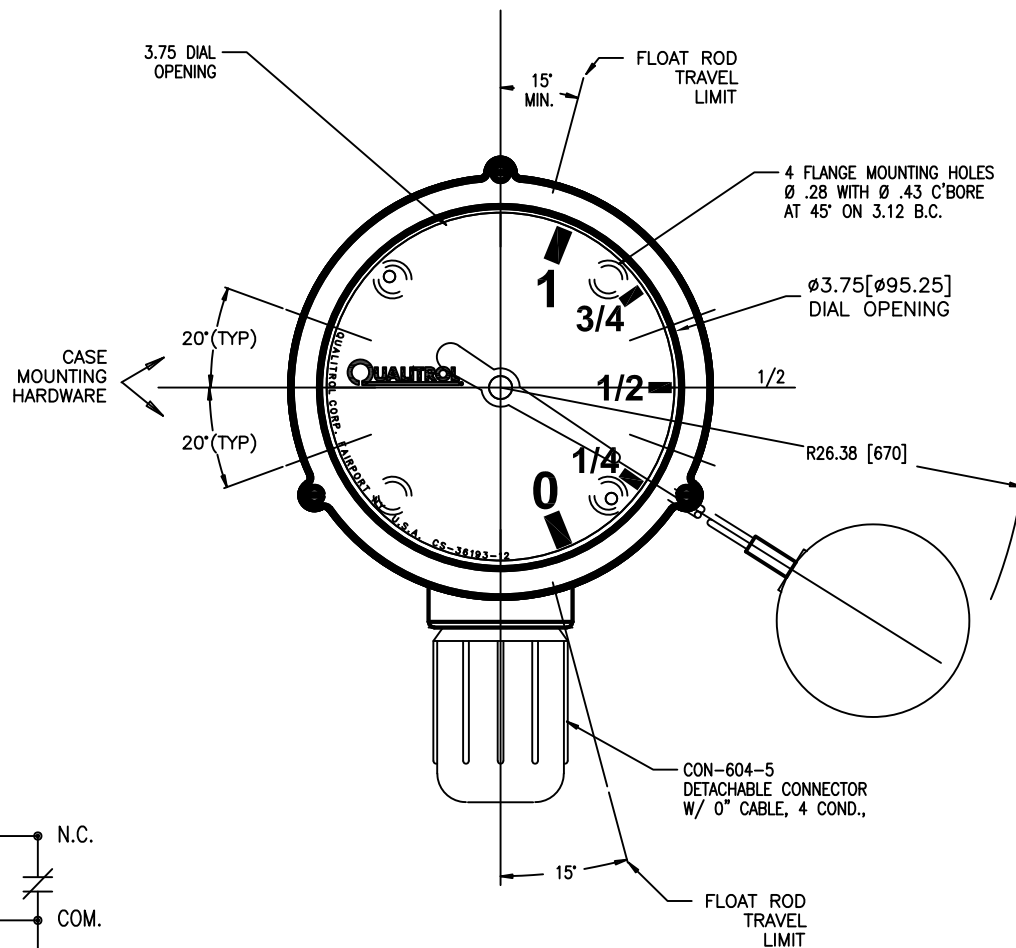

SWITCH RATING:
 15A @ 125, 250, 480 VAC
 1/2A @ 125 VDC } NON INDUCTIVE
 1/4A @ 250 VDC }

SHOWN LOOKING AT MALE INSULATOR ASSEMBLY FROM OUTSIDE OF CASE

—	24-Oct-22	ADDED ADP-250-1 TO FLOAT ROD	43217
—	10/28/21	UPDATE CAS/BEZ TO IP65	38143
—	01-04-05	RELEASED	24903
LET	DATE	ALTERATION	C.N.

QUALITROL®

DIMENSIONS AND TOLERANCES IN
ACCORDANCE WITH ASME Y14.5M-1994

PH. (585) 586-1515
FAX (585) 377-0220

1385 FAIRPORT ROAD
FAIRPORT NY 14450

FORM 0-473 REV. F 04/06/06

TITLE: 3.5" LIQUID LEVEL GAGE

MODEL NO. 035-039-01 CS-36193