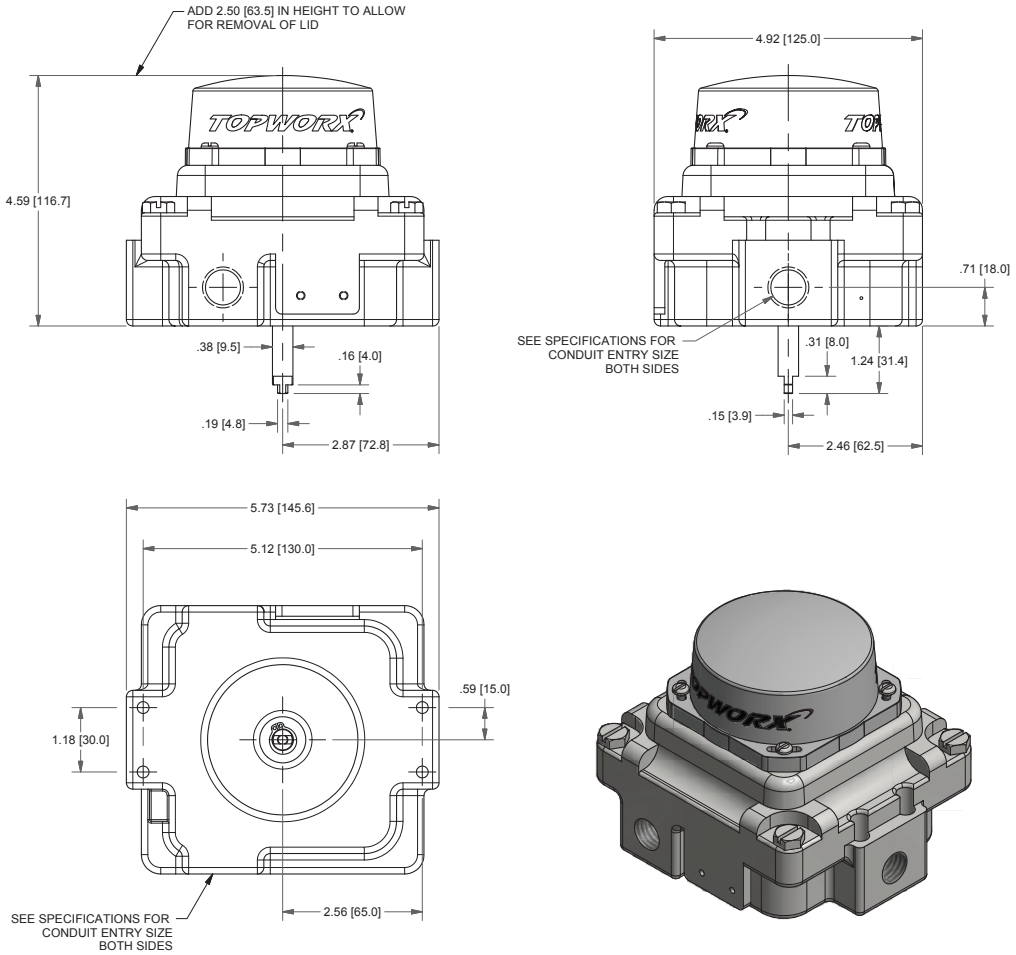


MODEL NUMBER

TXP-E21GLEM


PRODUCT LINE

Switchbox TXP and TXS

SPECIFICATIONS

Enclosure	Tropicalized Aluminum
Bus/Sensor	(2) p+f NJ2+V3-N inductive NAMUR
Area Classification	Explosion Proof
Visual Display	Standard 90° Green OPEN, Red CLOSED
Shaft	1" Extended Linear Shaft
Conduit Entries	(2) 3/4" NPT
O-Rings	Silicone
Pilot	No pilot option
Spool Valve	No spool valve option
Valve Cv	No valve Cv option
Manual Override	No manual override option
Regional Certification	No regional cert option
N Switch	No N Switch

WIRING DIAGRAM

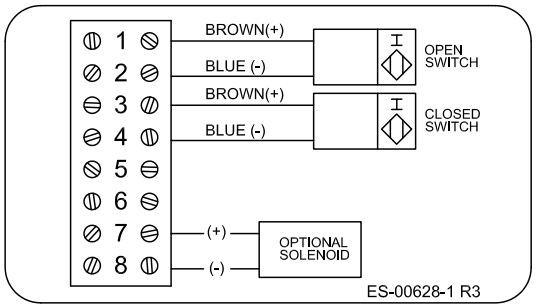

NAMEPLATE

2813 II 2 GD

CERTIFIED E125326 SAFETY US-CA


TELEMETERING EQUIP. FOR HAZ. LOC.

Cl I Div 1, Grps C-D; Cl II Div 1, Grps E-G; -50°C ≤ Ta ≤ 60°C; Type 4
Ex db IIC T6/T4 Gb; -65°C ≤ Ta ≤ 40°C/80°C
Ex tb IIIC T85°C/T135°C Db; -50°C ≤ Ta ≤ 40°C/80°C; IP66/67
Sira 04ATEX1218X IECEx SIR 06.0054X
Lead seal required within 18 inches of enclosure
SWITCH: 3mA @ 8VDC NAMUR Output

TopWorx
3300 Fern Valley Road
Louisville, KY 40213 USA
www.topworx.com

Model #:

Serial #:

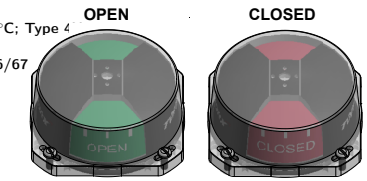

Current as of March 20, 2020 – Subject to change without notice.

TOPWORX
3300 Fern Valley Road
Louisville, KY 40213
(502)969-8000 PH
(502)969-5911 FAX
www.topworx.com