

Request form for specific cam switch

YOUR DETAILS

Company: WARTSILA		Address:	
Name and surname:		Tel:	
		Fax:	

> APPLICATION Fill in one form for each type of switch

- ☐ Load switching
☐ resistive
☐ electromagnetic

- ☒ Control of motors
☐ Starting / Switching off a running motor

Rated voltage **690 VAC** AC/DC
 Rated current **21 AMP** A

☐ Reverse direction of rotation
 Motor rating **21 AMPS, 4 kW** A / CV / kW

> DIAGRAM

Fill in the grid below by **copying and pasting** the appropriate symbols

- ☒ Closed contact
☒ Closed contact,
 2 positions
 without cut-off
☒ Overlapping :
☒ second contact
 closes before first
 contact opens
 (not possible with
 30° switching angle)
☒ Impulse contact,
 closes momentarily
 when switching
 from one position to next
 Spring return

Contact Nos.	Position No.												Terminals connection and links	
	1	2	3	4	5	6	7	8	9	10	11	12		
1-2	x	x											☒ 1	☒ 3
3-4			x	x									☒ 2	☒ 4
5-6					x	x							☒ 5	☒ 7
7-8							x	x					☒ 6	☒ 8
9-10													☐ 9	☐ 11
11-12													☐ 10	☐ 12
13-14													☐ 13	☐ 15
15-16													☐ 14	☐ 16
17-18													☐ 17	☐ 19
19-20													☐ 18	☐ 20
21-22													☐ 21	☐ 23
23-24													☐ 22	☐ 24
25-26													☐ 25	☐ 27
27-28													☐ 26	☐ 28
29-30													☐ 29	☐ 31
31-32													☐ 30	☐ 32
33-34													☐ 33	☐ 35
35-36													☐ 34	☐ 36
37-38													☐ 37	☐ 39
39-40													☐ 38	☐ 40
41-42													☐ 41	☐ 43
43-44													☐ 42	☐ 44
45-46													☐ 45	☐ 47
47-48													☐ 46	☐ 48

> SWITCHING ANGLE

Position in boxes

- ☒ 90°
☐ 60°
☐ 45°
☐ 30°

One-way rotation

- ☒ right
- ☒ left

Blocking-off between and position

> STANDARD PRESENTATION

- ☐ Handle
- ☐ small
- ☒ medium
- ☐ large

- ☒ Colour

 - ☒ grey
 - ☐ black
 - ☐ red

- ☐ With key
- ☐ 455
 - ☐ 1424 A
 - ☐ other

- ☐ Lever
☐ small
☐ large

- ☒ Selector switch style handle

> LEGEND PLATE AND ENGRAVING

Choice of legend plate

- ☒ 48
☐ 64
☐ 72
☐ 96

- ☐ Alu
☒ Black
☐ Red
☐ Yellow

> MOUNTING

- ☒ Front
☐ Rear
☐ Enclosure
☐ One-hole
☐ DIN Rail

> PADLOCKABLE PRESENTATION

Colour

- ☐ yellow / red
☒ grey

Size

- ☒ 48
☐ 72
☐ 96

> SWITCHING ANGLE

- ☐ Engraving (use box to specify your engravings)
- ☒ linear
- ☐ polygonal

-  Duty label
(2 x 13 characters)

A, 0, 1, S


ENGRAVING

[illegible]

> OPTIONS

- ☐ Foolproof handle
- ☐ IP rating
 - ☒ IP 40 (standard)
 - ☐ IP 55
 - ☐ IP 65
- ☒ Terminal covers
- ☐ Tropicalised version

> MARKING OF POSITIONS

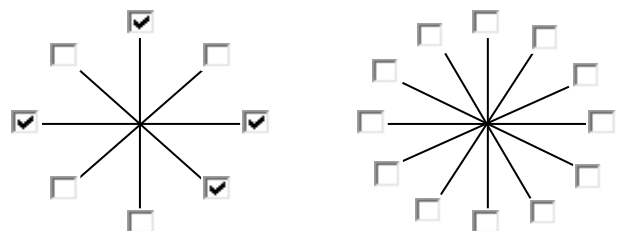

COMMENTS