



**PRODUCT SPECIFICATION
APPROVAL SHEET**

產品規格承認書

Customer (客戶): _____
Description (規格): AC FAN
Model No (型號): SJ1238HA2 (BAT)
Sample Issue Date(送樣日期): _____
Edition (版本): S4GC--2018A

CONFIRMATION SIGNATURE 客戶承認欄	SAN JU SIGNATURE 三巨確認欄		
Please confirm your acceptance of this approval sheet by return fax. 本承认书内容若贵司确认无误, 请于上方承认栏内签章寄回.	APPD. 核准	EDAM. 審核	DRAW. 制表
		Jack Hu	蒙仁彪 2018-11-20

深圳三巨電機有限公司
SAN JUN Electric Machinery CO.,LTD.

TEL: 0755-28035670/28035671/2805672
FAX: 0755-27993156

PRODUCT SPECIFICATION
APPROVAL SHEET

產品規格承認書

一、 Sample Specification(樣品規格):

Item(項目)		Specification/Condition(規格/條件)	
01	Part No.(型號)	SJ1238HA2	
02	Outline Dimension(外形尺寸)	120*120*38mm	
03	Rated Voltage(額定電壓)	AC 230V	
04	Voltage Range(電壓範圍)	AC 160V~250V	
05	Frequency(頻率)	50Hz	
06	Rated Current(額定電流)	0.12A ±10%	25℃ 60~80%RH
07	Power Consumption(消耗功率)	19W ±10%	25℃ 60~80%RH
08	Speed(轉速)	2600RPM ±10%	25℃ 60~80%RH
09	Max. Air flow(最大風量)	84CFM ±10%	25℃ 60~80%RH Rated Current(額定電流)
10	Max. Static Pressure(最大靜壓)	0.28Inch-H ₂ O	
11	Noise Level(噪音)	45dB(A)	
12	Weight（重量）	470g	
13	Number per box（每箱个数）	40pcs	

二、 Electrical Specification(電氣規格):

Item(項目)		Specification/Condition(規格/條件)
01	Dielectric Strength (絕緣耐壓)	1500V/0.5mA/2s
02	Insulation Resistance (絕緣阻抗)	100 Meg Ohm Min. at 500VDC
03	Motor Protection(电机保护类型)	Impedance Protected
04	Temperature Test of Run (運轉溫升)	$\Delta T \leq 70K$ Rated Voltage(額定電壓)
05	Locked Rotor Protection (鎖定檢測)	$\Delta T \leq 130K$ Rated Voltage(額定電壓)

三、 Safety Approvals(安規情況):

Safety Approvals (安規)	File No (安規編號)	Safety Approvals (安規)	File No (安規編號)
UL	E314698	RoHS-TUV	64.165.18.05125.01
CUL	E314698	CCC	2010010401416987
TUV	R09654397	CE--LVD	N8A150268837008
TUV-EMC	E8A150268837009	C-Tick	N/A

TEL: 0755-28035670/28035671/2805672

FAX: 0755-27993156


四、 Environmental Specification(環境條件):

Item(項目)		Specification/Condition(規格/條件)
01	Operating Temp. Range (工作溫/濕度範圍)	Temperature/溫度： -20℃~70℃ Humidity/濕度： 20%~85%RH
02	Storage Temperature (保存溫/濕度範圍)	Temperature/溫度： -20℃~85℃ Humidity/濕度： 20%~95%RH
03	Life (壽命)	40000H (At40℃)

五、 Main Materials/Parts Specification(主要材料/零件規格):


Item(項目)		Specification(規格)
01	Blade(扇葉)	PBT+15%GF UL 94 V-0
02	Frame(框架)	Aluminum ADC-12,Painted Black
03	Stator& Rotor (定子与转子)	H-23 & H-60
04	Magnet Wires(漆包線)	Copper 2 FUEW
05	Bobbin(絕緣套)	PA-66 UL 94 V-0

六、 Label Marking(商標說明):

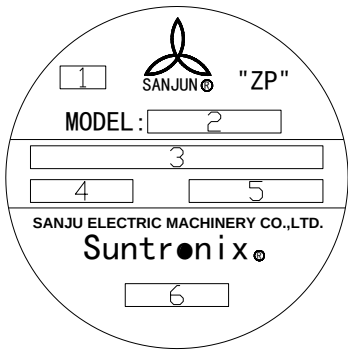

Ordinal (序號)	Explain (說明)	Content (內容)
1	Bearing(軸承形式)	Ball
2	Model(型號)	SJ1238HA2
3	Specification(規格)	220-240V~AC 50/60Hz 0.13A
4	Protect(保護形式)	IMPEDANCE PROTECTED
5	Number(編號)	*****
6	Safety Approvals (安規)	UL TUV CE ROHS

Model Explain(型號說明):

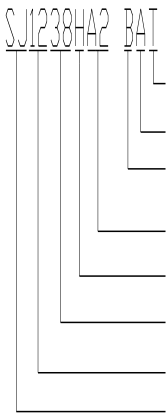

Connector Type(出线方式): L-Lead Wire (引线), T-Two Terminal(端子);

Frame Material(框体材质): A-Aluminum in Black(铝合金), P-Plastic in Black(塑料);

Bearing Type(培林类型): B-Ball Bearing(滾珠轴承), S-Sleeve Bearing(含油轴承);

Rated Voltage(额定电压): A1/D1-120VAC/12VDC, A2/D2-220VAC/24VDC, A3-380VAC, D4-48VDC;


Motor Speed(马达转速): H-High Speed(高转), M-Middle Speed(中转), L-Low Speed(低转);

Frame Thickness(框架厚度): 38mm;

Square Frame(方形框架): 120mm*120mm;

Company Code(公司代码): SJ-SANJU (三巨)。

七、 Outline Dimension(外觀尺寸圖)：

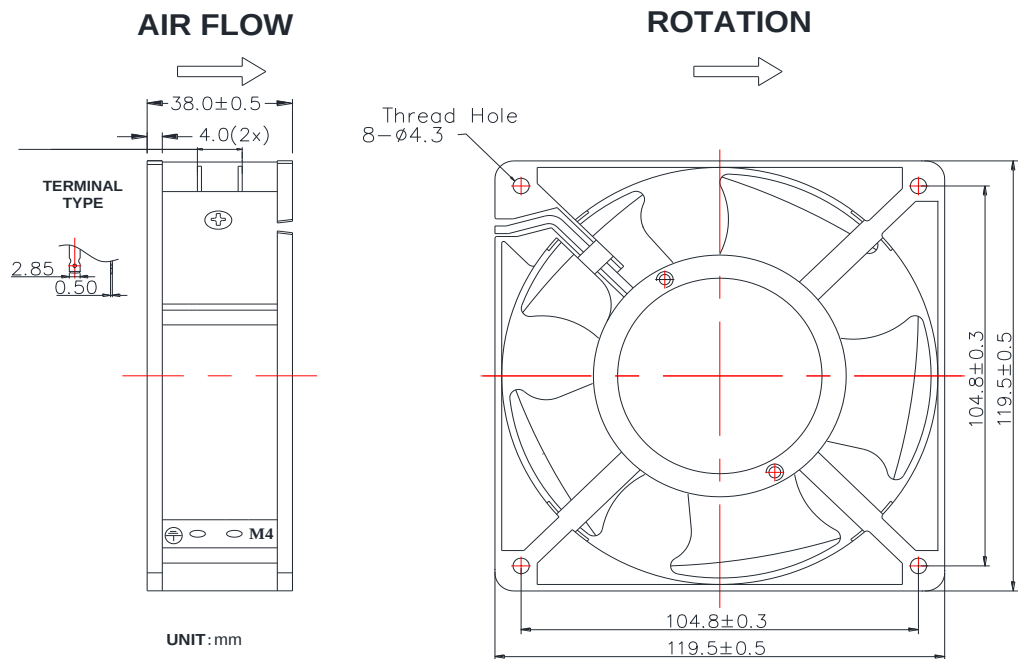

八、 Property(特性圖):

