



officine  
orobiche

Quantity 16

Model CV40.JL.2L.2M6.WP.XX

Tag

s1  
s2  
s3  
s4  
s5

s6  
s7  
s8  
s9  
s10

s11  
s12  
s13  
s14  
s15

s16  
s17  
s18  
s19  
s20

01 Body mat. SS 316L  
02 Connections 1.1/2" NPTF  
03 Float SS 316L  
04 Magnetic sleeve SS 430  
05 Flow indicator NO

21 Body rating  
22 Max press. 10 barg  
23 Max temp. 20 °C  
24  
25 Fluid H2O

06 Housing SS 316 Ti WP IP 66  
07  
08 Area Classi .

26 Nominal flow 5 m3/h  
27 Range 1---2.5 m3/h  
28 Set ( min) 1,98 m3/h  
29 Differential 1,5 m3/h  
30 Normal flow 5 m3/h  
31 Adjust.(min) on site  
32 Scale .

09 Electric connection 1/2 " NPTF  
10 Switch groups 1  
11 Microswitch M6 ( gold plated )  
12 Contact DPDT ( 24 V DC 1 A )


13 Connector  
14 Cable gland  
15 Fins  
16 Label SS 316  
17 Paint

33  
34  
35  
36  
37 Nace NO

18 Well pipe SS 316L  
19 Internal parts SS 316L  
20 Antisteam

38 Cone mat. SS 316L  
39  
40

v1  
v2  
v3  
v4  
v5  
n1  
n2  
n3  
n4

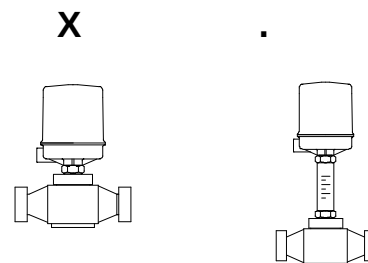

gen-20

Issued UV.....date

Approved UT.....date