
Easy Touch Control ETC5000

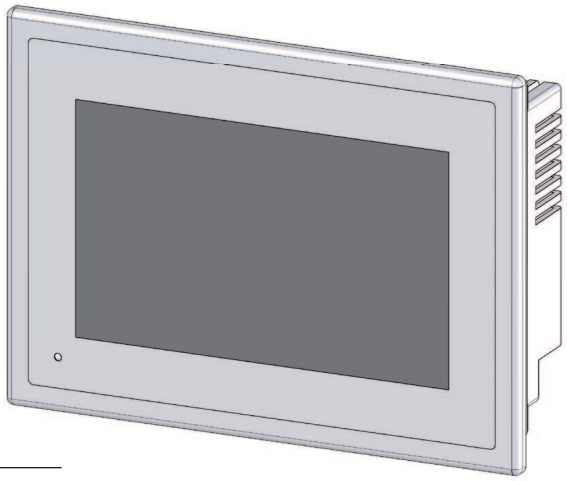


Features:

- Control system for Position Indicators and Actuators
- Intuitive touchscreen user interface for quick size changeover
- Up to 31 devices can be controlled
- Individual or block positioning
- RS485 und USB Interface

Features	Order text			Additional information
Display diagonal	7	A	7 inch	
Protection	IP65	B	front	
Interface/protocol	S3/09	C	RS485 / SIKONETZ5	
Software	S	D		standard

Your ordering: ETC5000 – [ ] – [ ] – [ ] – [ ]
A B C D

Easy Touch Control ETC5000

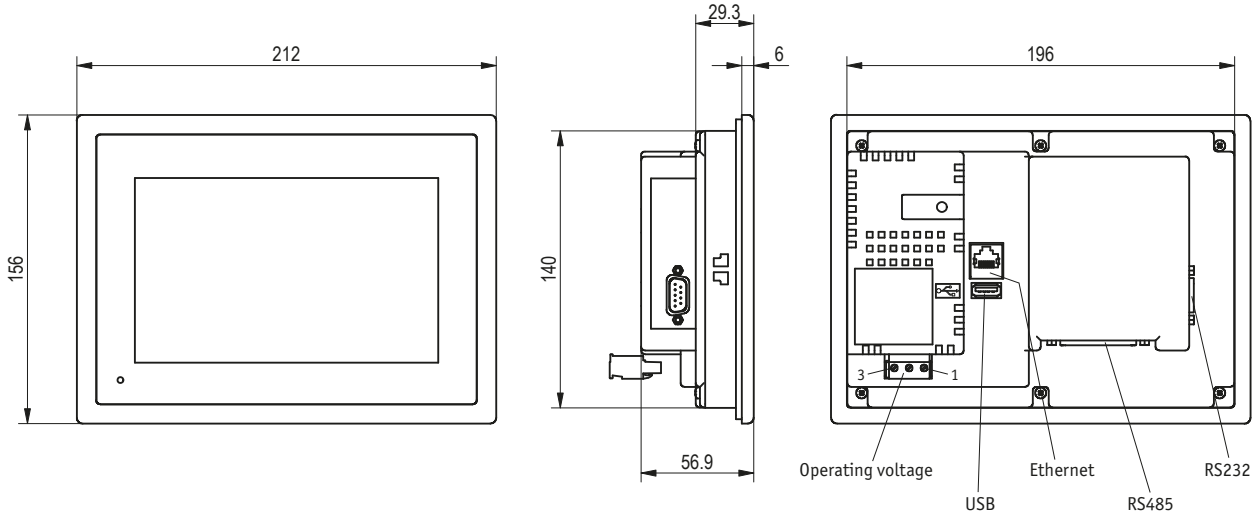

Pin assignment Operating voltage


Pin	Designation
1	+UB
2	GND
3	PE


Pin assignment RS485

Pin	Designation
1	GND
7	GND
12	DÜA
13	DÜB
21	+5 V Out (for level setting)
2-6, 8, 14-20, 22, 24, 25	do not connect
9-11, 16, 17, 23	N.C.

Pin assignment RS232

Pin	Designation
1	DCD
2	RD
3	TD
4	DTR
5	SG
6	DSR
7	RTS
8	CTS
9	RI





Technical Data			Additional information
Mechanical Data:			
Housing		plastic	
Weight		1,3 kg	
Electrical data:			
Operating voltage		11 ... 36 V DC	
Power consumption		12 W	
Display		7", TFT wide touch screen	resolution 800 x 480
Colors		65536	
Background lighting		LED	
Ambient conditions:			
Operating temperature		0 ... +50 °C	
Storage temperature		-20 ... +60 °C	
Relative humidity		10 % ... 90 %	condensation not permitted
Protection category		IP65 front, IP20 housing	EN 60529
Shock resistance		15 g / 11ms	
Vibration resistance		9 ... 150 Hz; 9,8 m/s^2 X, Y & Z	
Accessory	KA485ETC	Adapter RS485	