





10A

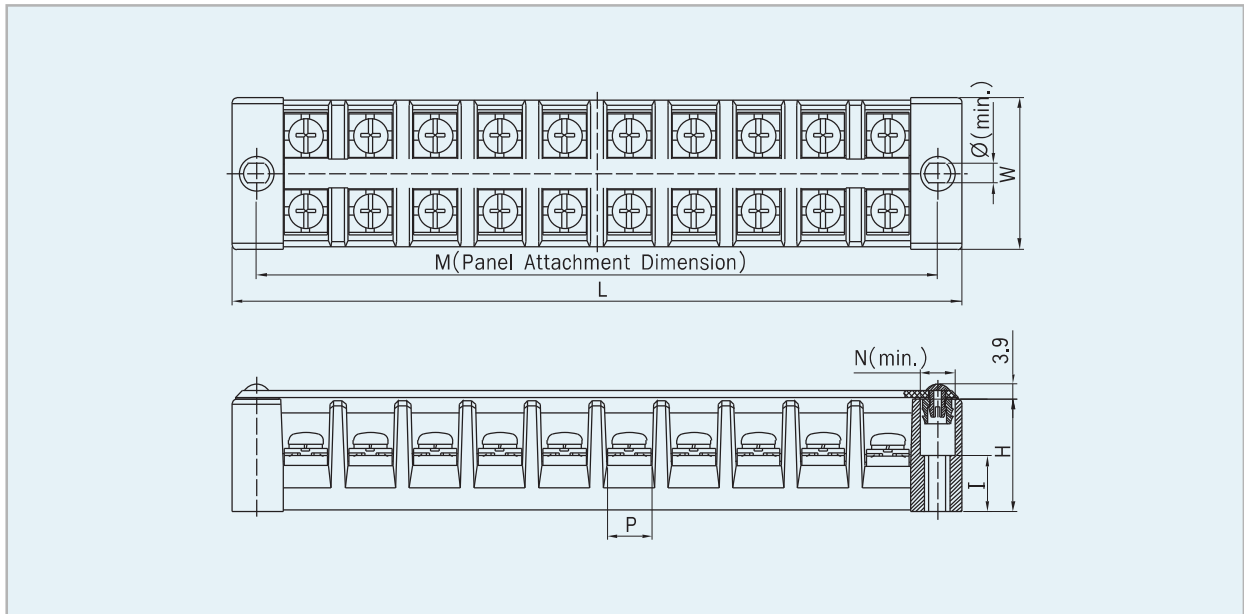


형식(TYPE)	N(min)	L	W	I	H	P	Ø (min.)	M	적용적합전선 (Suitable Wire)	단자볼트 (Terminal Bolt)	조임토크 (Torque)
YS FT010-02	Ø8.0	52	24	3.5	13	8.2	4.0	42	1.5mm ² (16AWG) (Ø3.4)	M3.5	8kgf·cm
YS FT010-03											

15A



형식(TYPE)	N(min)	L	W	I	H	P	Ø (min.)	M	적용적합전선 (Suitable Wire)	단자볼트 (Terminal Bolt)	조임토크 (Torque)
YS FT015-06	Ø8.0	87	24	5.0	19	8.7	4.0	76.5	2.5mm ² (14AWG) (Ø4.2)	M3.5	8kgf·cm
YS FT015-10		131						121.5			

20A



형식(TYPE)	N(min)	L	W	I	H	P	Ø (min.)	M	적용적합전선 (Suitable Wire)	단자볼트 (Terminal Bolt)	조임토크 (Torque)
YS FT020-03	Ø8.0	56	30.2	5.0	19	8.7	4.0	45	2.5mm ² (14AWG) (Ø4.2)	M4.0	12kgf·cm
YS FT020-04		67						56			
YS FT020-06		89						78			
YS FT020-10		136						124.5			
YS FT020-12		162						150.5			
YS FT020-15		200						188			
YS FT020-20		257						245			

TERMINAL BLOCKS


30A



CE

형식(TYPE)	N(min)	L	W	I	H	P	Ø (min.)	M	적용적합전선 (Suitable Wire)	단자볼트 (Terminal Bolt)	조임토크 (Torque)
YS FT030-03	Ø8.0	67	35	13	26	10.3	4.0	54.5	4mm ² (12AWG) (Ø5.6)	M4.5	15kgf·cm
YS FT030-04		79						68.0			
YS FT030-06		102.5						91.0			
YS FT030-10		156						144.5			

60A



CE

형식(TYPE)	N(min)	L	W	I	H	P	Ø (min.)	M	적용적합전선 (Suitable Wire)	단자볼트 (Terminal Bolt)	조임토크 (Torque)
YS FT060-03	Ø7.5	83.5	41	20	32.5	15.5	5.0	27.5	16mm ² (6AWG) (Ø9)	M6.0	25kgf·cm
YS FT060-04		111						55.0			

100A



형식(TYPE)	N(min)	L	W	I	H	P	Ø (min.)	M	적용적합전선 (Suitable Wire)	단자볼트 (Terminal Bolt)	조임토크 (Torque)
YS FT100-03	Ø11.5	105.5	55.5	23	38	23	5.0	34.8	50mm ² (0AWG) (Ø13.3)	M8.0	60kgf·cm
YS FT100-04		140					6.0	69.6			


150A



형식(TYPE)	N(min)	L	W	I	H	P	Ø (min.)	M	적용적합전선 (Suitable Wire)	단자볼트 (Terminal Bolt)	조임토크 (Torque)
YS FT150-03	Ø11.5	116	67.5	26	43	26	7.0	38.8	70mm ² (00AWG) (Ø15.5)	M8.0	60kgf·cm
YS FT150-04		154.8					7.0	77.2			


단자대

200A




형식(TYPE)	N(min)	L	W	I	H	P	Ø (min.)	M	적용적합전선 (Suitable Wire)	단자볼트 (Terminal Bolt)	조임토크 (Torque)
YS FT200-03	Ø11.5	134.8	73	29.5	46.5	29	6.5	45	120mm ² (250kcmil) (Ø22.3)	M10.0	100kgf·cm
YS FT200-04		180					7.5	89.5			

300A



형식(TYPE)	N(min)	L	W	I	H	P	Ø (min.)	M	적용적합전선 (Suitable Wire)	단자볼트 (Terminal Bolt)	조임토크 (Torque)
YS FT300-03	Ø12.5	155.5	83	33.5	49.4	33.7	8.0	51.5	185mm ² (350kcmil) (Ø32.7)	M12.0	120kgf·cm
YS FT300-04		207						103.5			

400A



형식(TYPE)	N(min)	L	W	I	H	P	Ø (min.)	M	적용적합전선 (Suitable Wire)	단자볼트 (Terminal Bolt)	조임토크 (Torque)
YS FT400-03	Ø12.5	163.0	90	33.5	50	34.0	8.4	55.0	185mm ² (350kcmil) (Ø32.7)	M12.0	120kgf·cm
YS FT400-04		218.0						110.0			

500A



형식(TYPE)	N(min)	L	W	I	H	P	Ø (min.)	M	적용적합전선 (Suitable Wire)	단자볼트 (Terminal Bolt)	조임토크 (Torque)
YS FT500-03	Ø12.5	193.0	99	43.5	60	43	8.4	65.5	300mm ² (600kcmil) (Ø37.6)	M12.0	120kgf·cm
YS FT500-04		258.5						131.0			

600A



형식(TYPE)	N(min)	L	W	I	H	P	Ø (min.)	M	적용적합전선 (Suitable Wire)	단자볼트 (Terminal Bolt)	조임토크 (Torque)
YS FT600-03	Ø12.5	193.0	99	43.5	60	43	8.4	65.5	300mm ² (600kcmil) (Ø37.6)	M12.0	120kgf·cm
YS FT600-04		258.5						131.0			