




耐高温轴流风机

Endure Temperature Bearing-flow Fan



172×150×38mm




金属扇叶

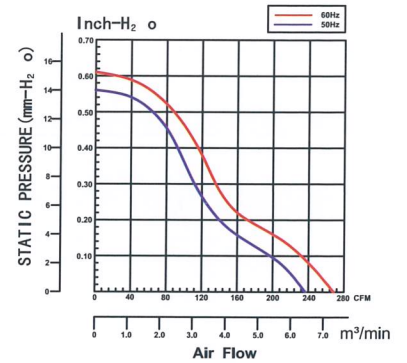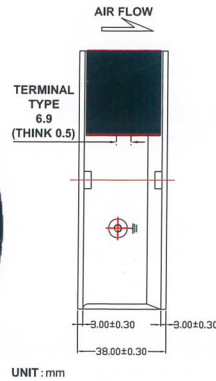

Model (型号)	Part Number Terminal Leadwire (端子/出线)	Bearing System (培林)	Rated Voltage (V) (电压)	Freq. (Hz) (频率)	Current (A) (电流)	Input power (W) (功率)	Speed (RPM) (转速)	Air Flow (CFM) (风量)	Air Flow (m³/min) (风量)	Static Pressure (Inch-H ₂ O) (静压)	Noise Level (dB-A) (噪音)	Weight (g) (重量)
SJ1738HA1	SJ1738HA1BAT	Ball	110/120	50/60	0.24/0.24	25/23	2850/3400	175/220	4.95/6.22	0.65/0.75	54/58	690
SJ1738HA2	SJ1738HA2BAT	Ball	220/240	50/60	0.12/0.11	25/24	2850/3400	175/220	4.95/6.22	0.65/0.75	54/58	690

120×120×38mm

金属扇叶

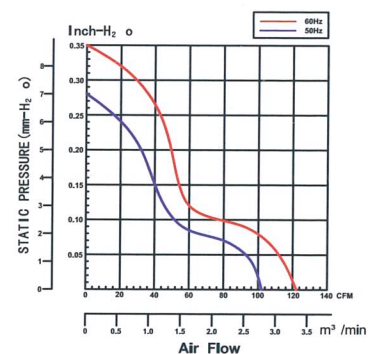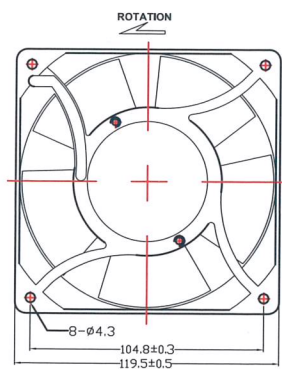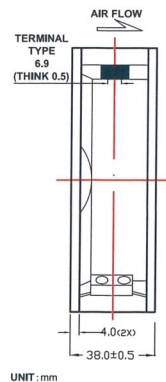

Model (型号)	Part Number Terminal Leadwire (端子/出线)	Bearing System (培林)	Rated Voltage (V) (电压)	Freq. (Hz) (频率)	Current (A) (电流)	Input power (W) (功率)	Speed (RPM) (转速)	Air Flow (CFM) (风量)	Air Flow (m³/min) (风量)	Static Pressure (Inch-H ₂ O) (静压)	Noise Level (dB-A) (噪音)	Weight (g) (重量)
SJ1238HA1	SJ1238HA1BAT (L) SJ1238HA1SAT (L)	Ball Sleeve	110/120	50/60	0.13/0.11	12.5/11	2750/3250	105/123	2.97/3.48	0.28/0.35	47/49	536
SJ1238HA2	SJ1238HA2BAT (L) SJ1238HA2SAT (L)	Ball Sleeve	220/240	50/60	0.06/0.05	13.0/12.0	2750/3250	105/123	2.97/3.48	0.28/0.35	47/49	536

Above specification is only for reference and subject to change without notice.

以上数据仅供参考，如有变更恕不另行通知。