


REPEATABILITY OF SKIP SIGNAL : 0.001mm
 DEGREES OF PROTECTION : IEC IP67




LED LAMP
 NORMALLY LIT
 PUSH UNLIT

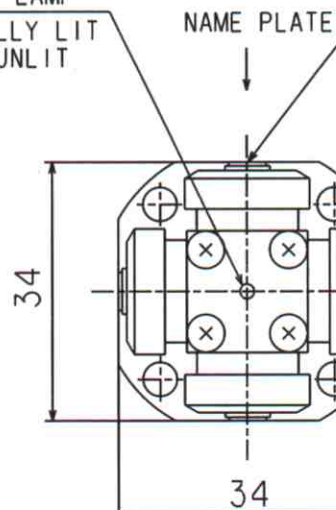

CONTACT
 TUNGSTEN CARBIDE $\phi 5$ FLAT
 STROKE (OVER TRAVEL) 2
 ACTIVATING FORCE
 (RETURN FORCE)
 $2^{+0.2}_{-0}$ N OR MORE

$\perp$	0.005/5	B
//	0.005/5	A

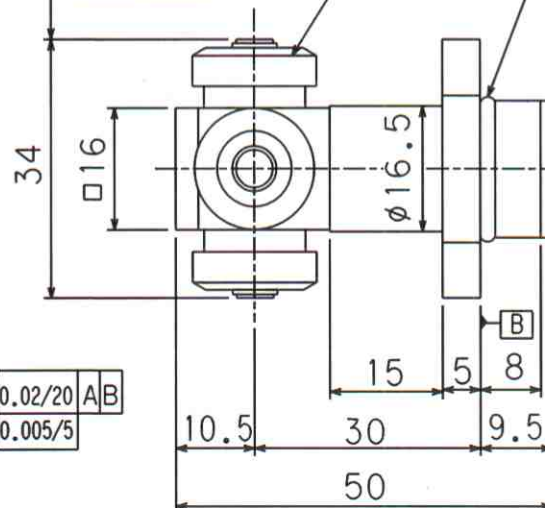


$\perp$	0.02/20	A	B
//	0.005/5		

CORROSION RESISTANCE

O RING S16


7 OR LARGER

MINIMUM BENDING
 RADIUS: 7mm

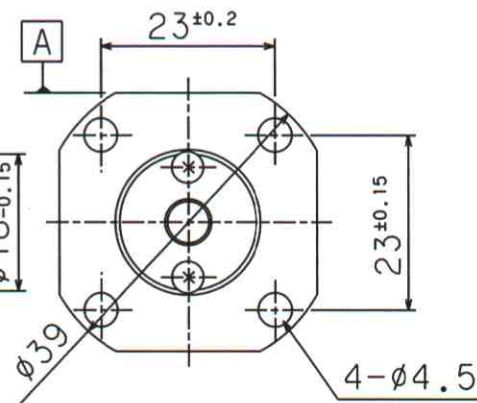


SET NUMBER H4A-53-01S

COMPOSITION
 SENSOR H4A-53-01H
 EXTENSION CABLE CW3-3

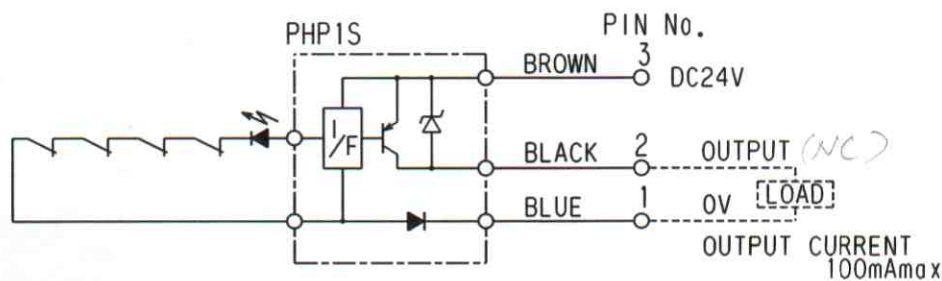

CIRCUIT DRAWING'S REVISED '03.6.3

¥H4A¥4A5301SE

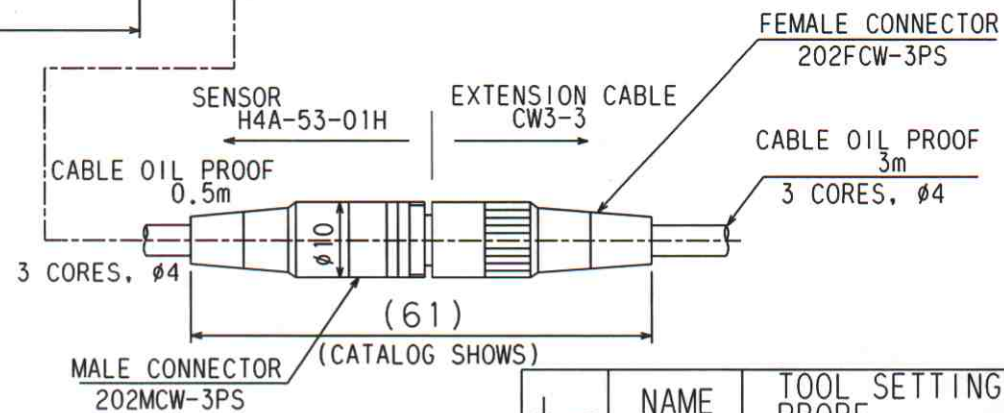

MINIMUM BENDING RADIUS: 7mm

APR	CHK	DRA
<i>Am</i>	<i>Kondo</i>	01.2.15 HIJIKATA

	NAME	TOOL SETTING PROBE
	DRAWING NUMBER	H4A-53-01S
1/1	METROL LTD.	