

Option mit anderem Rotorgewinde "A":

Option with other rotor thread "A":

GR 20 F-100 RH: A = 3/4" NPT RH

GR 20 F-200 RH: A = 1"-14 UNS RH

GR 20 F-400 RH: A = M22x1,5 RH

GR 20 F-401 RH: A = M27x1,5 RH

GR 20 F-402 RH: A = M35x1,5 RH



TURIAN in Deutschland: MOEBIUS GmbH, Im Herrgarten 24

D-65527 Niedernhausen

Tel.: +49-6127-78544, Fax: -78548

Email: info@moebius-niedernhausen.de

Web: www.moebius-niedernhausen.de

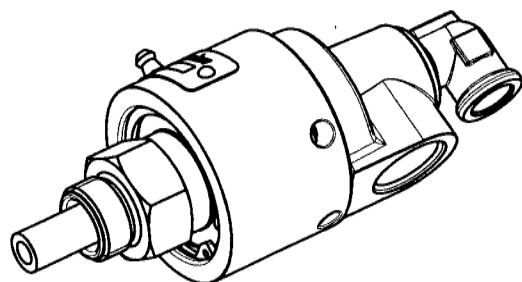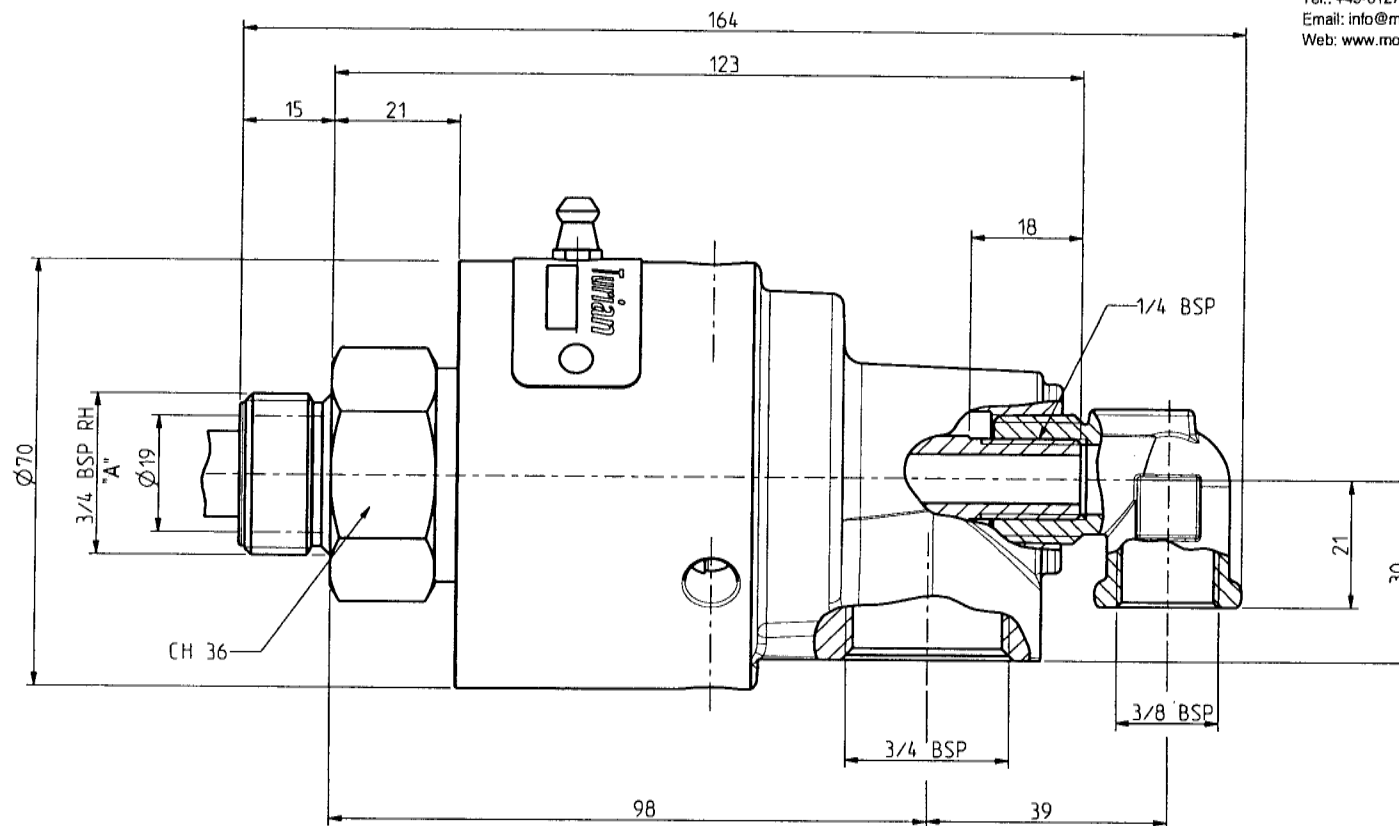

TARGHETTA	
	GR 20 F-RH
p	40 bar
T	170 °C
N	3000 RPM

GR 20 F-RH

SIPHON TUBE NOT INCLUDED

5				quantità	RUGOSITÀ' μm  Ra - 0.2 Ra - 0.6 Ra - 3.2 Ra - 12 Grezzo		
4							
3						smussi non quotati	0.3 mm
2							
1						trattamento	
descrizione modifica		data	firma				
materiale			componente		modello		
			GR20F-ASS		GR 20 F		
data		firma		TOLLERANZA GENERALE DI LAVORAZIONE GRADO DI PRECISIONE UNI 5307 ☐ Grosso ☐ Medio ☐ Preciso	scala 1,000		
27-04-05							
descrizione							
GIUNTO 3/4" GAS							
N° disegno				8232	A		

TURIAN
Castellanza